

# The DMAPS Upgrade of the Belle II Vertex Detector

Benjamin Schwenker (University of Göttingen)  
On Behalf of the Belle II VTX Upgrade Group

PSD13

7 Sep. 2023



GEORG-AUGUST-UNIVERSITÄT  
GÖTTINGEN




Bundesministerium  
für Bildung  
und Forschung




# Belle II and SuperKEKB

- Located at the SuperKEKB collider in Tsukuba/Japan
- Asymmetric  $e^+e^-$  collider at  $\sqrt{s} = M_{\Upsilon(4S)} = 10.58$  GeV
- Luminosity frontier experiment
- Target  $\mathcal{L}_{int} = 50 \text{ ab}^{-1}$ 
  - Current  $\mathcal{L}_{int} = 428 \text{ fb}^{-1}$  since 2019
  - Long-shutdown since last June
  - Restart at beginning of 2024
- Record  $\mathcal{L}_{max} = 0.47 \cdot 10^{35} \text{ cm}^{-2} \text{ s}^{-1}$  in June 2022
- Target peak  $\mathcal{L} = 6 \cdot 10^{35} \text{ cm}^{-2} \text{ s}^{-1}$ 
  - Upgrade  $\sim 2027$  foreseen
    - High currents & nano-beam scheme
    - Challenging background conditions

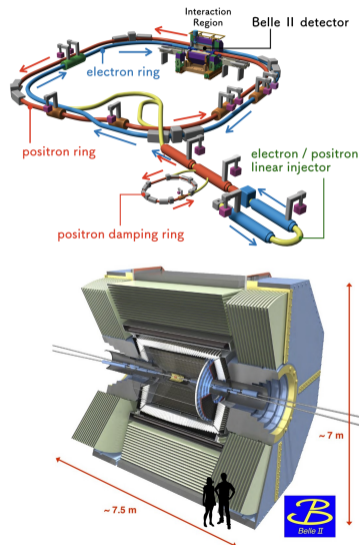



# Belle II and SuperKEKB

- Located at the SuperKEKB collider in Tsukuba/Japan
- Asymmetric  $e^+e^-$  collider at  $\sqrt{s} = M_{\Upsilon(4S)} = 10.58$  GeV
- Luminosity frontier experiment
- Target  $\mathcal{L}_{int} = 50 \text{ ab}^{-1}$ 
  - Current  $\mathcal{L}_{int} = 428 \text{ fb}^{-1}$  since 2019
  - Long-shutdown since last June
  - Restart at beginning of 2024
- Record  $\mathcal{L}_{max} = 0.47 \cdot 10^{35} \text{ cm}^{-2} \text{ s}^{-1}$  in June 2022
- Target peak  $\mathcal{L} = 6 \cdot 10^{35} \text{ cm}^{-2} \text{ s}^{-1}$ 
  - Upgrade  $\sim 2027$  foreseen
    - High currents & nano-beam scheme
    - Challenging background conditions

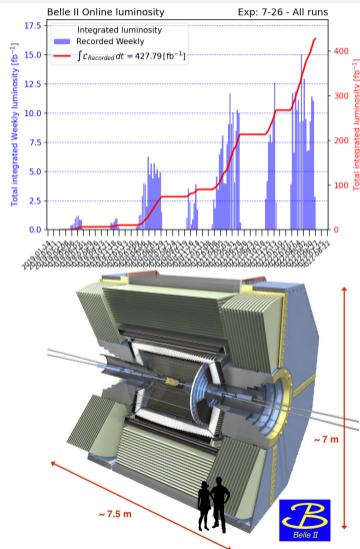


# Belle II Vertex detector

- Current Vertex Detector (VXD):
  - 2 inner layers with DEPFET based pixel sensors
  - 4 layers double sided strip detector
- Low mass ladder design with total material budget of  $3.8\%X_0$
- PXD:
  - Thin sensors ( $75\mu\text{m}$ ) and small pixel pitch ( $50\text{-}75\ \mu\text{m}$ )
  - Long integration time ( $20\mu\text{s}$ )
- SVD :
  - Very good cluster time resolution  $3\ \text{ns}$  , but long strips ( $6\ \text{cm}$ )
  - Spatial resolution of  $10\text{-}25\ \mu\text{m}$

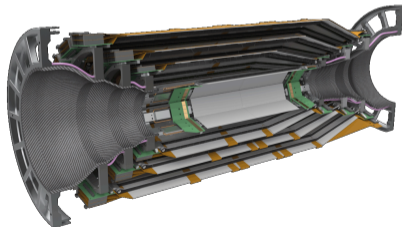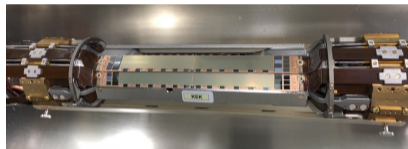



# VXD in High Luminosity Environment

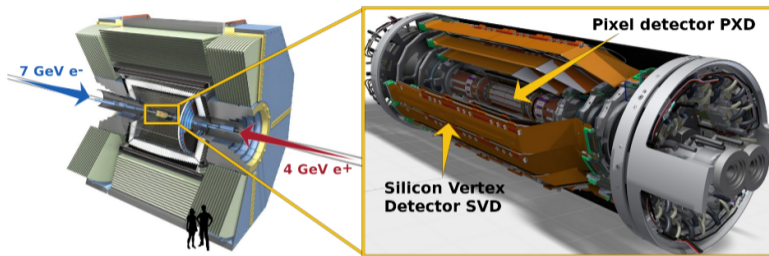

- Current PXD occupancy  $< 1\%$
- Background extrapolation uncertain  $\rightarrow$  3 scenarios
- Performance degradation possible for higher occupancy
- May reach limits of current detector for high lumi. environment occupancies  $\gtrsim 3\%$


# Vertex Detector Upgrade Proposal

- SuperKEKB upgrade likely to change interaction region for high luminosity environment during LS2
- Opportunity to upgrade current vertex detector with 5 straight layers Depleted CMOS MAPS
- Reduced material budget  $\sim 2.5\%X_0$
- Increase space-time granularity
- Requirements:
  - Robust against inner layer background
  - Hit-rate up to  $120 \text{ MHz/cm}^2$
  - Resolution  $< 15 \mu\text{m}$
  - High efficiency
  - NIEL  $5 \cdot 10^{13} \text{ n}_{\text{eq}}/\text{cm}^2/\text{year}$

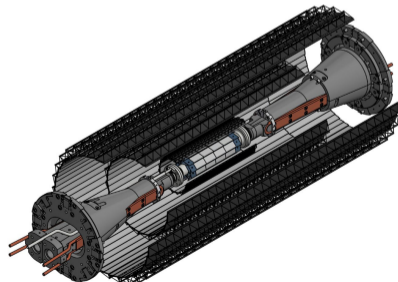



# VTX detector mechanics

- 5 straight DMAPS layers
- Radii at 14, 22, 39, 90, 140 mm
- Ladder/stave design
- iVTX:
  - L1 & L2
  - All silicon ladders
  - Air cooling
  - $\sim 0.1\%X_0$
- oVTX:
  - L3 & L4 & L5
  - Carbon-fibre structure support frame
  - Cooling plate with water cooling
  - $\sim 0.3 - 0.5\%X_0$  L3 & L4
  - $\sim 0.8\%X_0$  L5

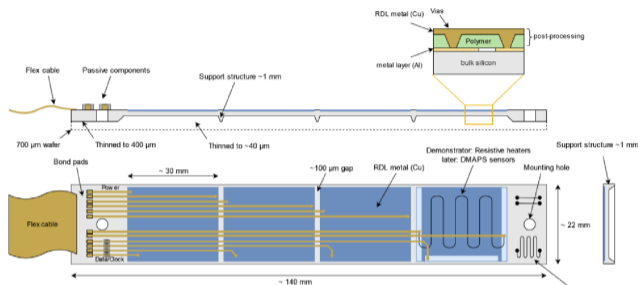




# VTX Tracking Performance

- Based on simulations of 1000  $B\bar{B}$  events and respective overlay background files
- Background overlays range from best case scenario (1) to worst case (3)
- VTX gives better tracking efficiency than VXD for Full Tracking (vertex tracking combined with CDC)
- In particular soft pion signal efficiency effected greatly

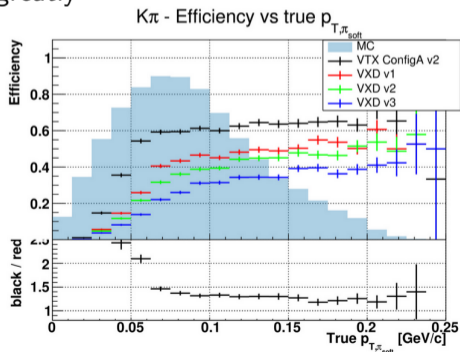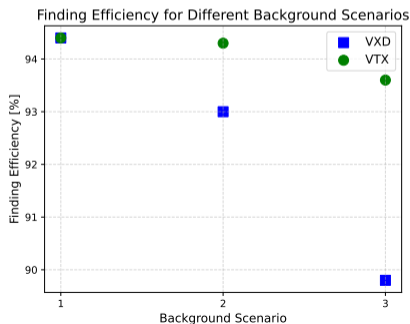




# TJ-Monopix2

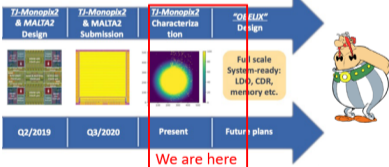

Nucl. Instrum. Methods Phys. Res. A, 978  
(2020) 164460

- Developed for ATLAS
- DMAPS in TowerJazz (TJ) 180 nm process
- Proposed as starting point for OBELIX design
- Copy of pixel matrix + trigger adaptation in periphery
- $2 \times 2 \text{ cm}^2$  chip,  $512 \times 512$  pixels
- Pixel pitch:  $33.04 \times 33.04 \mu\text{m}^2$
- Expected from design:
  - $\sim 100 e^-$  min. threshold
  - 5-10  $e^-$  threshold dispersion (tuned)
  - $>97\%$  efficiency at  $10^{15} n_{\text{eq}}/\text{cm}^2$
  - $\sim 5 e^-$  noise
  - Fully efficient with hit rate  $120 \text{ MHz}/\text{cm}^2$
  - MIP  $\sim 2500e^-$


## TJ-Monopix2

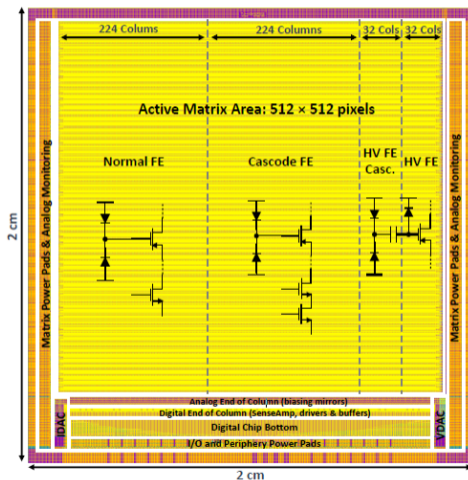

4 pixel Front-End (FE) flavours with differences in pre-amplifier, sensor coupling, biasing

- Normal and Cascode FE:
  - DC coupled to charge collection electrode
- HV and HV Cascode FE:
  - AC coupled to charge collection electrode
  - Allows higher bias voltages
- Cascode and Non-Cascode versions:
  - Differ only by one transistor → designed to increase gain


# Lab Set-up

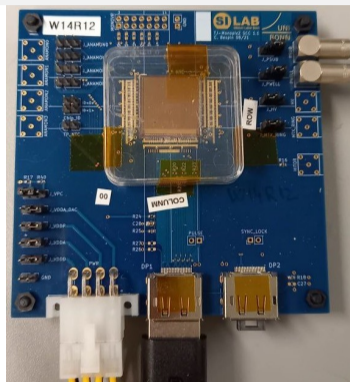

- Commercial 2 channel power supply
- 1.8 V supply voltage
- Up to 6/60 V bias voltage



Simple and user-friendly set-up:

- Carrier PCB with FPGA readout
- Bdaq53 board with TJ-Monopix2 firmware based on Basil

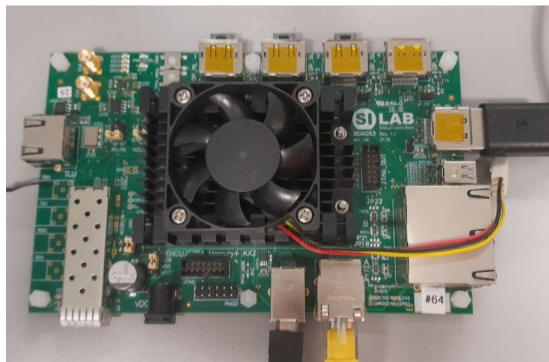


# TJ-Monopix2 lab testing


- Internal injection tests  
→ inject known charge in pre-amplifier
- Output: ToT (Time over Threshold)
- ToT in units of 25 ns 7-bit encoded

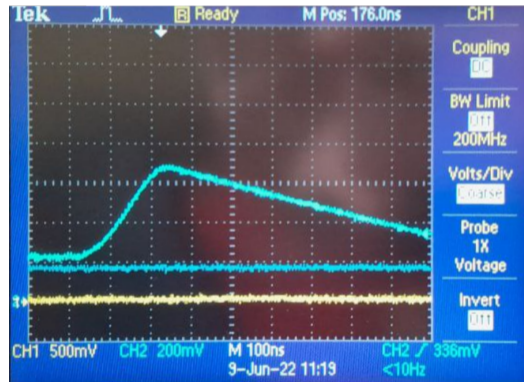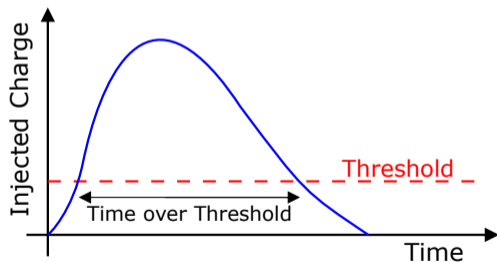

# TJ-Monopix2 lab testing



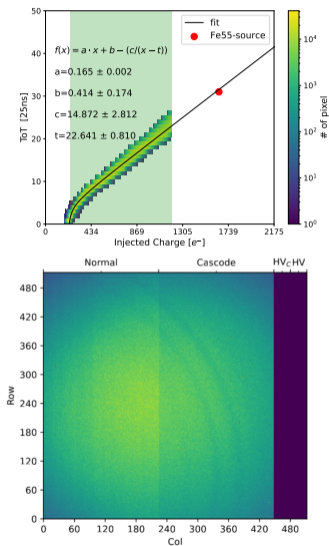


- Testing in Bonn, Pisa, HEPHY, CPPM, Göttingen
- Calibrate ToT responds with injection test
- Absolute calibration with Fe<sup>55</sup> agrees with design
- Measurements ranging 8.5 - 10 e-/DAC

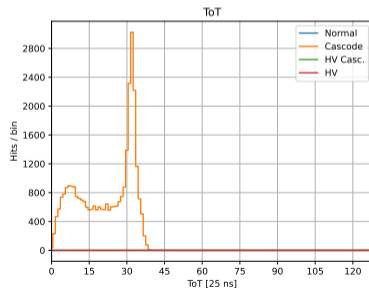




# TJ-Monopix2 lab testing

- S-curve tests with internal injection
- Determine threshold
- Tune sensor for low threshold and low dispersion
- Threshold:  $280e^- \pm 17e^-$
- Noise:  $8e^-$



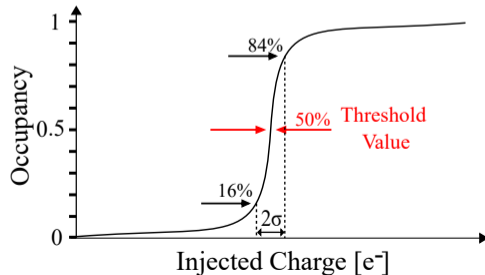


# TJ-Monopix2 lab testing

- S-curve tests with internal injection
- Determine threshold
- Tune sensor for low threshold and low dispersion
- Threshold:  $280e^- \pm 17e^-$
- Noise:  $8e^-$

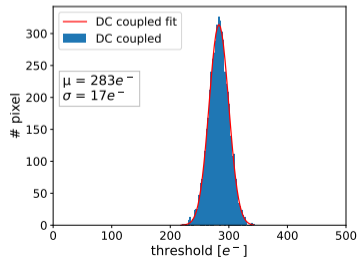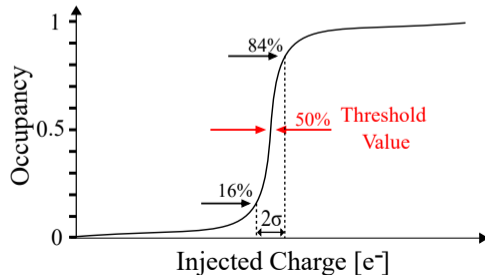

# Beam Test Set-up

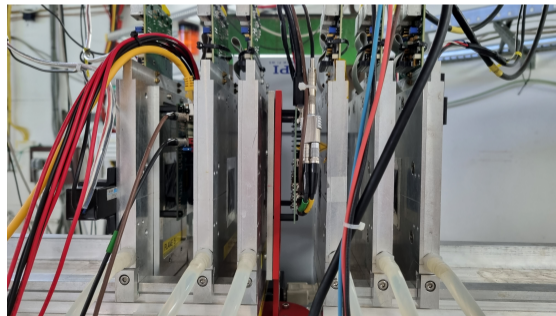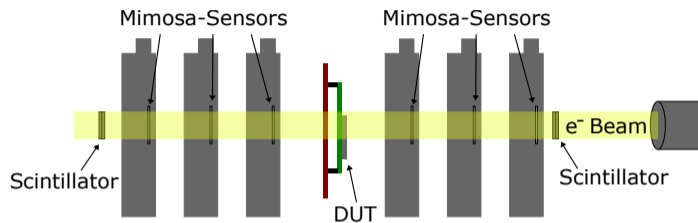



- 3-5 GeV  $e^-$  at DESY June 2022
- Mimosa EUDET-Telescope
- Unirradiated chips
- Preliminary settings used  $\rightarrow$   
Very high thresholds  $\sim 500 e^-$





# Efficiency and Resolution

- 4 GeV, Perpendicular incidents
- Hit efficiency:  $\epsilon = \frac{n_{\text{matched}}}{n_{\text{tracks}}}$
- $\epsilon$  at  $\sim 500e^-$  threshold:  $99.54 \pm 0.04 \%$
- $\sim 9.15 \mu\text{m}$  cluster position resolution  
 $\rightarrow$  Better than  $\text{pitch}/\sqrt{12} \sim 9.5 \mu\text{m}$
- Next: Irradiation to  $10^{14} - 10^{15} \text{ n}_{\text{eq}}/\text{cm}^2$
- Test beam in July 2023

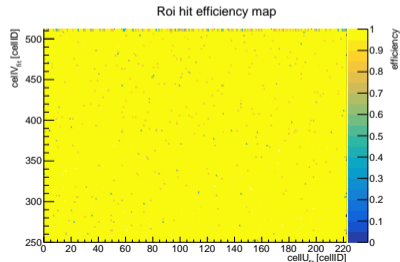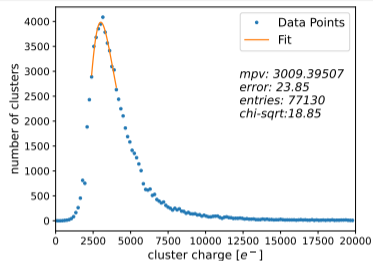

# Efficiency and Resolution

- 4 GeV, Perpendicular incidents
- Hit efficiency:  $\epsilon = \frac{n_{\text{matched}}}{n_{\text{tracks}}}$
- $\epsilon$  at  $\sim 500e^-$  threshold:  $99.54 \pm 0.04 \%$
- $\sim 9.15 \mu\text{m}$  cluster position resolution  
 $\rightarrow$  Better than  $\text{pitch}/\sqrt{12} \sim 9.5 \mu\text{m}$
- Next: Irradiation to  $10^{14} - 10^{15} \text{ n}_{\text{eq}}/\text{cm}^2$
- Test beam in July 2023

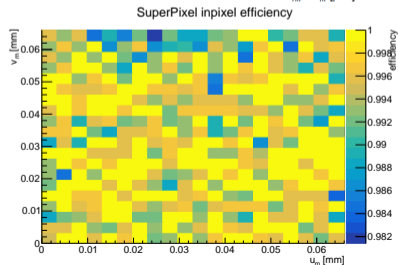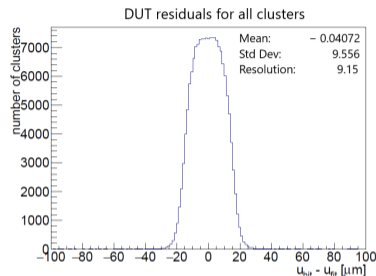

# Conclusion and Outlook

## Conclusion:

- Important to carefully characterise TJ-Monopix2, since sensor matrix design will be carried over to OBELIX
- Main performance figures of non-irradiated TJ-Monopix2 matching requirements
- Successful test beam with stable module operation over long times

## Outlook:

- Analysis of testbeam with irradiated sensors in July 2023 at DESY
- OBELIX design, targeting submission in autumn 2023
- Finalization of VTX conceptual design report

Back up

## DEPFET – DEpleted P-channel Field Effect Transistor

➤ Each pixel is a p-channel FET on a completely depleted bulk (sideward depletion). Charge is collected by drift

➤ A deep n-implant creates a potential minimum for electrons under the gate (internal gate)

➤ Signal electrons accumulate in the internal gate and modulate the transistor current ( $g_m \approx 500 \text{ pA/e}$ )


➤ Accumulated charge can be removed by a clear contact

➤ Excellent signal-to-noise ratio


➤ Low power consumption

➤ Thin detectors

**Features**


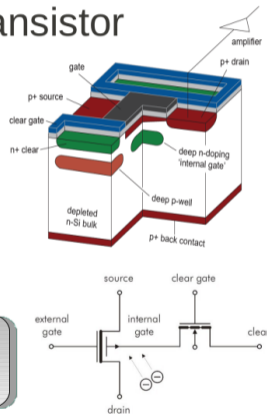


## The PXD module: Readout electronics

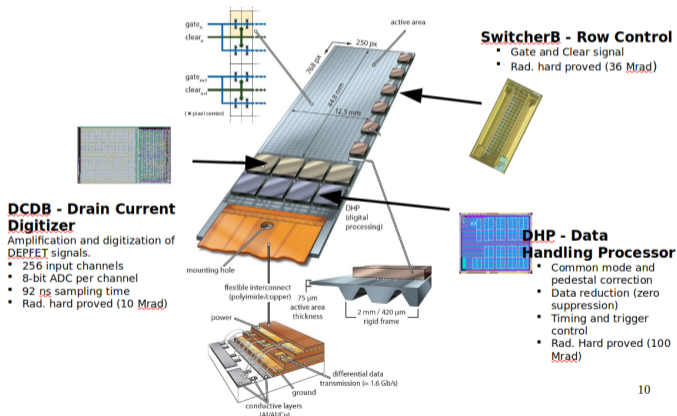

# Nano-beam and beam background



- Squeeze beam for smaller cross-section
- High Luminosity backgrounds
  - scales with luminosity
    - $2\gamma$
    - radiative bhabha-scattering
    - elastic scattering of  $e^-e^+$
- Storage background
- Injection backgrounds

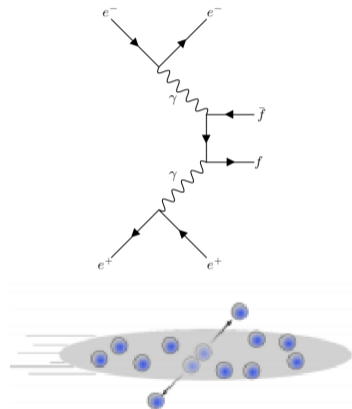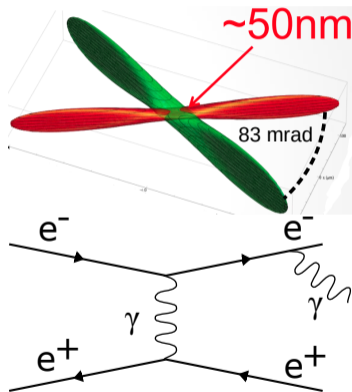

# In-Pixel calibration

- Conversion of ToT to charge in electron, before clustering
- Inj. charge in DAC  $\cdot 10.1 =$  charge in e
- Calibration parameters from scans on the sensor

• FF



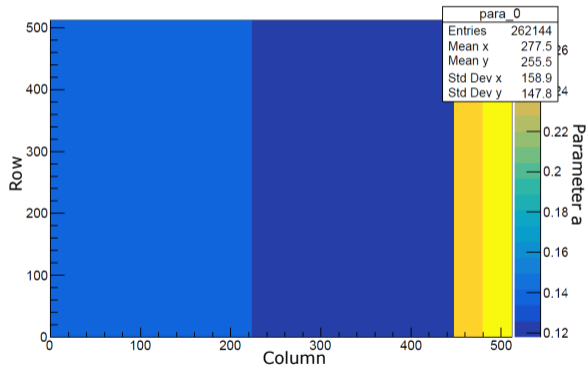
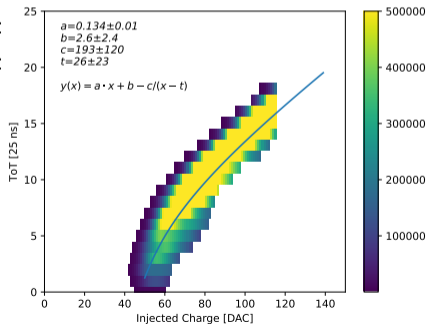





# Residuals

- W5R9: epi module

- Residuals at 3V PSUB/PWELL
- Uncertainty of telescope intersection at DUT plane  $\sim 3.5 \mu\text{m}$
- Expected res. from pixel pitch:  $9.54 \mu\text{m}$
- Resolution of  $9.14 \mu\text{m}$**

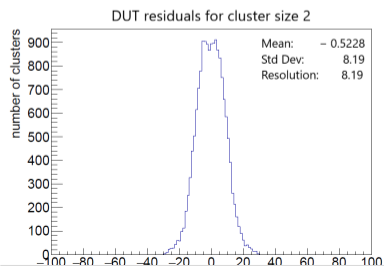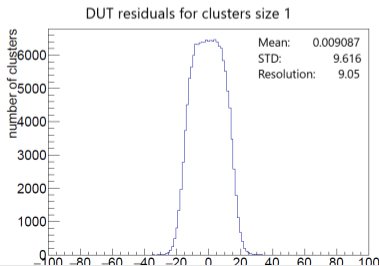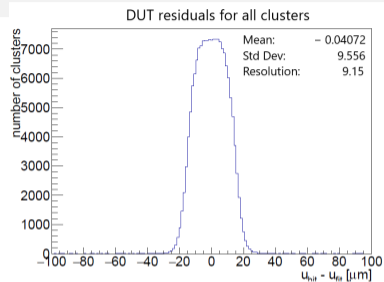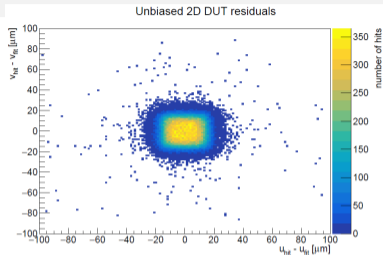

# TJ-Monopix2

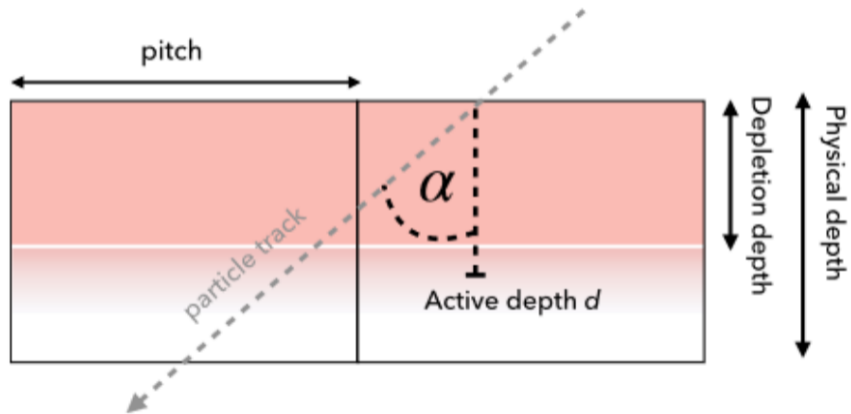

# TJ-Monopix2

Register	Default Settings ("Göttingen ")	Improved Settings ("Patrick")	HV Settings	HV Settings W8R3 "HEPHY"
ITHR	64	<b>50</b>	<b>30</b>	<b>30</b>
IBIAS	<b>50</b>	100	<b>60</b>	<b>60</b>
VRESET	143	143	<b>100</b>	<b>95</b>
ICASN	0	0	<b>8</b>	<b>8</b>
VCASP	93	93	<b>40</b>	<b>40</b>

# VTX Digitizer: from tracks to digits


Based on digitizer for PXD in the Belle II software. Rather simple and generic code.

- Start: List of Geant4 steps on sensitive (depleted) Si
- Check if the particle hit is inside the integration time window  $T_{int}$
- Split the path of the particle in the VTX depleted Si into segments and drift the charges from the center of each segments.
  - The transverse diffusion (coefficient  $D$ ) follows a Gaussian with a width defined as :  

$$\text{sigmaDiffus} = \text{sqrt} ( D * e / 2 )$$
- Integrate smeared charge clouds per pixel area and add the noise to the charge
- Subtract hit threshold  

$$\text{Charge} -= \text{chargeThreshold}$$
- Check if Charge > 0
- Amplify and digitize charge  

$$\text{ToT} = F(\text{Charge})$$




# Test beam simulations

- Simplified simulation in basf2 software. No simulation of telescope and tracking is done, just using true hits instead.
- ParticleGun shooting electrons at 4.0 GeV perpendicular to 1 VTX sensor in +X


uPitch: 0.003304 cm  
vPitch : 0.003304 cm  
Active Thickness: 0.0025 cm

Charge Threshold: 500  $e^-$   
Electronic Noise: 20  $e^-$   
Max ToT : 127 (7 bits)  
D: 8.5e-05 cm

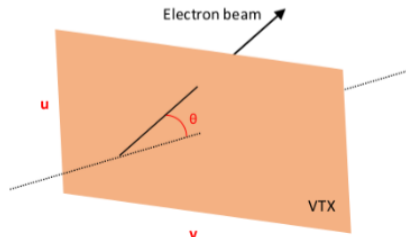


# Efficiency

$0^\circ$

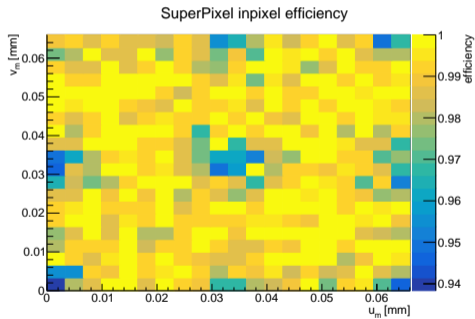


$10^\circ$

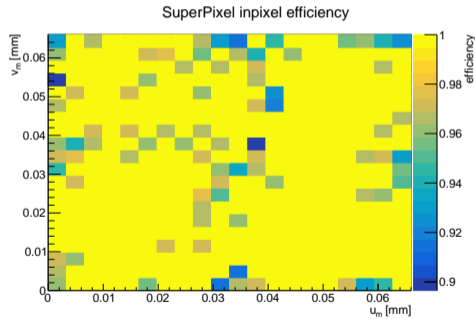


# DESY Test Beam Facility

- Duration: 2022-06-27 to 2022-07-11
- Beam line: TB22
- 2-5 GeV electron beam

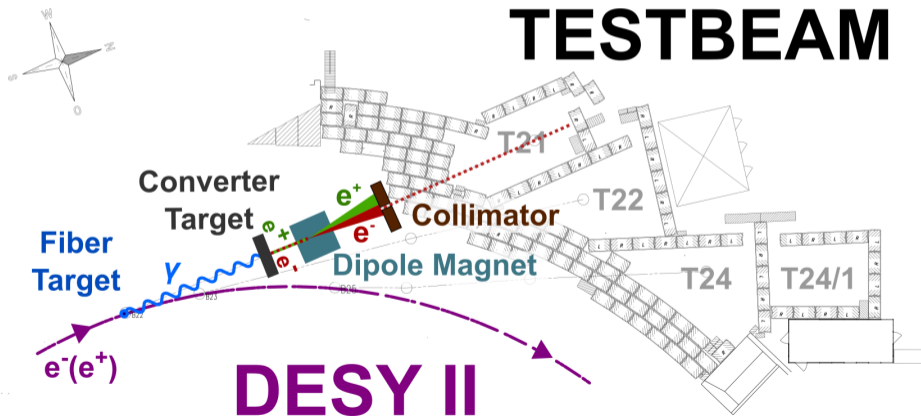


## test beam Set-up

- DESY test beam facility
- AIDA TLU v2
- Mimosa26-based DURANTA Telescope
- Upstream scintillator

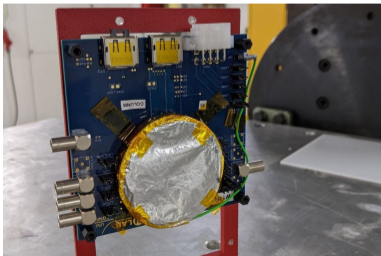

Benjamin Schwenker

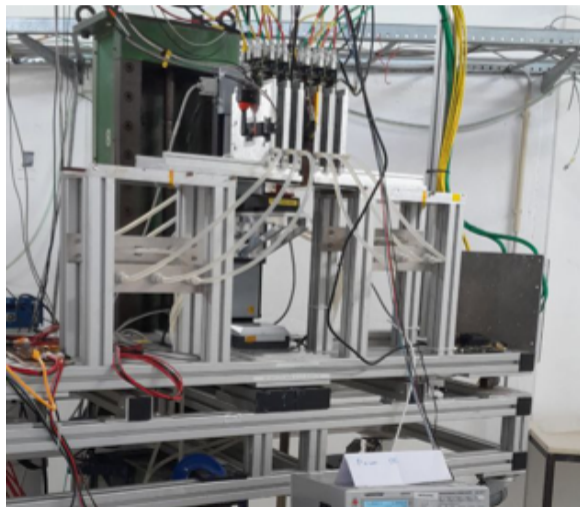

VTX Upgrade for Belle II



# VTX Tracking Performance

## Tracking Validation results

SVD/CDC only  
Full tracking

Based on simulated sample of 1000  $\bar{B}B$  events + respective overlay background files

Slides by Jarek

Bkg type	Finding Efficiency [%]	Hit Efficiency [%]	Fake Rate [%]	Clone Rate [%]	SVD		bkg hits only CDC	
					SVD L3 occup. [%]	Hit Rate (R) [kHz/wire] (inner / outer)	ONline (u/v)	OFFline (u/v)
v1	94.6 / 81.3 94.4	94.8 / 86.4 82.0	4.9 / 2.5 4.6	0.5 / 0.7 3.9	4.3 / 3.5 2.2 / 2.1	204.0 / 145.9 Total: 148.9		
v2	92.9 / 78.2 93.0	93.6 / 83.8 79.5	8.1 / 2.9 6.7	2.7 / 0.7 4.2	7.2 / 5.5 4.2 / 3.9	308.7 / 203.8 Total: 209.1		
v3	89.3 / 70.3 89.8	91.1 / 80.0 74.8	18.0 / 3.2 13.8	2.6 / 0.8 4.5	12.2 / 9.2 7.5 / 7.1	469.5 / 293.6 Total: 302.4		

VTX only/CDC only  
Full tracking

From Benjamin study

$$R_{av} = N / (408.7 \text{ ns} * 1200 \text{ wires} + 754.6 \text{ ns} * 13056 \text{ wires})$$

N - total number of CDC hits (per event)

BG type	Finding efficiency	Hit efficiency	Fake rate	Clone rate	$R_{av}$ kHz/wire	VTX L1 occupancy
v1	0.979/0.813 0.944	0.943/0.866 0.824	0.043/0.028 0.043	0.014/0.010 0.048	219	0.0016%
v2	0.974/0.781	0.943/0.841	0.063/0.031	0.014/0.008	276	0.0023%