

Experimental techniques - TSC and DLTS

Daniel Hynds

Disclaimer

I am definitely not an expert in this topic!


Defect characterisation is tricky - there is a lot of solid-state physics involved, a lot of caveats to the measurements, and a whole ton of different defects that can occur inside silicon (especially when recombining with oxygen, carbon, boron, phosphorous, vacancies... etc.)

This lecture is meant to illustrate some typical solid-state techniques and how they can be used to investigate such defects, not to describe all of the radiation-induced defects that exist

Energy levels in semiconductors

Charge carrier production in semiconductors relates to transitions from the valence to conduction band

- In depleted silicon detectors, this is the mechanism by which interacting particles are observed

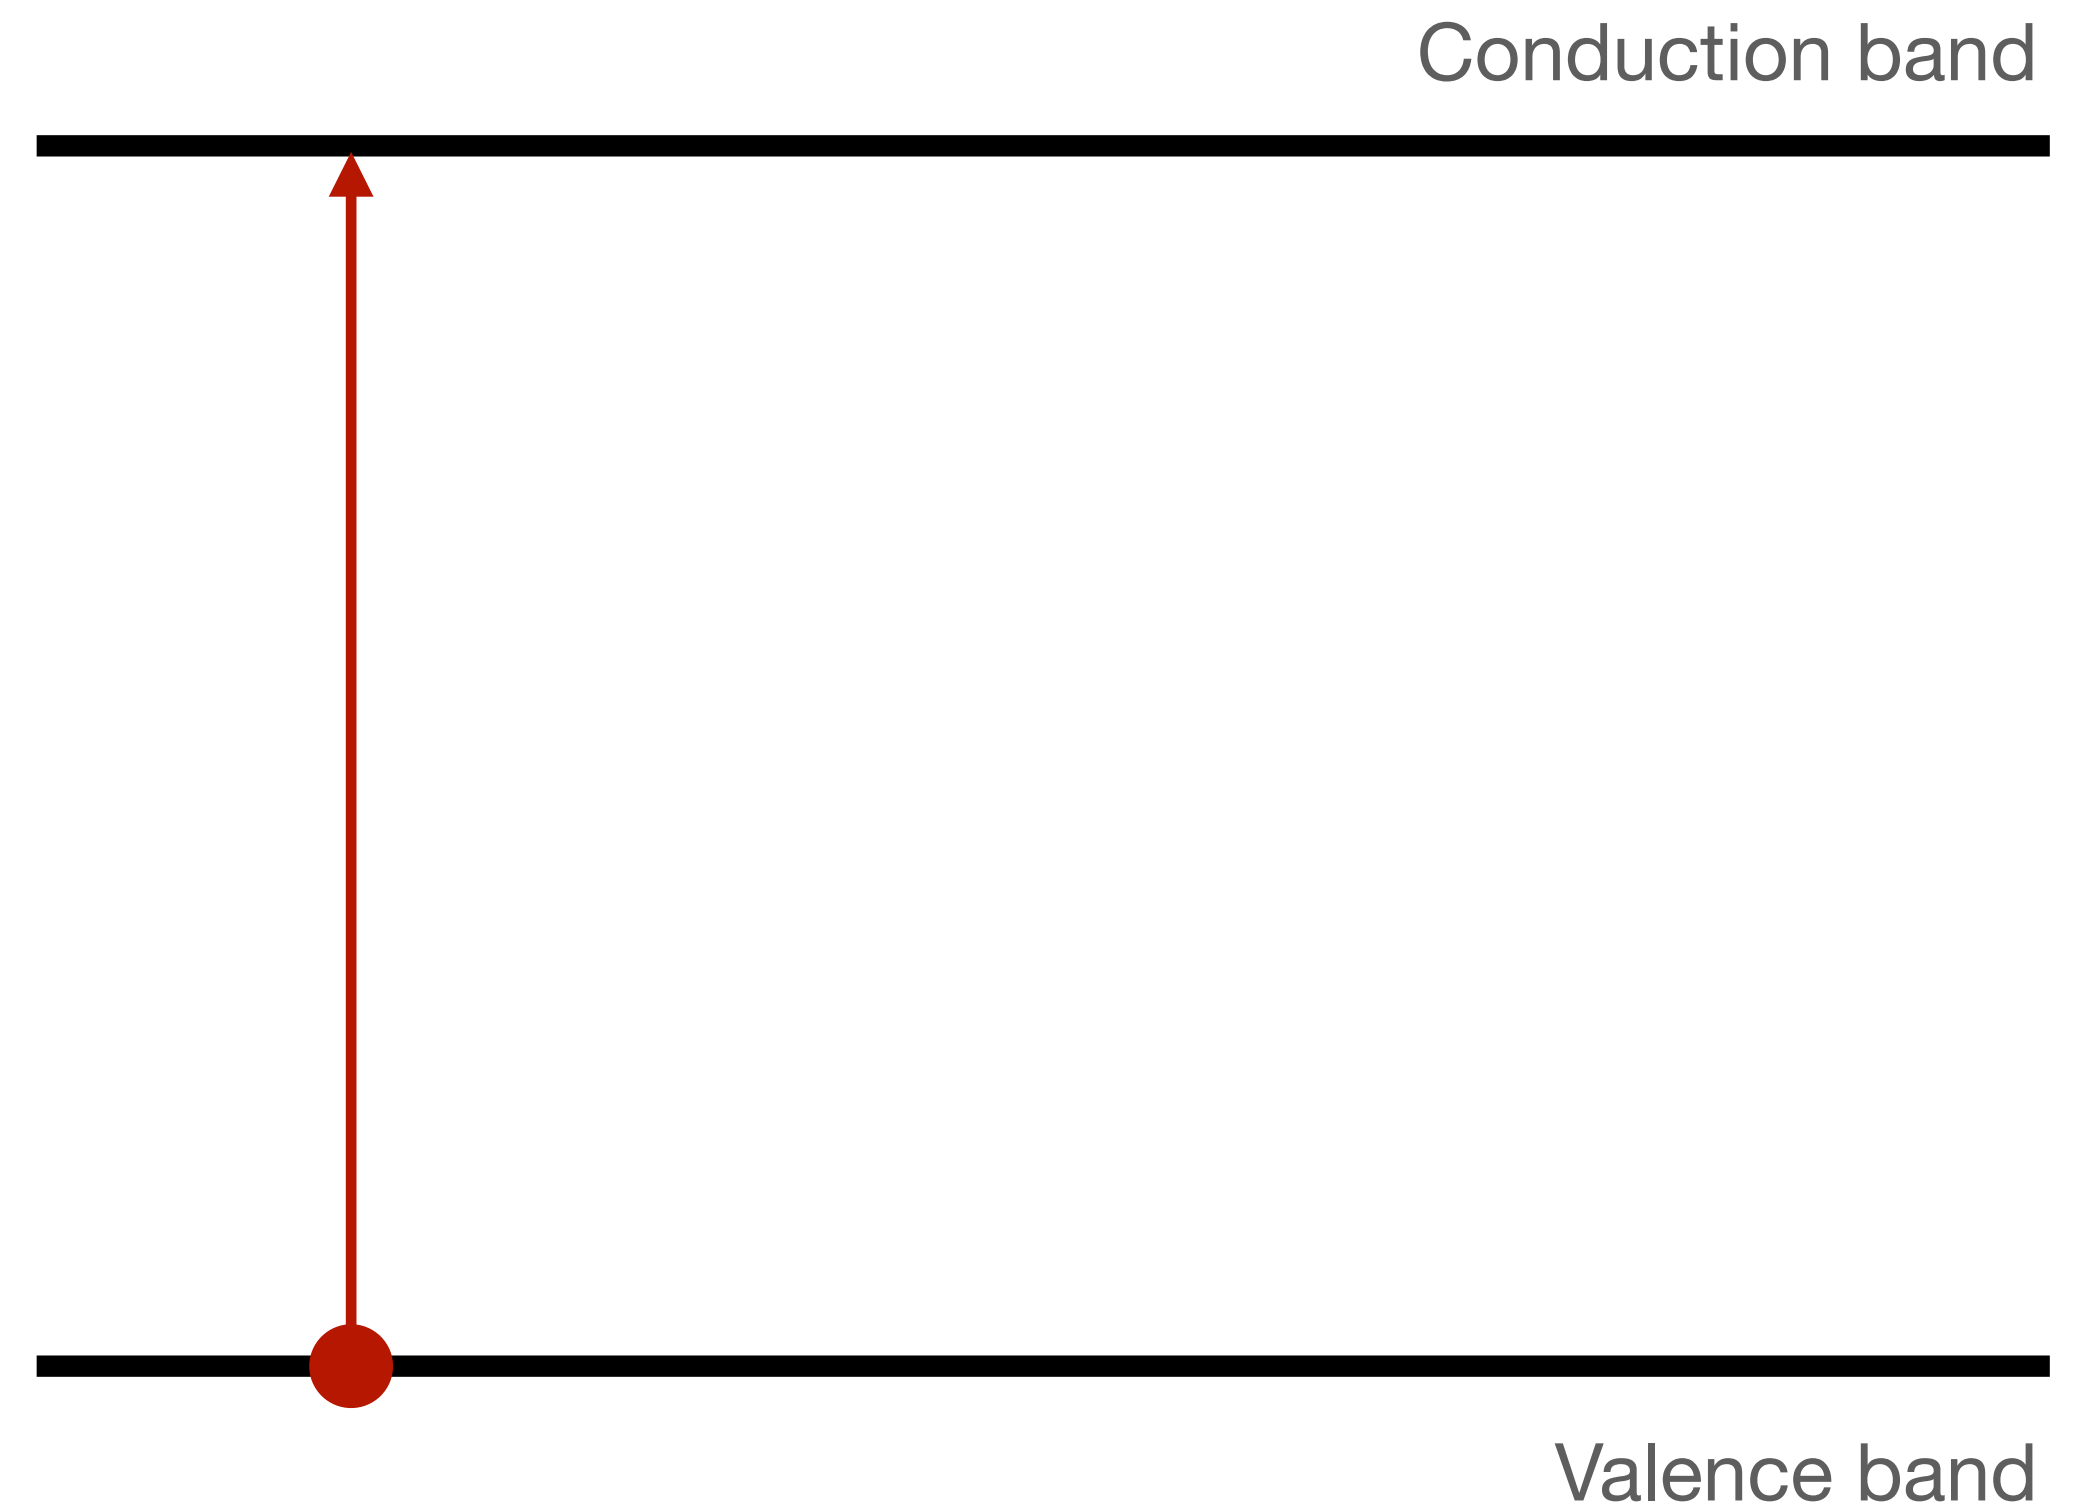


Energy levels in semiconductors

Charge carrier production in semiconductors relates to transitions from the valence to conduction band

- In depleted silicon detectors, this is the mechanism by which interacting particles are observed

Where this goes wrong after irradiation damage is the introduction of additional energy levels in the band gap

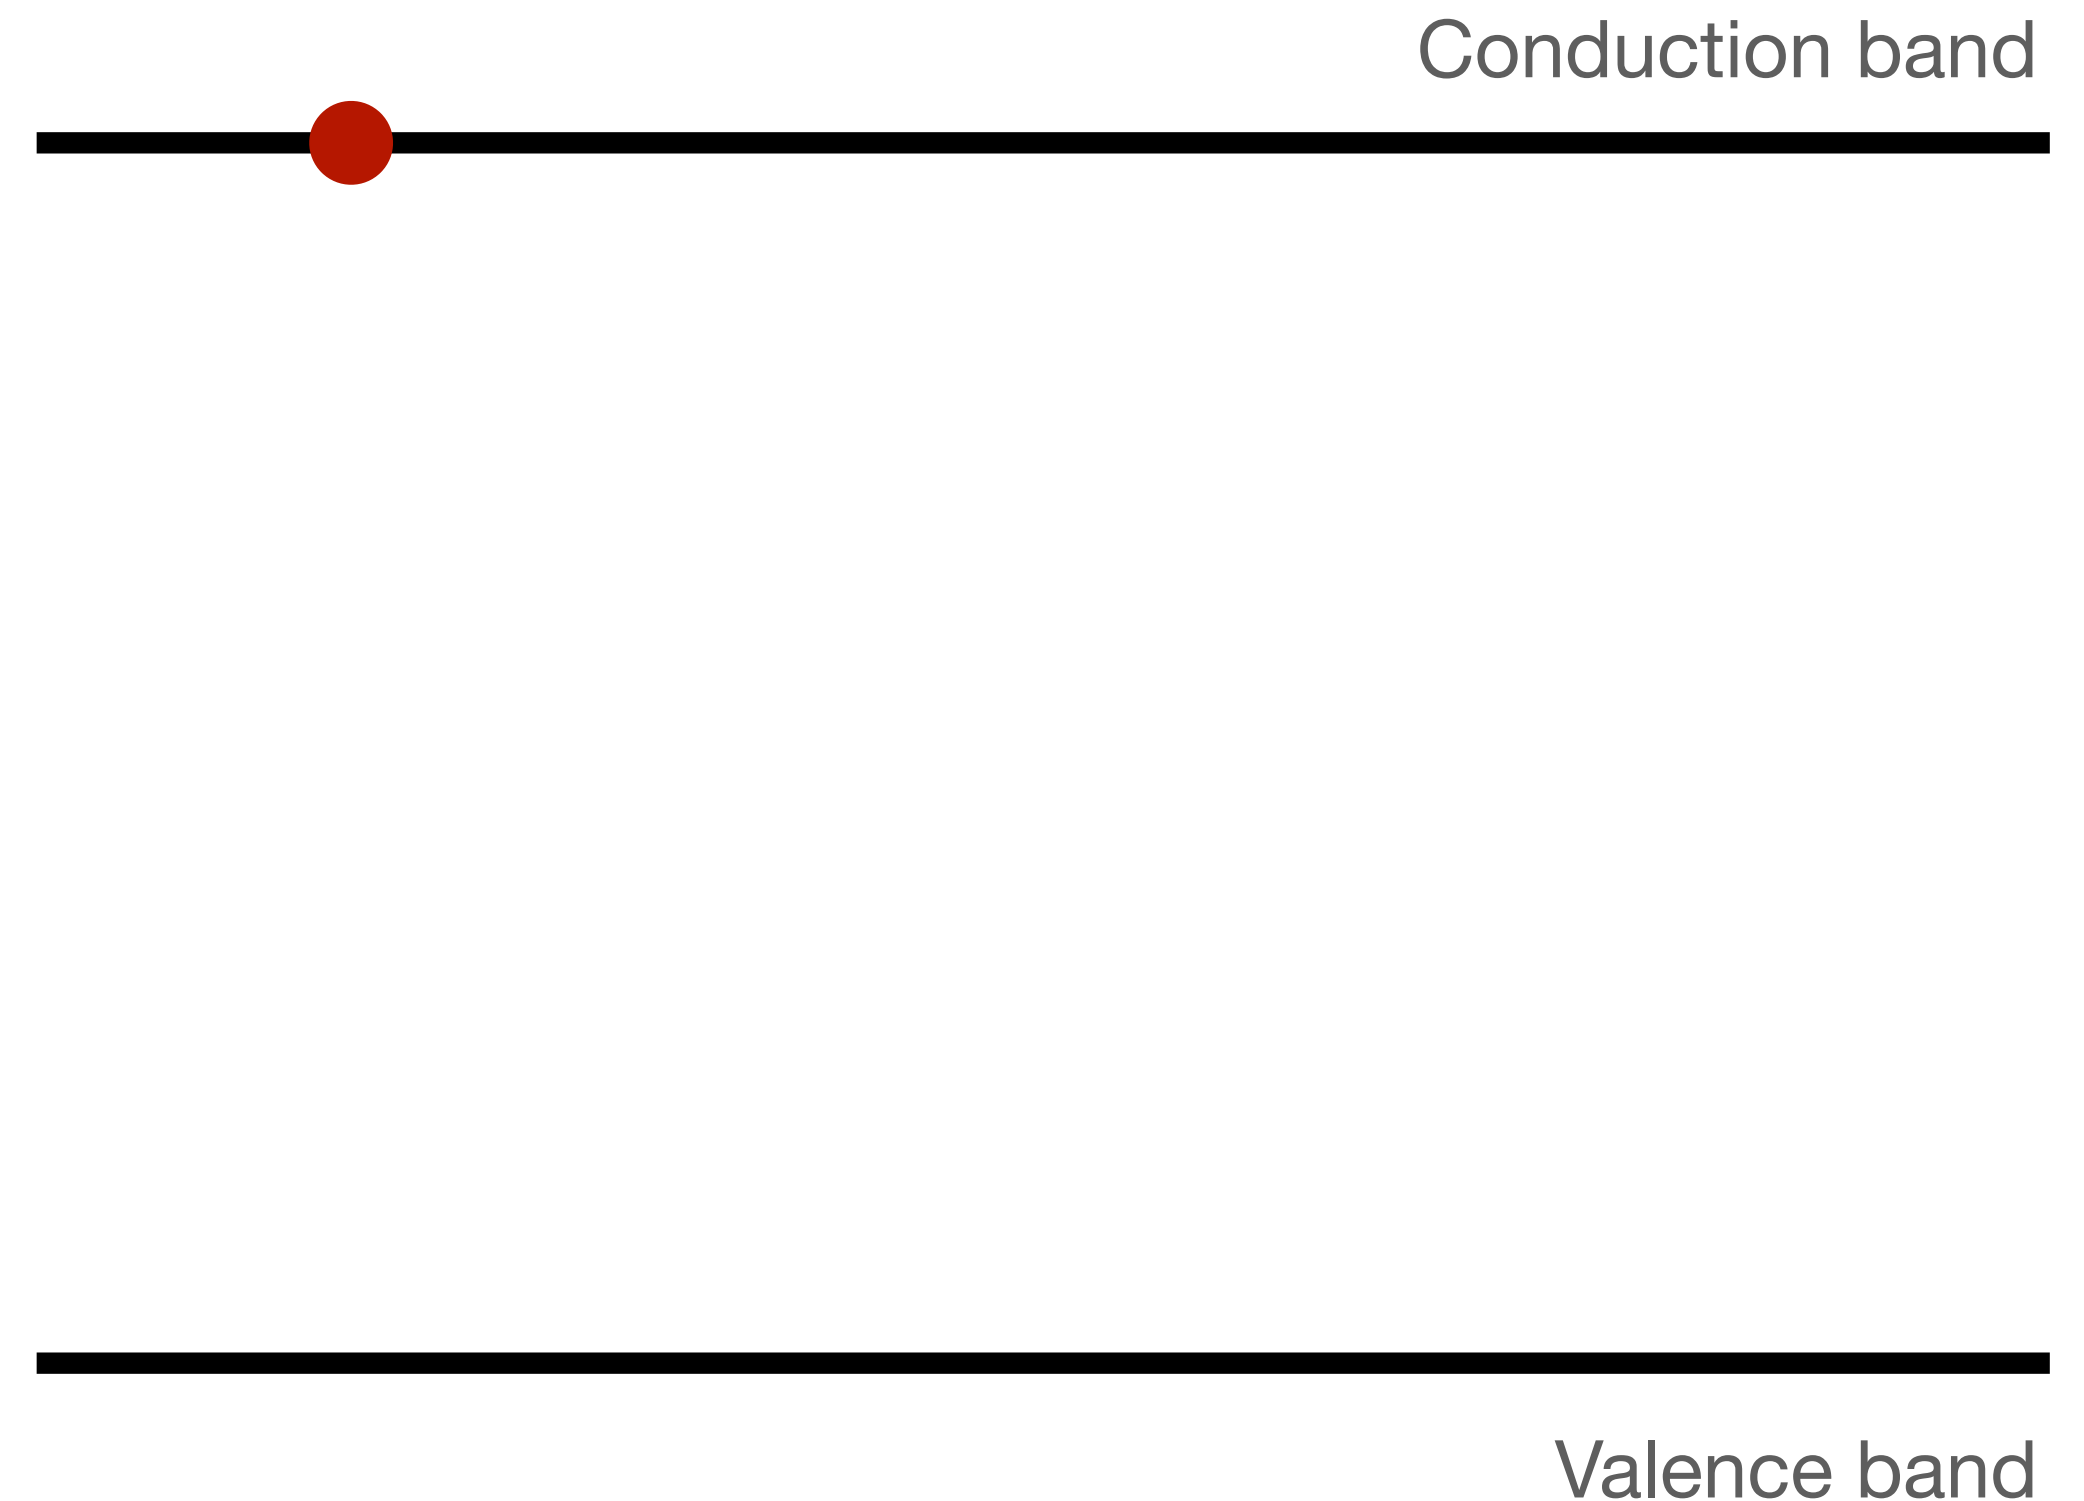


Energy levels in semiconductors

Charge carrier production in semiconductors relates to transitions from the valence to conduction band

- In depleted silicon detectors, this is the mechanism by which interacting particles are observed

Where this goes wrong after irradiation damage is the introduction of additional energy levels in the band gap

- Mid-level defects will capture mobile carriers and reduce the observed signal

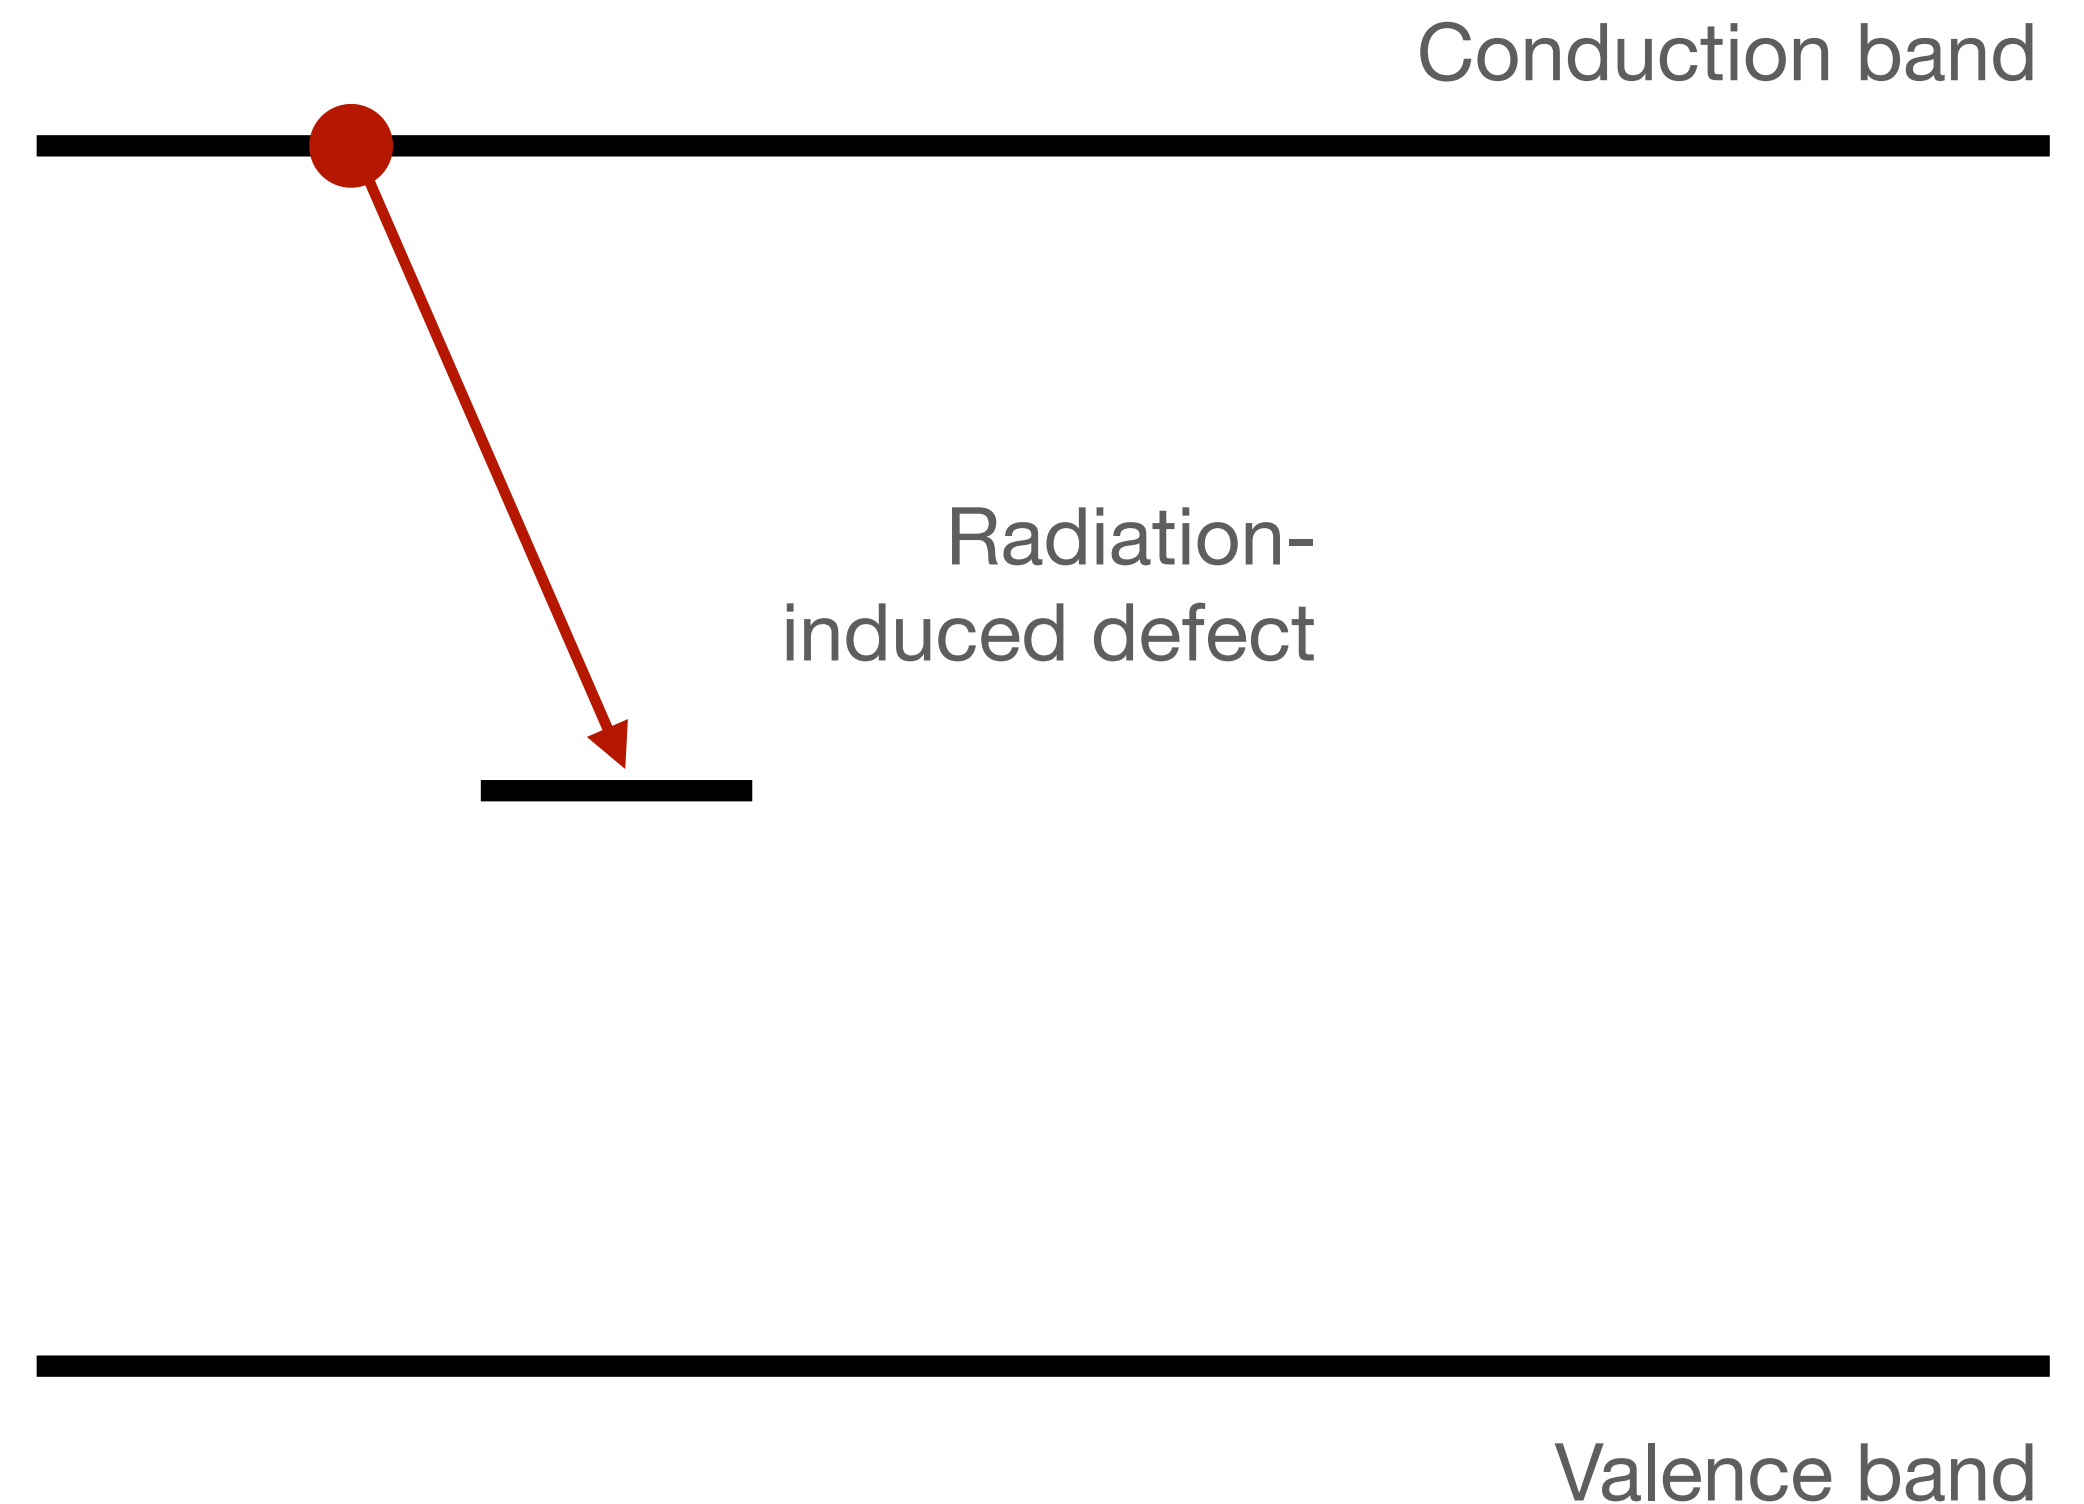


Energy levels in semiconductors

Charge carrier production in semiconductors relates to transitions from the valence to conduction band

- In depleted silicon detectors, this is the mechanism by which interacting particles are observed

Where this goes wrong after irradiation damage is the introduction of additional energy levels in the band gap

- They also act as a route for thermally generated pairs => increased leakage current

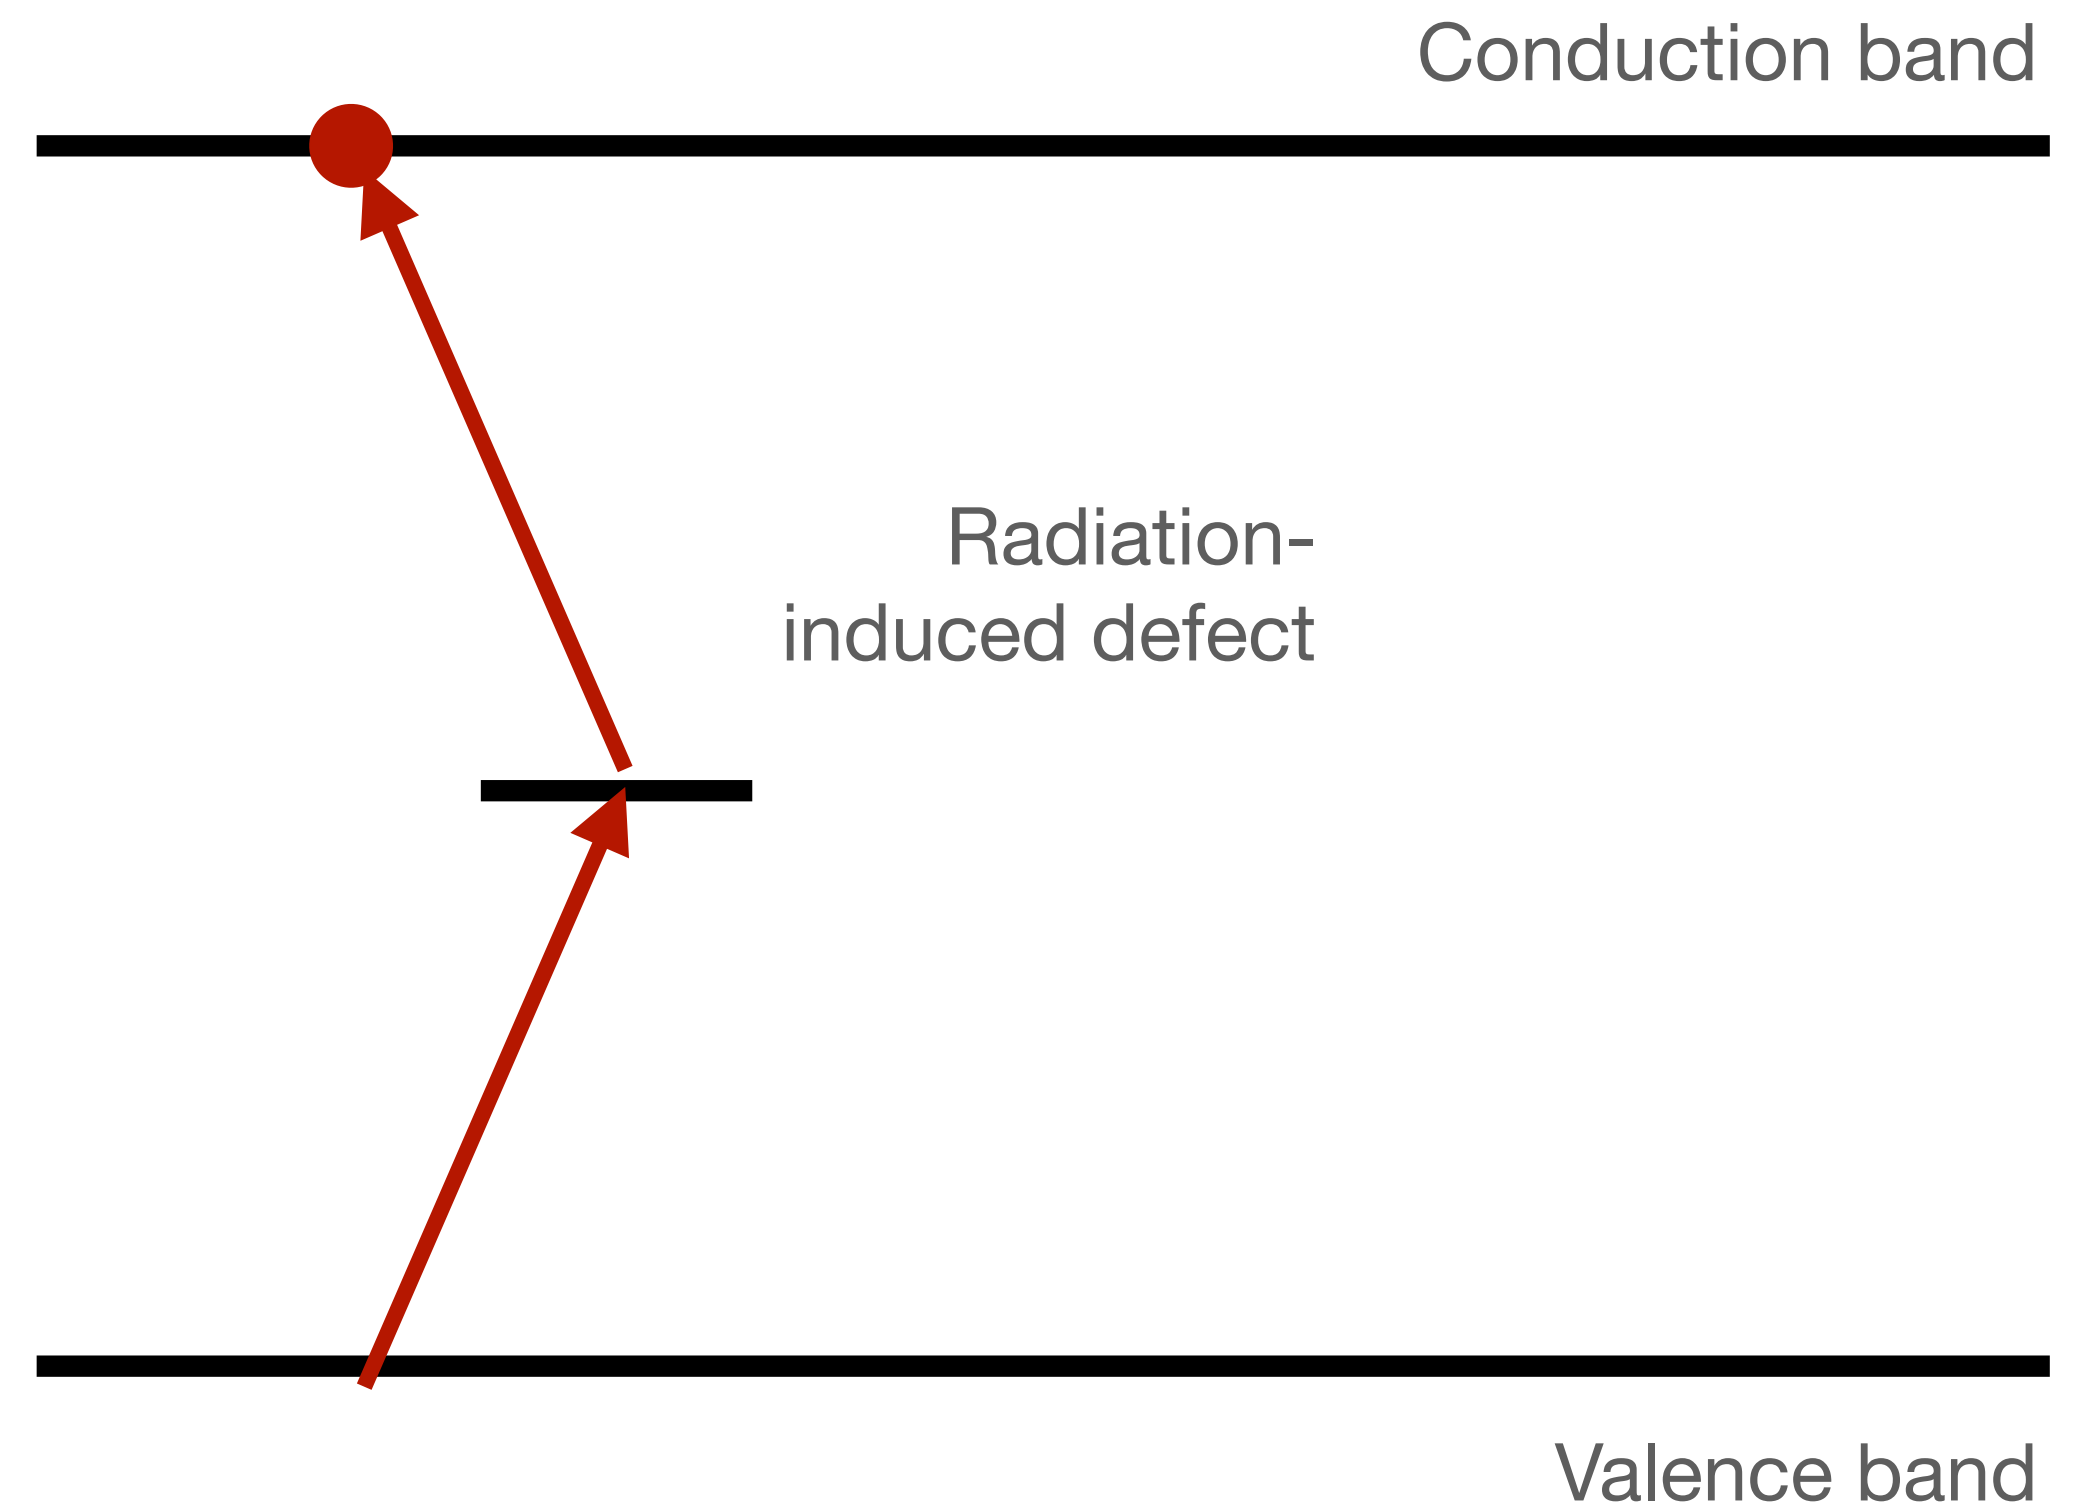


Energy levels in semiconductors

Charge carrier production in semiconductors relates to transitions from the valence to conduction band

- In depleted silicon detectors, this is the mechanism by which interacting particles are observed

Where this goes wrong after irradiation damage is the introduction of additional energy levels in the band gap

- Bands close to the conduction or valence band can give rise to space charge build-up

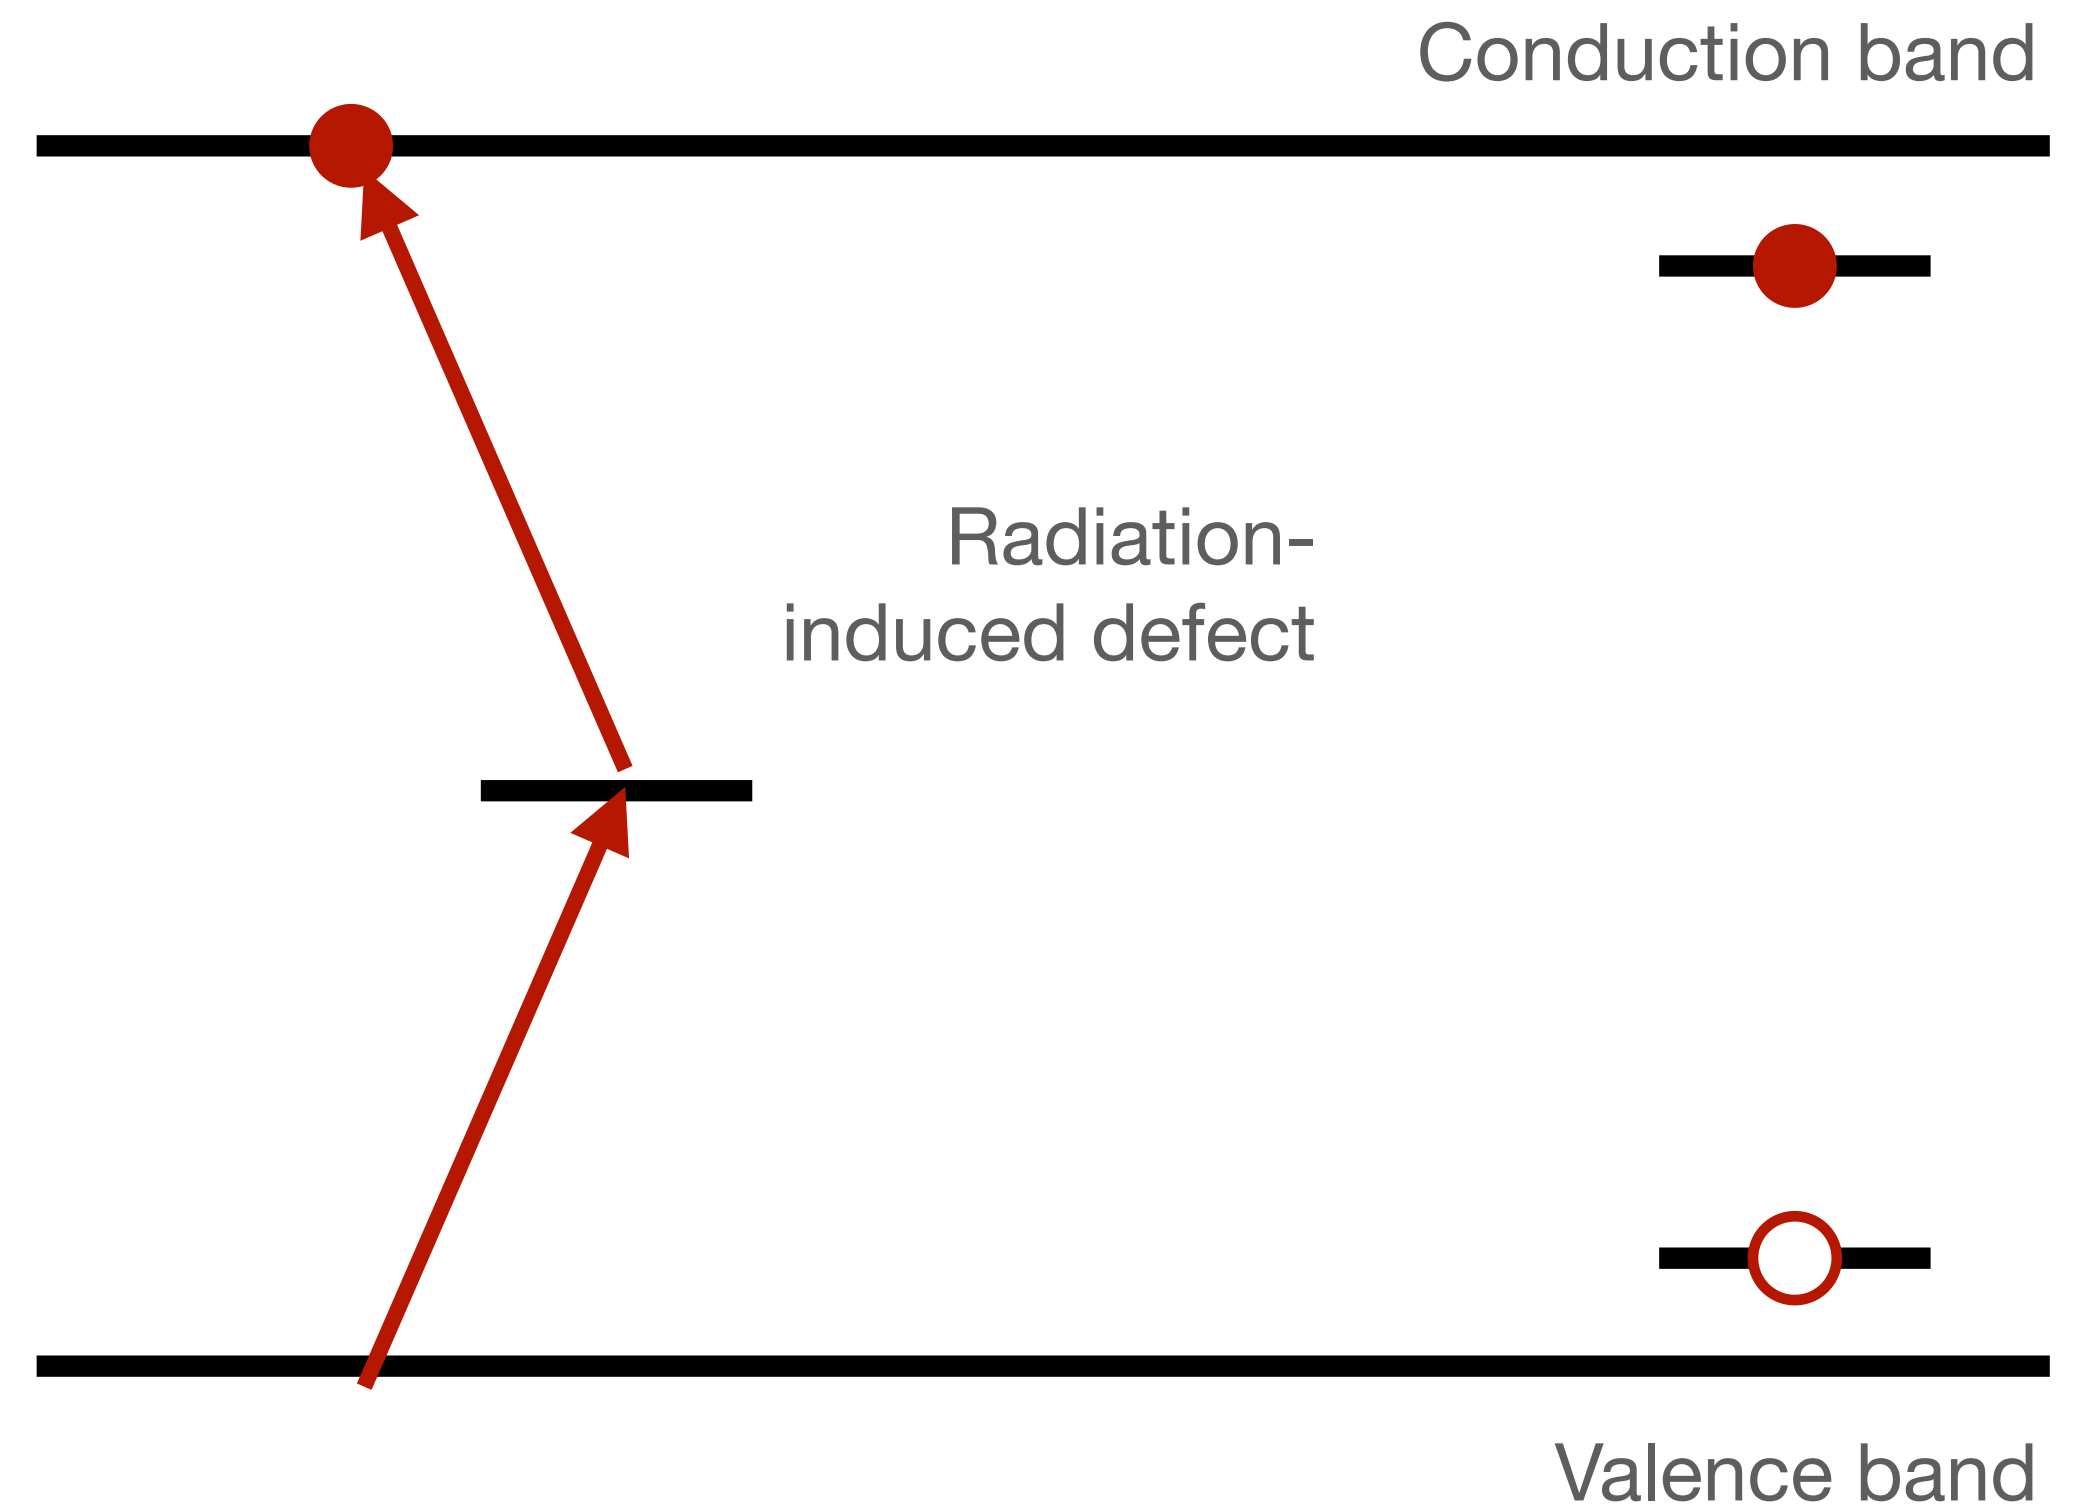


Energy levels in semiconductors

Charge carrier production in semiconductors relates to transitions from the valence to conduction band

- In depleted silicon detectors, this is the mechanism by which interacting particles are observed

Where this goes wrong after irradiation damage is the introduction of additional energy levels in the band gap

- Bands close to the conduction or valence band can give rise to space charge build-up

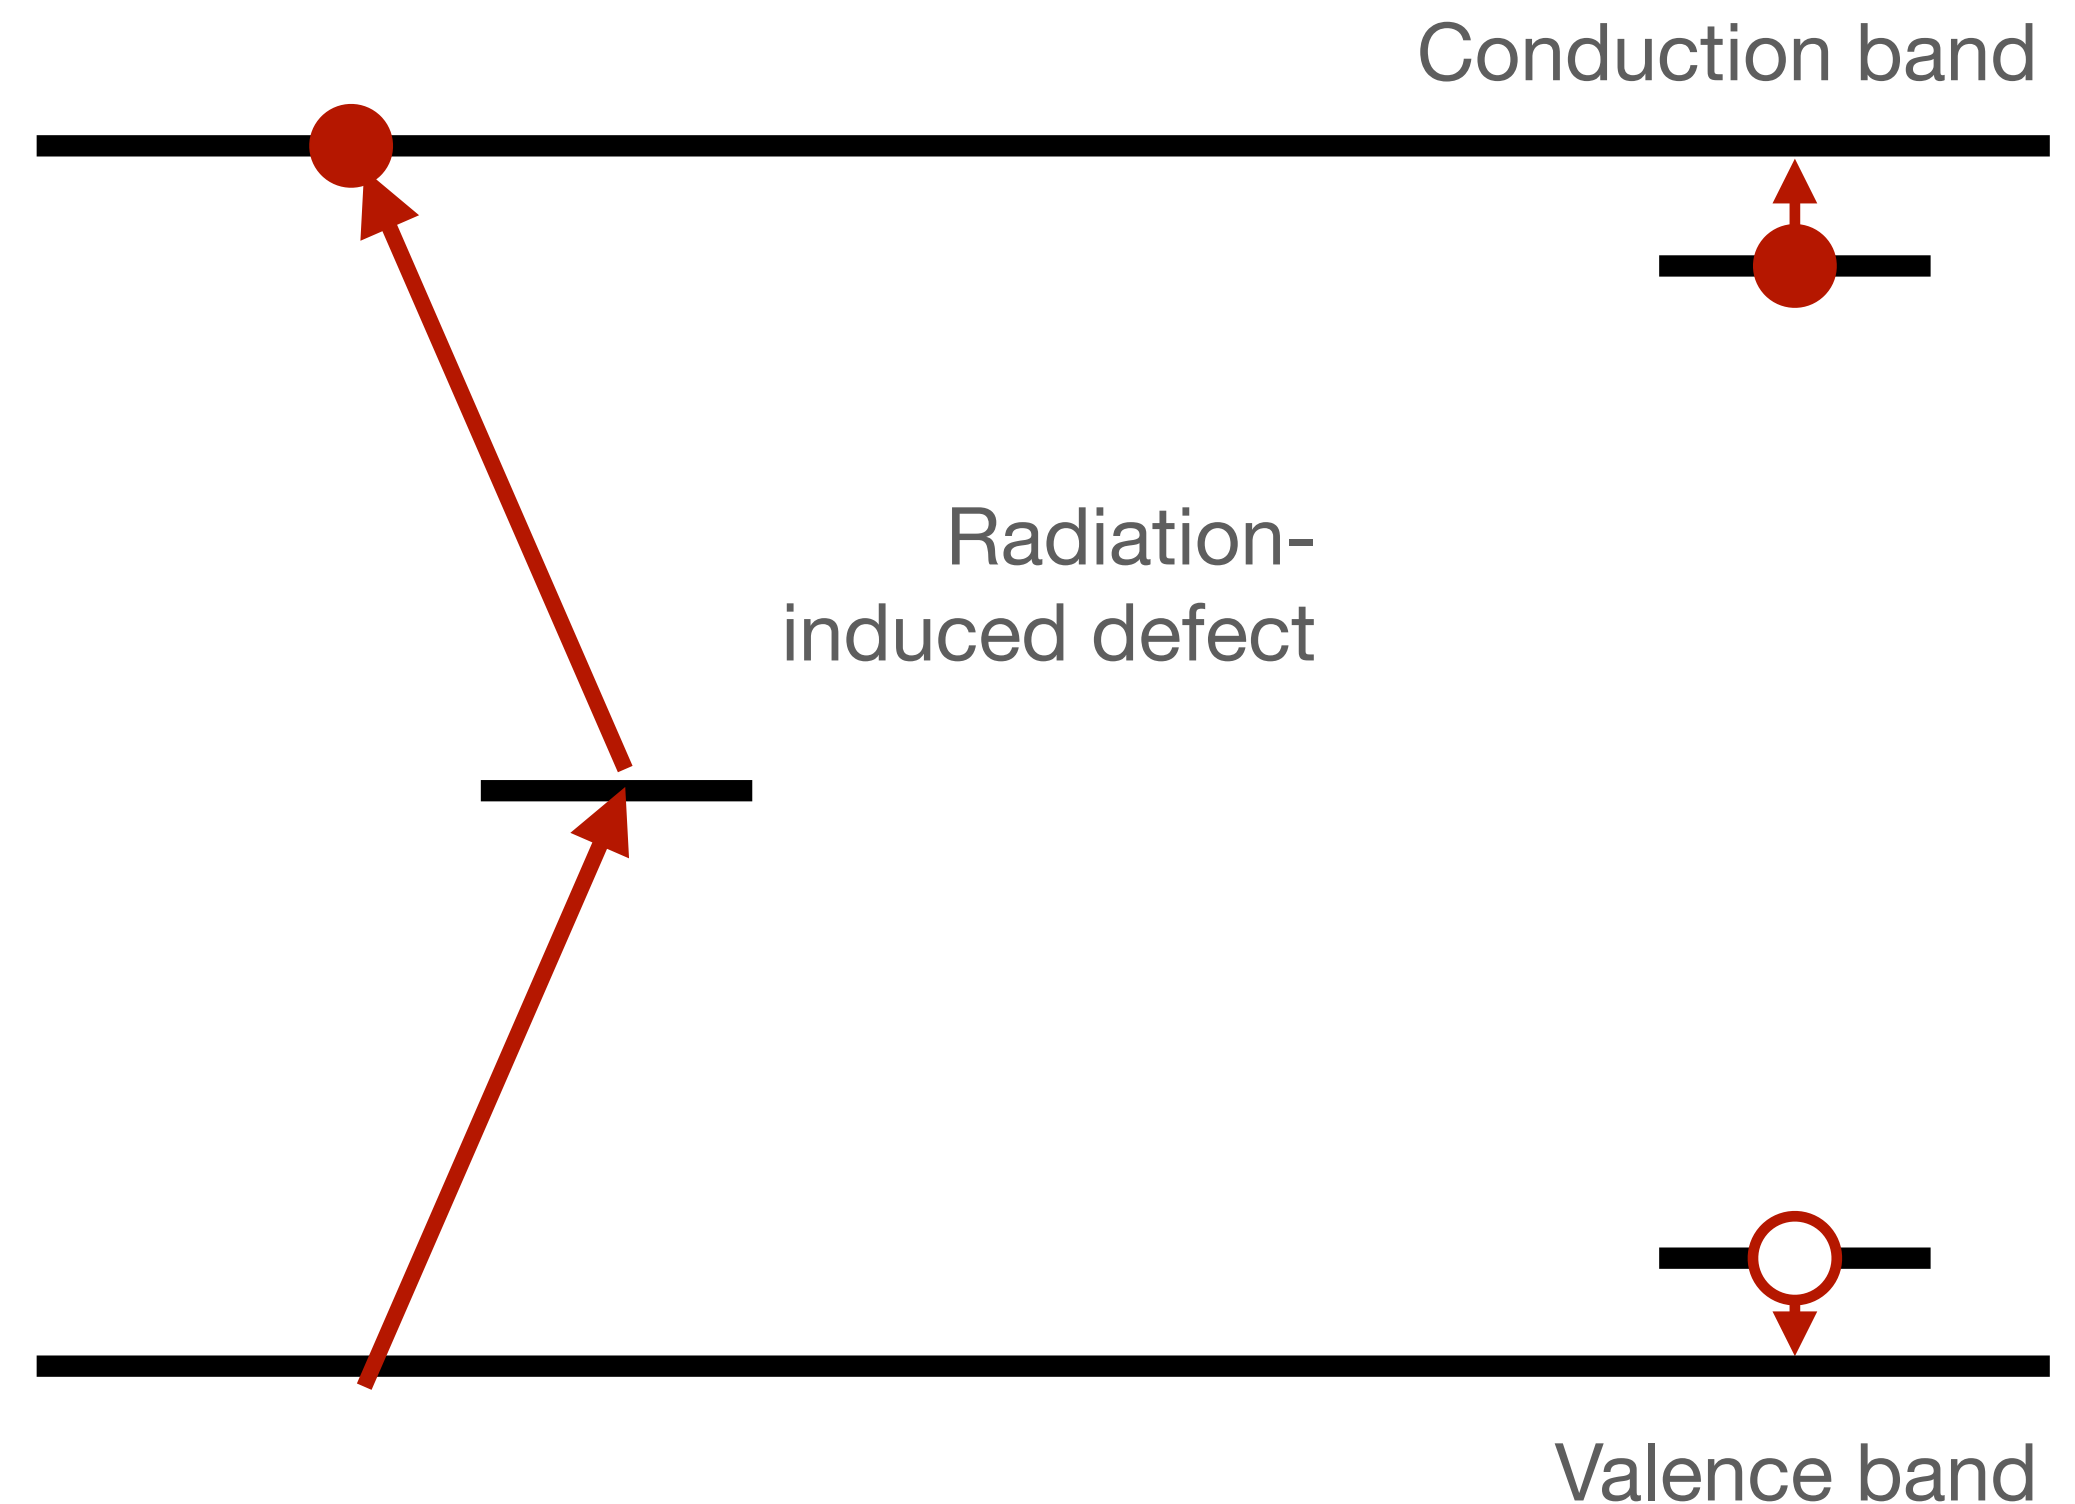


Energy levels in semiconductors

Charge carrier production in semiconductors relates to transitions from the valence to conduction band

- In depleted silicon detectors, this is the mechanism by which interacting particles are observed


Where this goes wrong after irradiation damage is the introduction of additional energy levels in the band gap

- Bands close to the conduction or valence band can give rise to space charge build-up

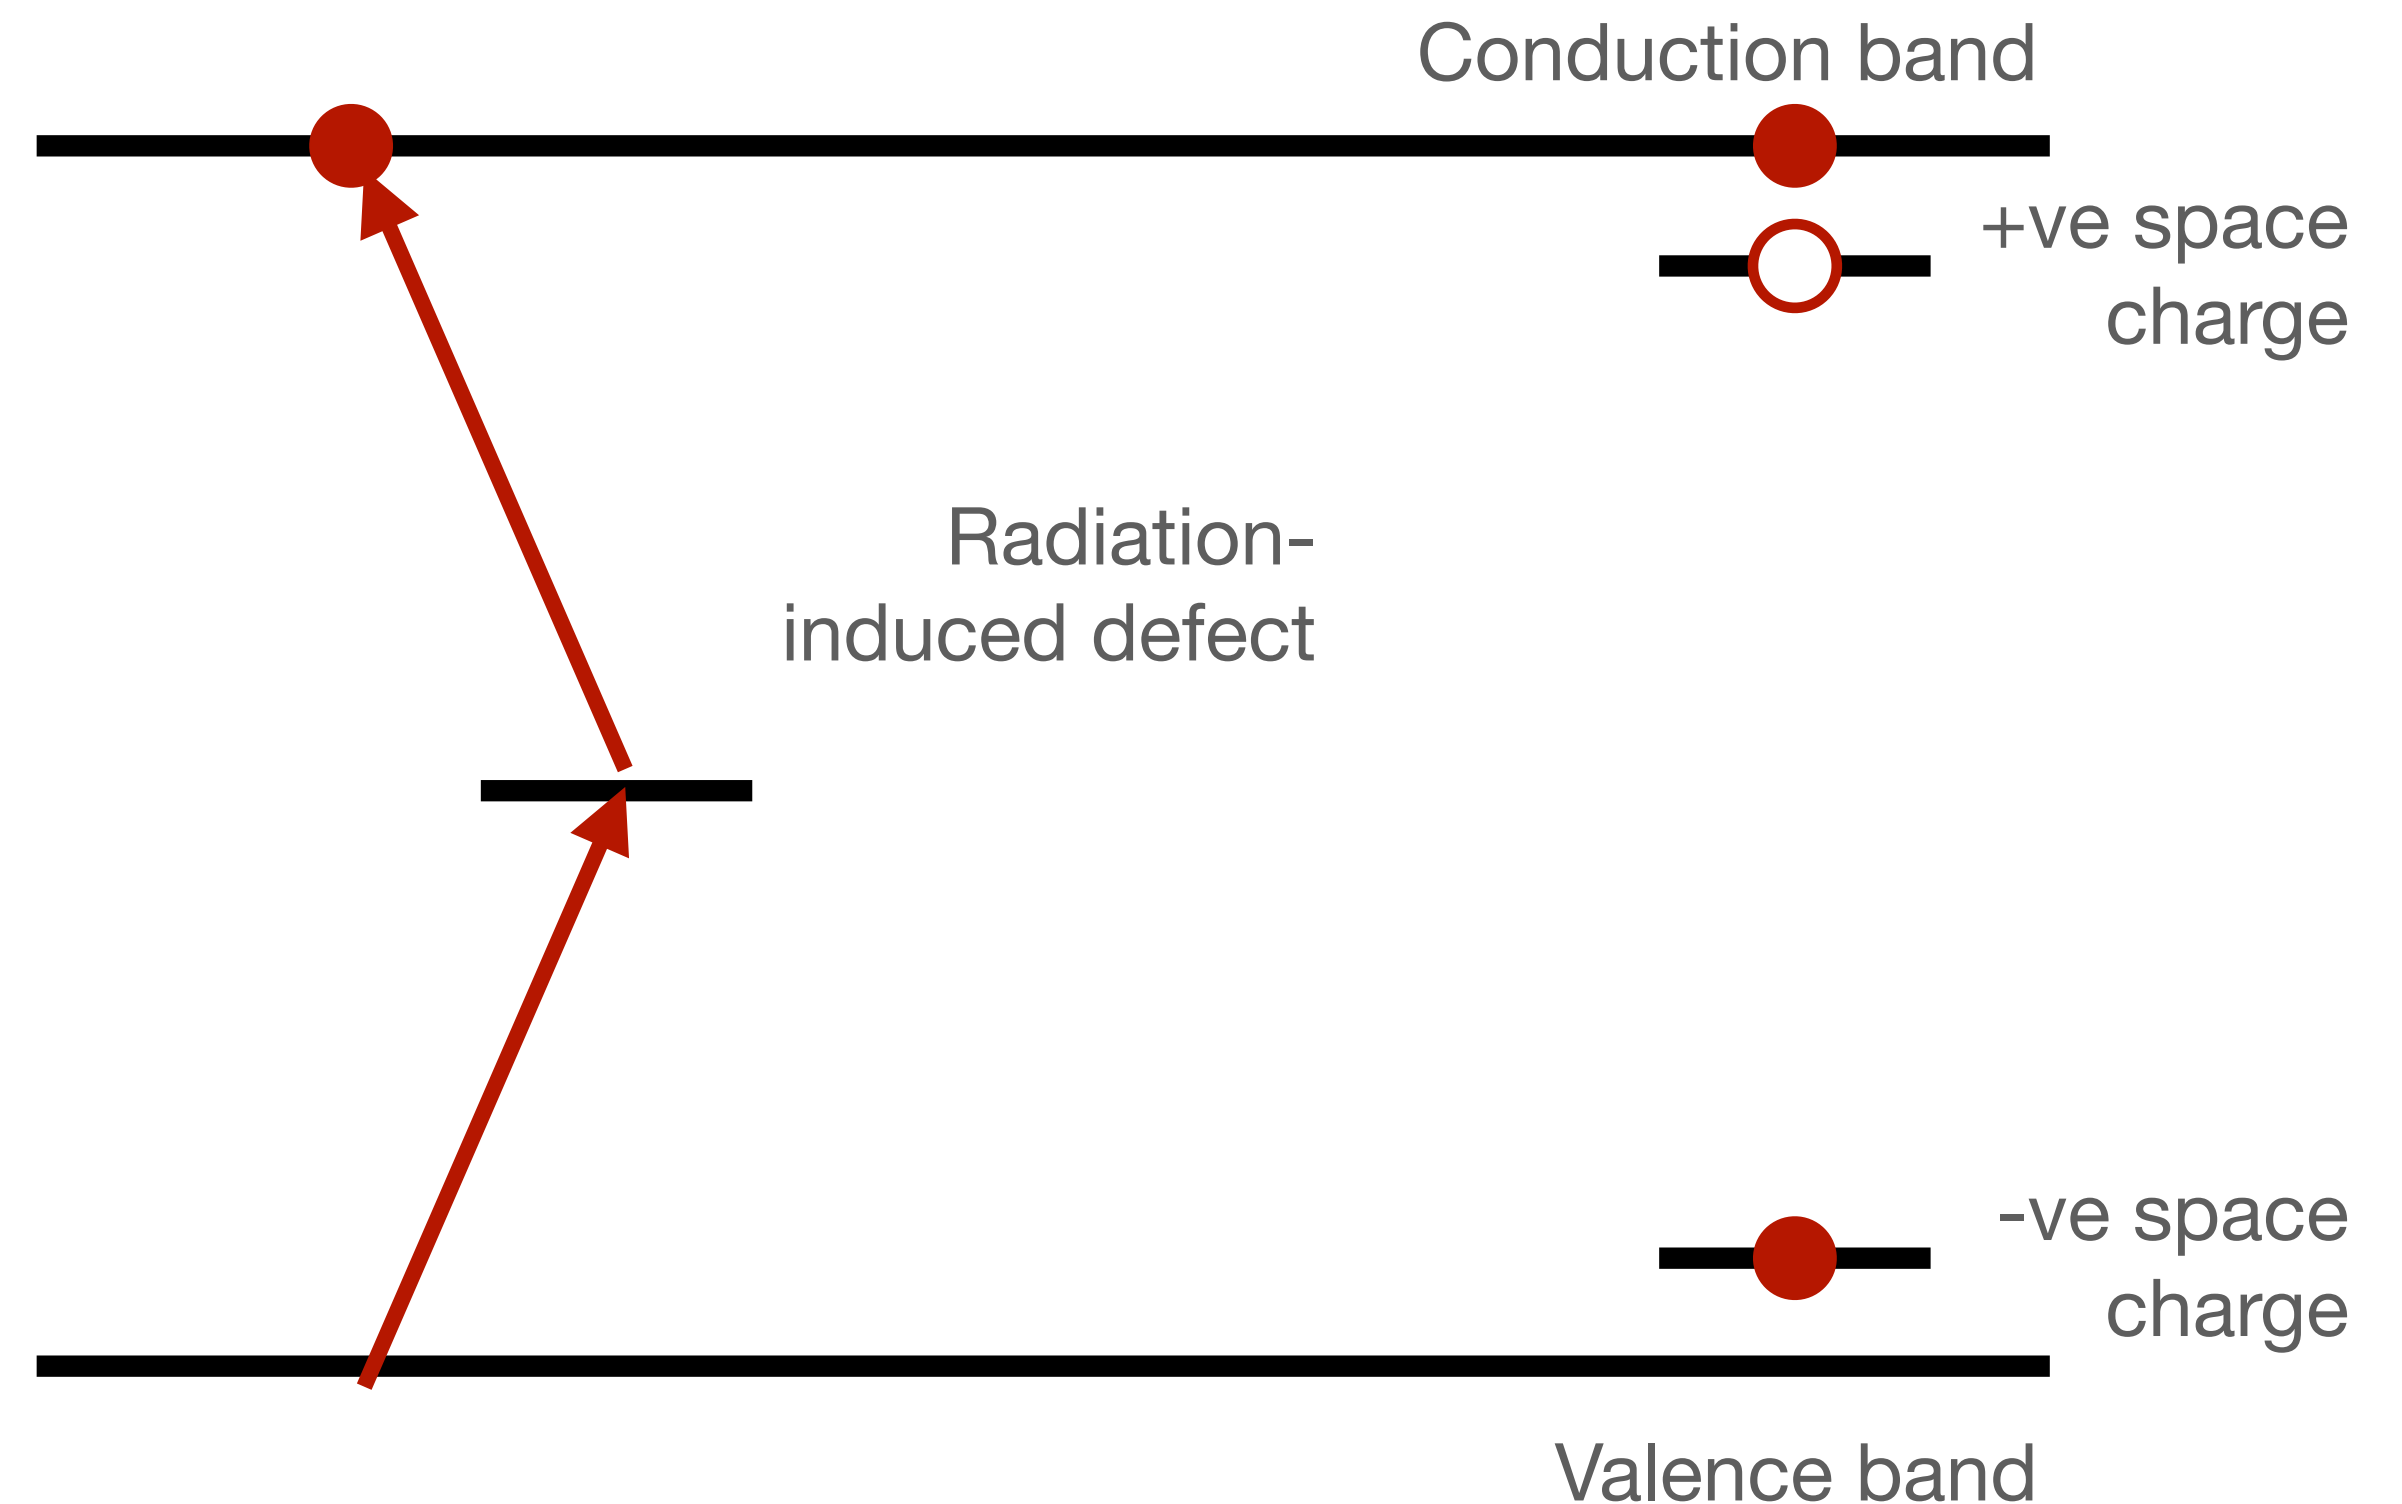


Energy levels in semiconductors

The question is, how do we study the various defects and understand what they are, where they come from, and how to mitigate their effects?

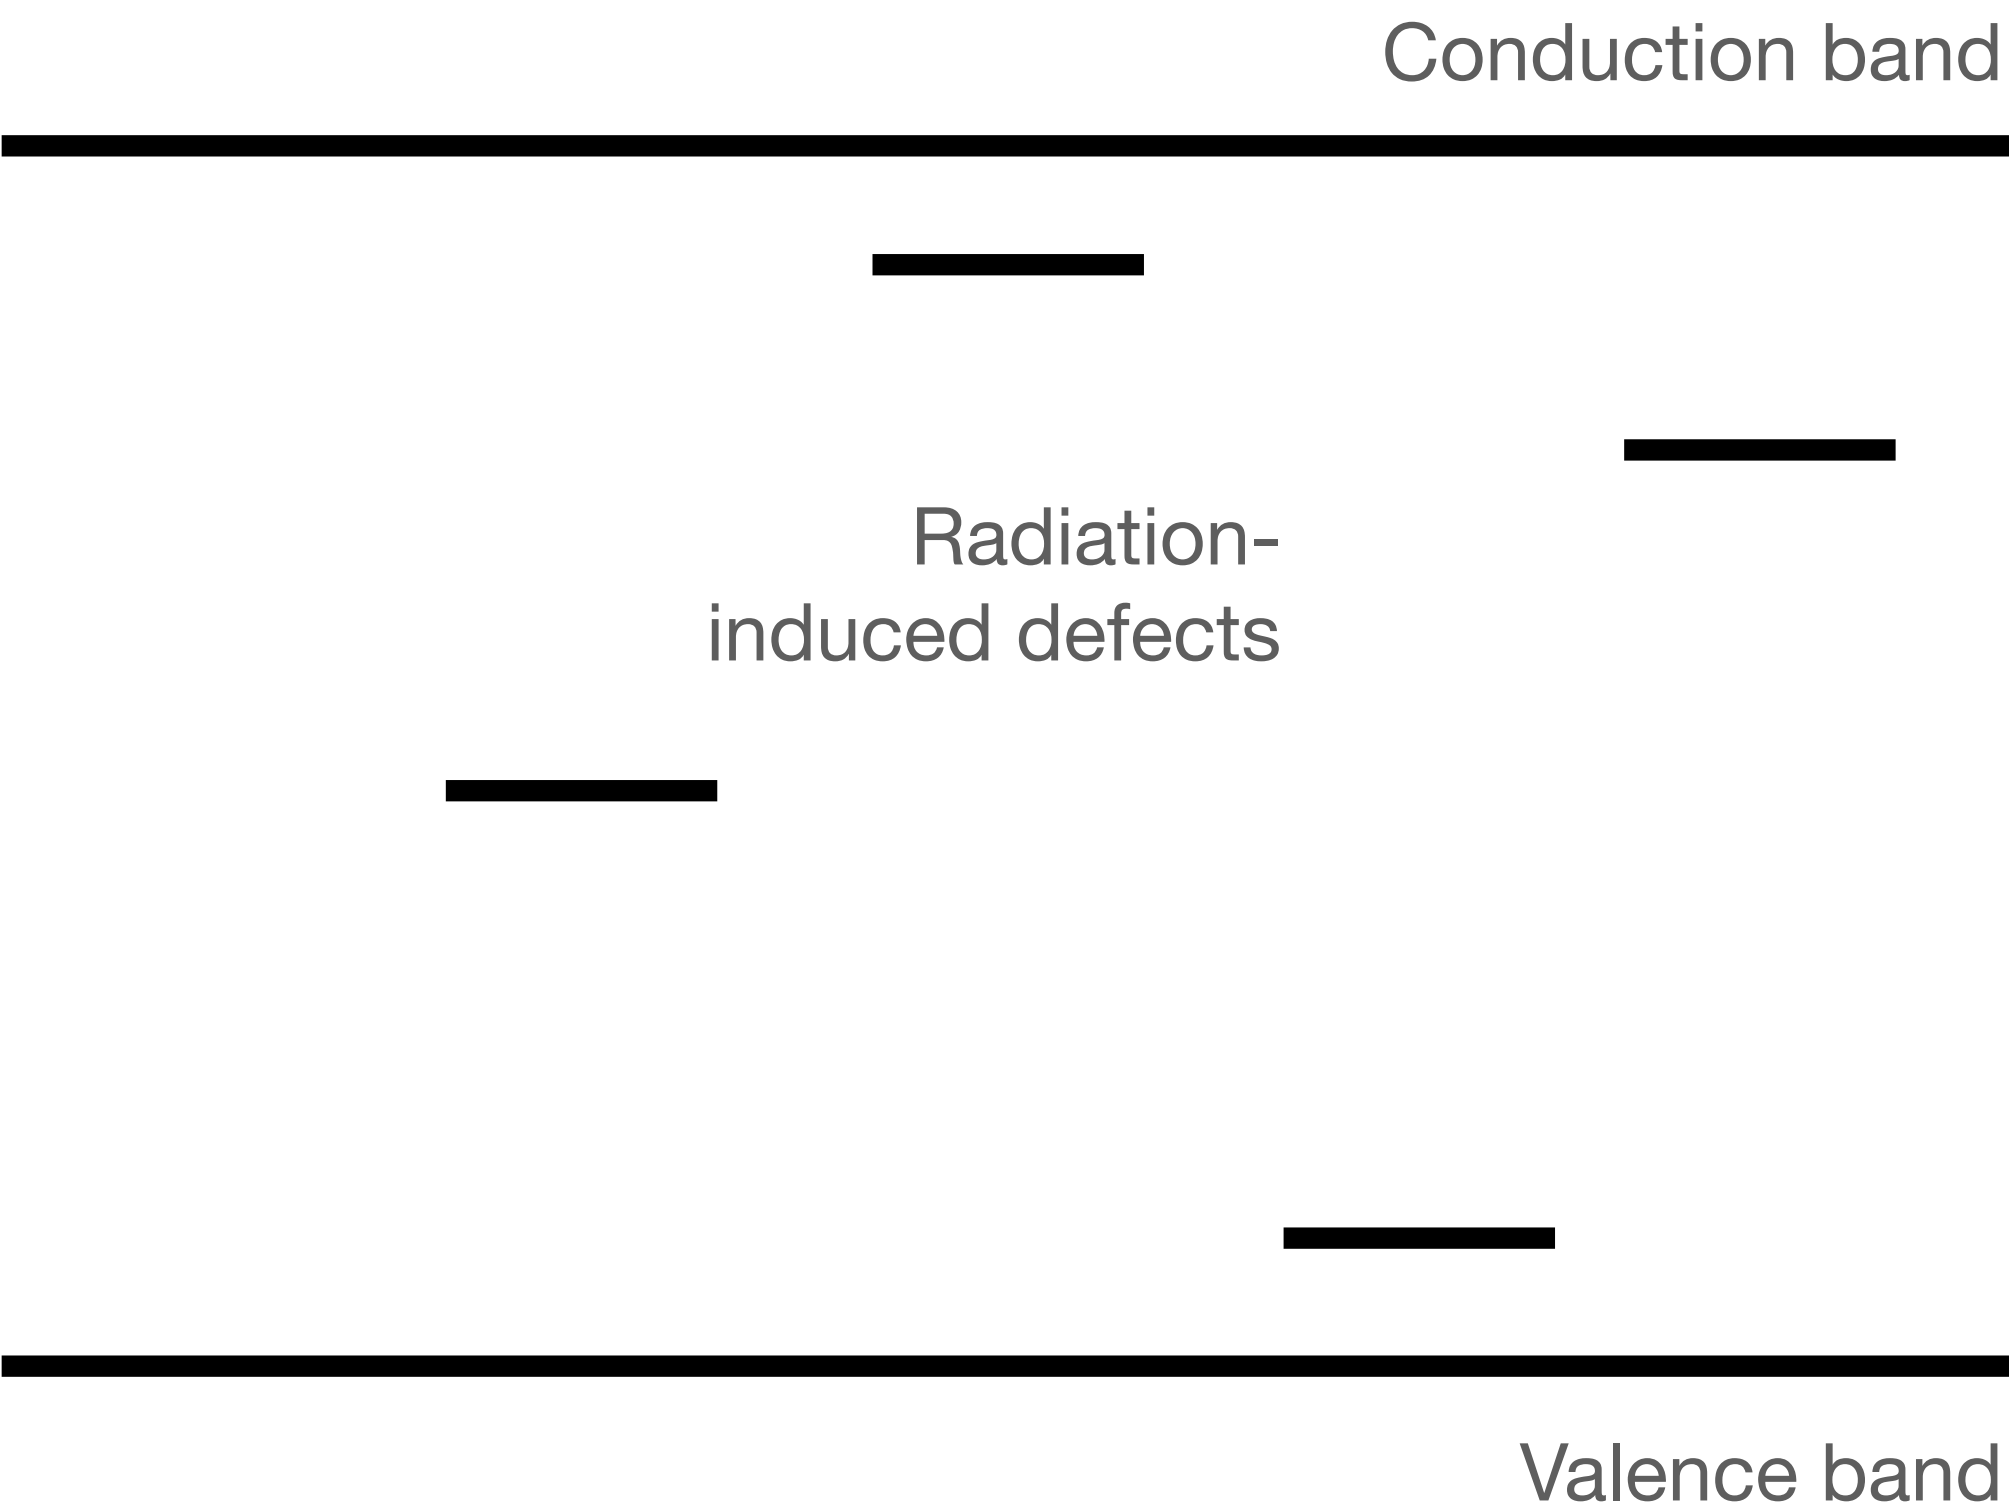

Energy levels in semiconductors

NB: these are very simplified models of what we are actually looking at...

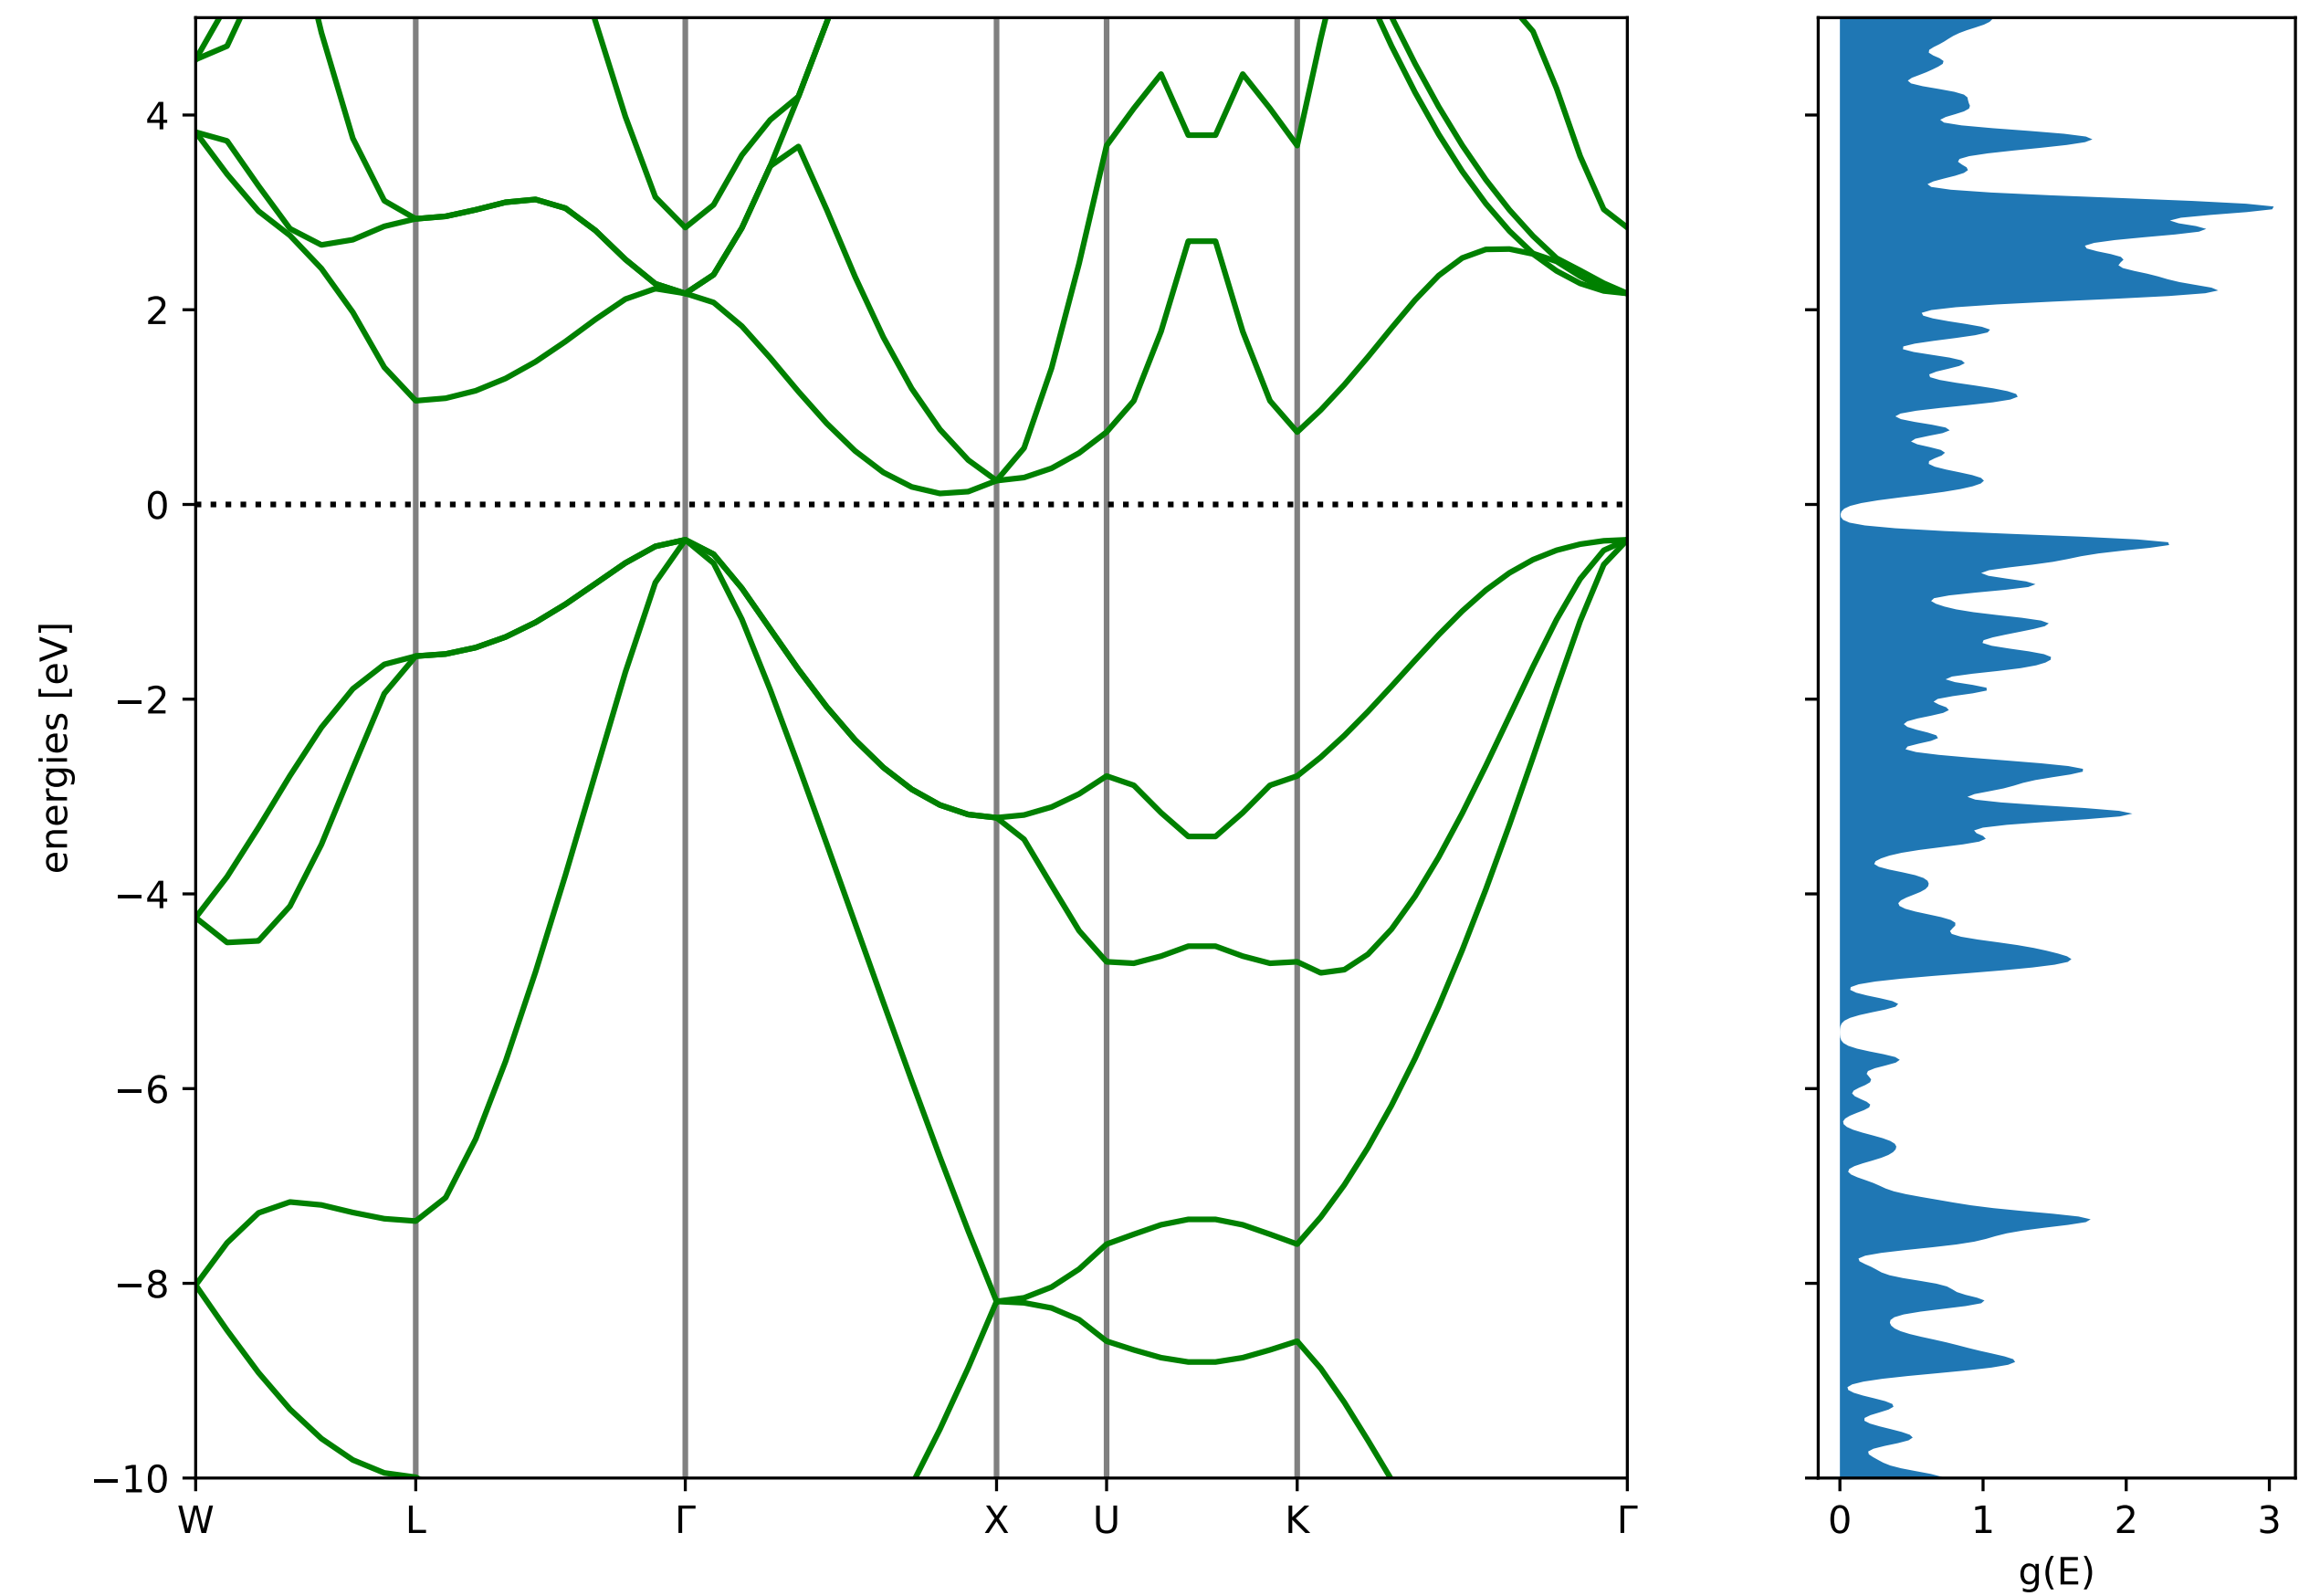


TSC - signal generation

We will start with the easier concept first - **Thermally**

Stimulated Current (TSC)

- This technique is quite straightforward:
 - Cool down your silicon detector (let's say 10 K)

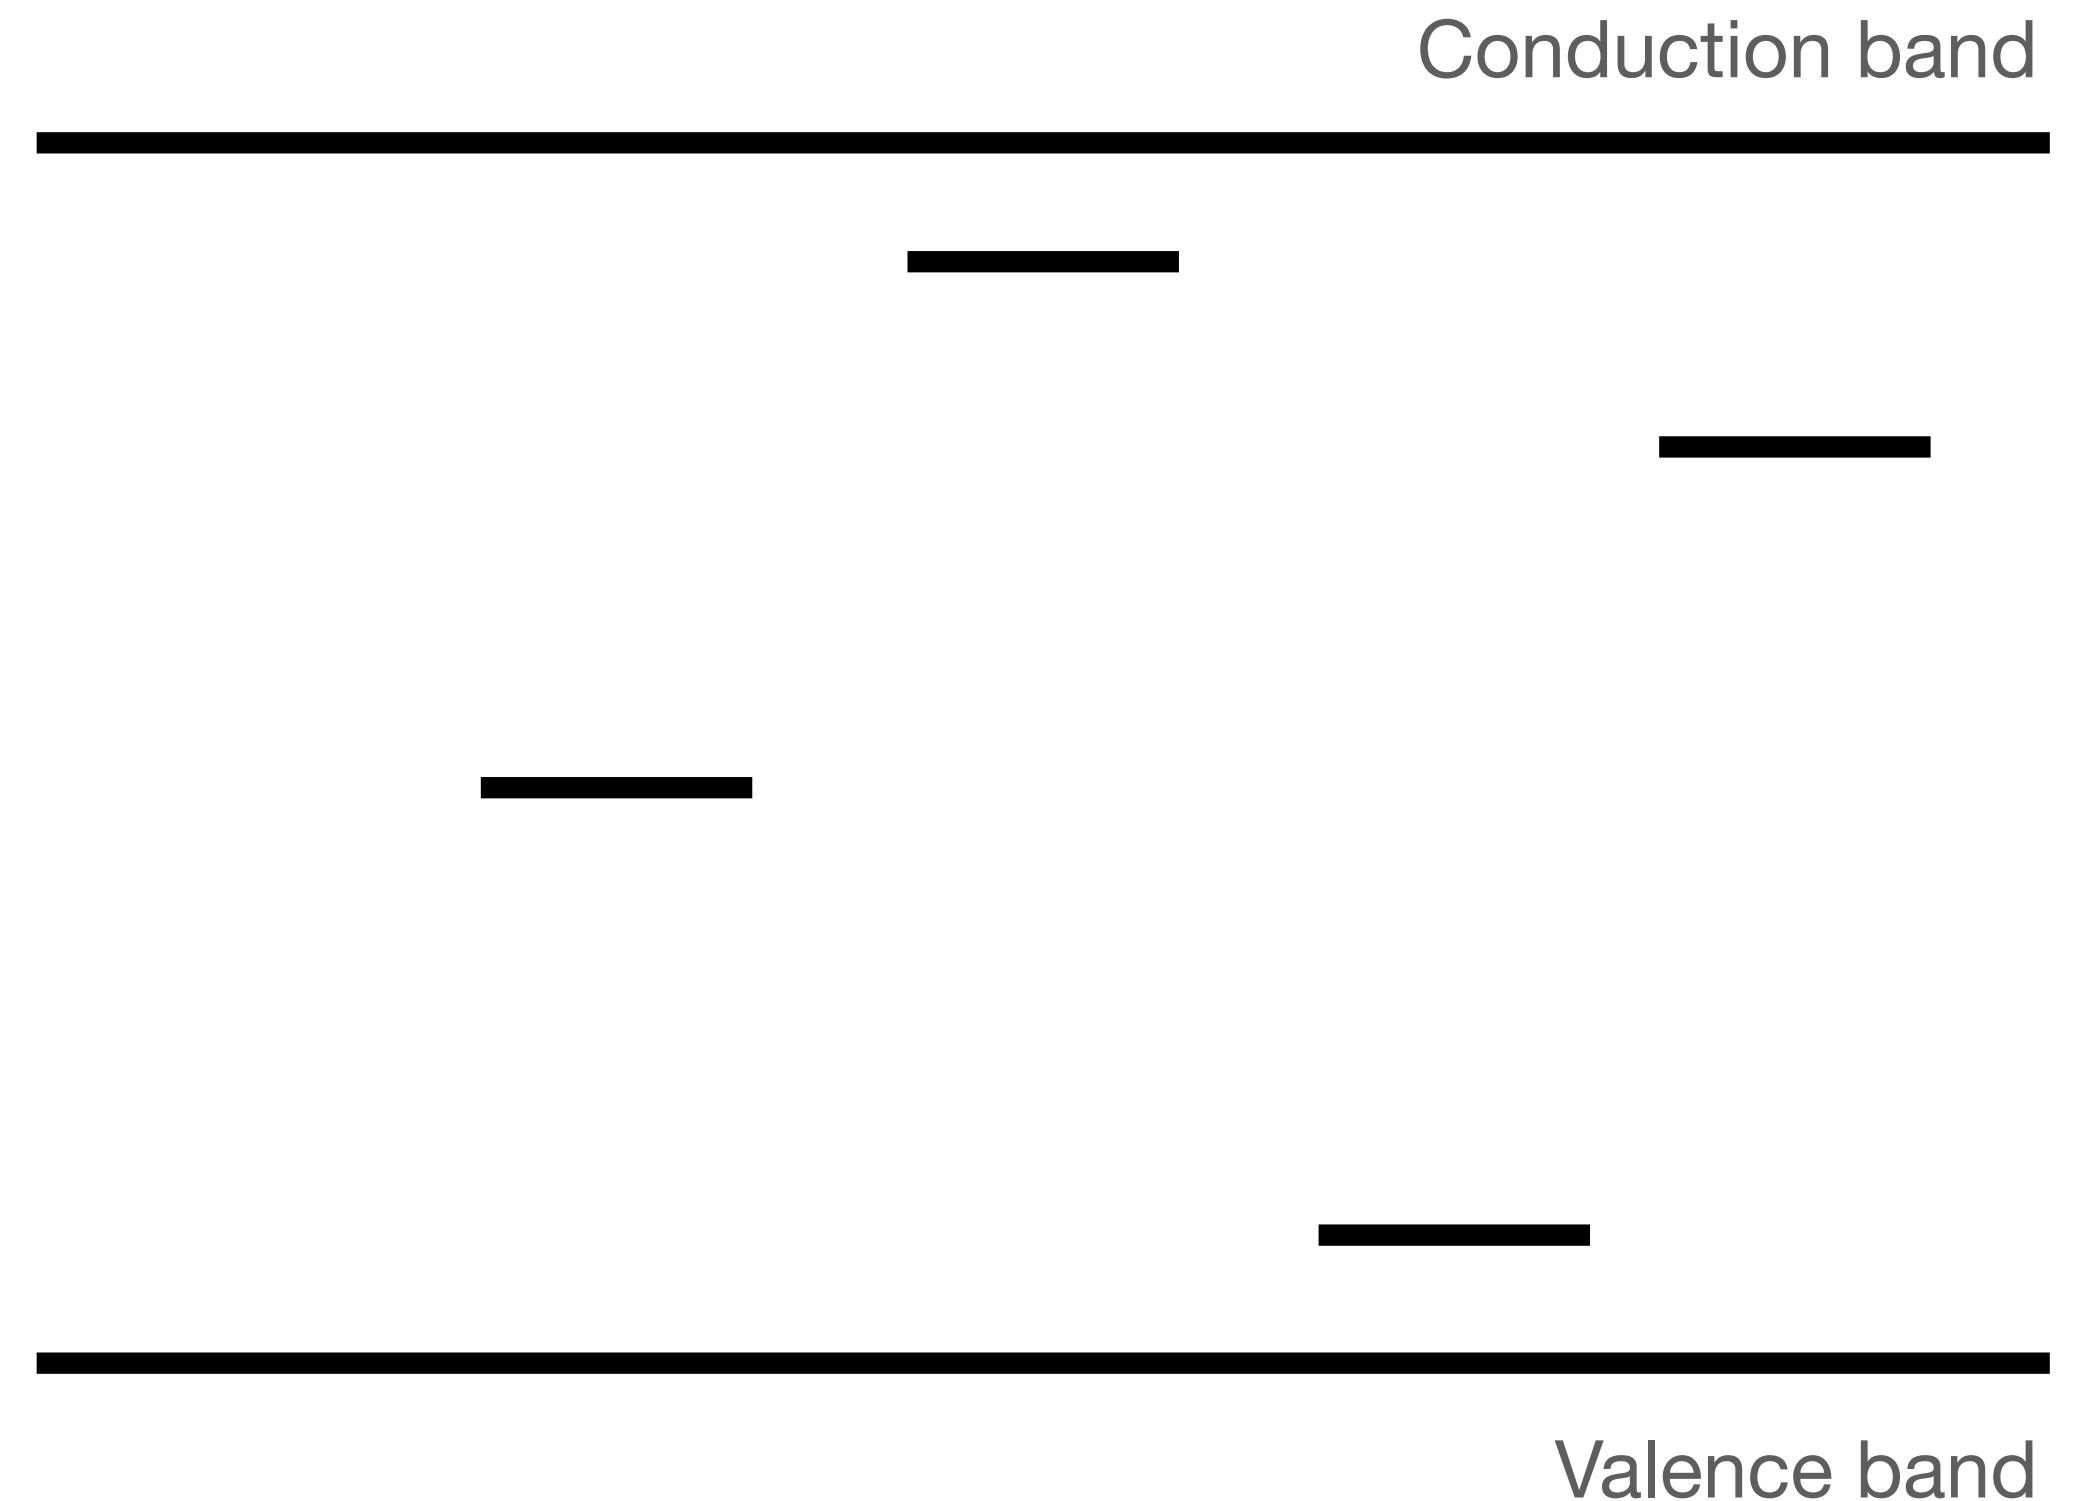


TSC - signal generation

We will start with the easier concept first - **Thermally**

Stimulated Current (TSC)

- This technique is quite straightforward:
 - Cool down your silicon detector (let's say 10 K)
 - Fill the traps with charge carriers

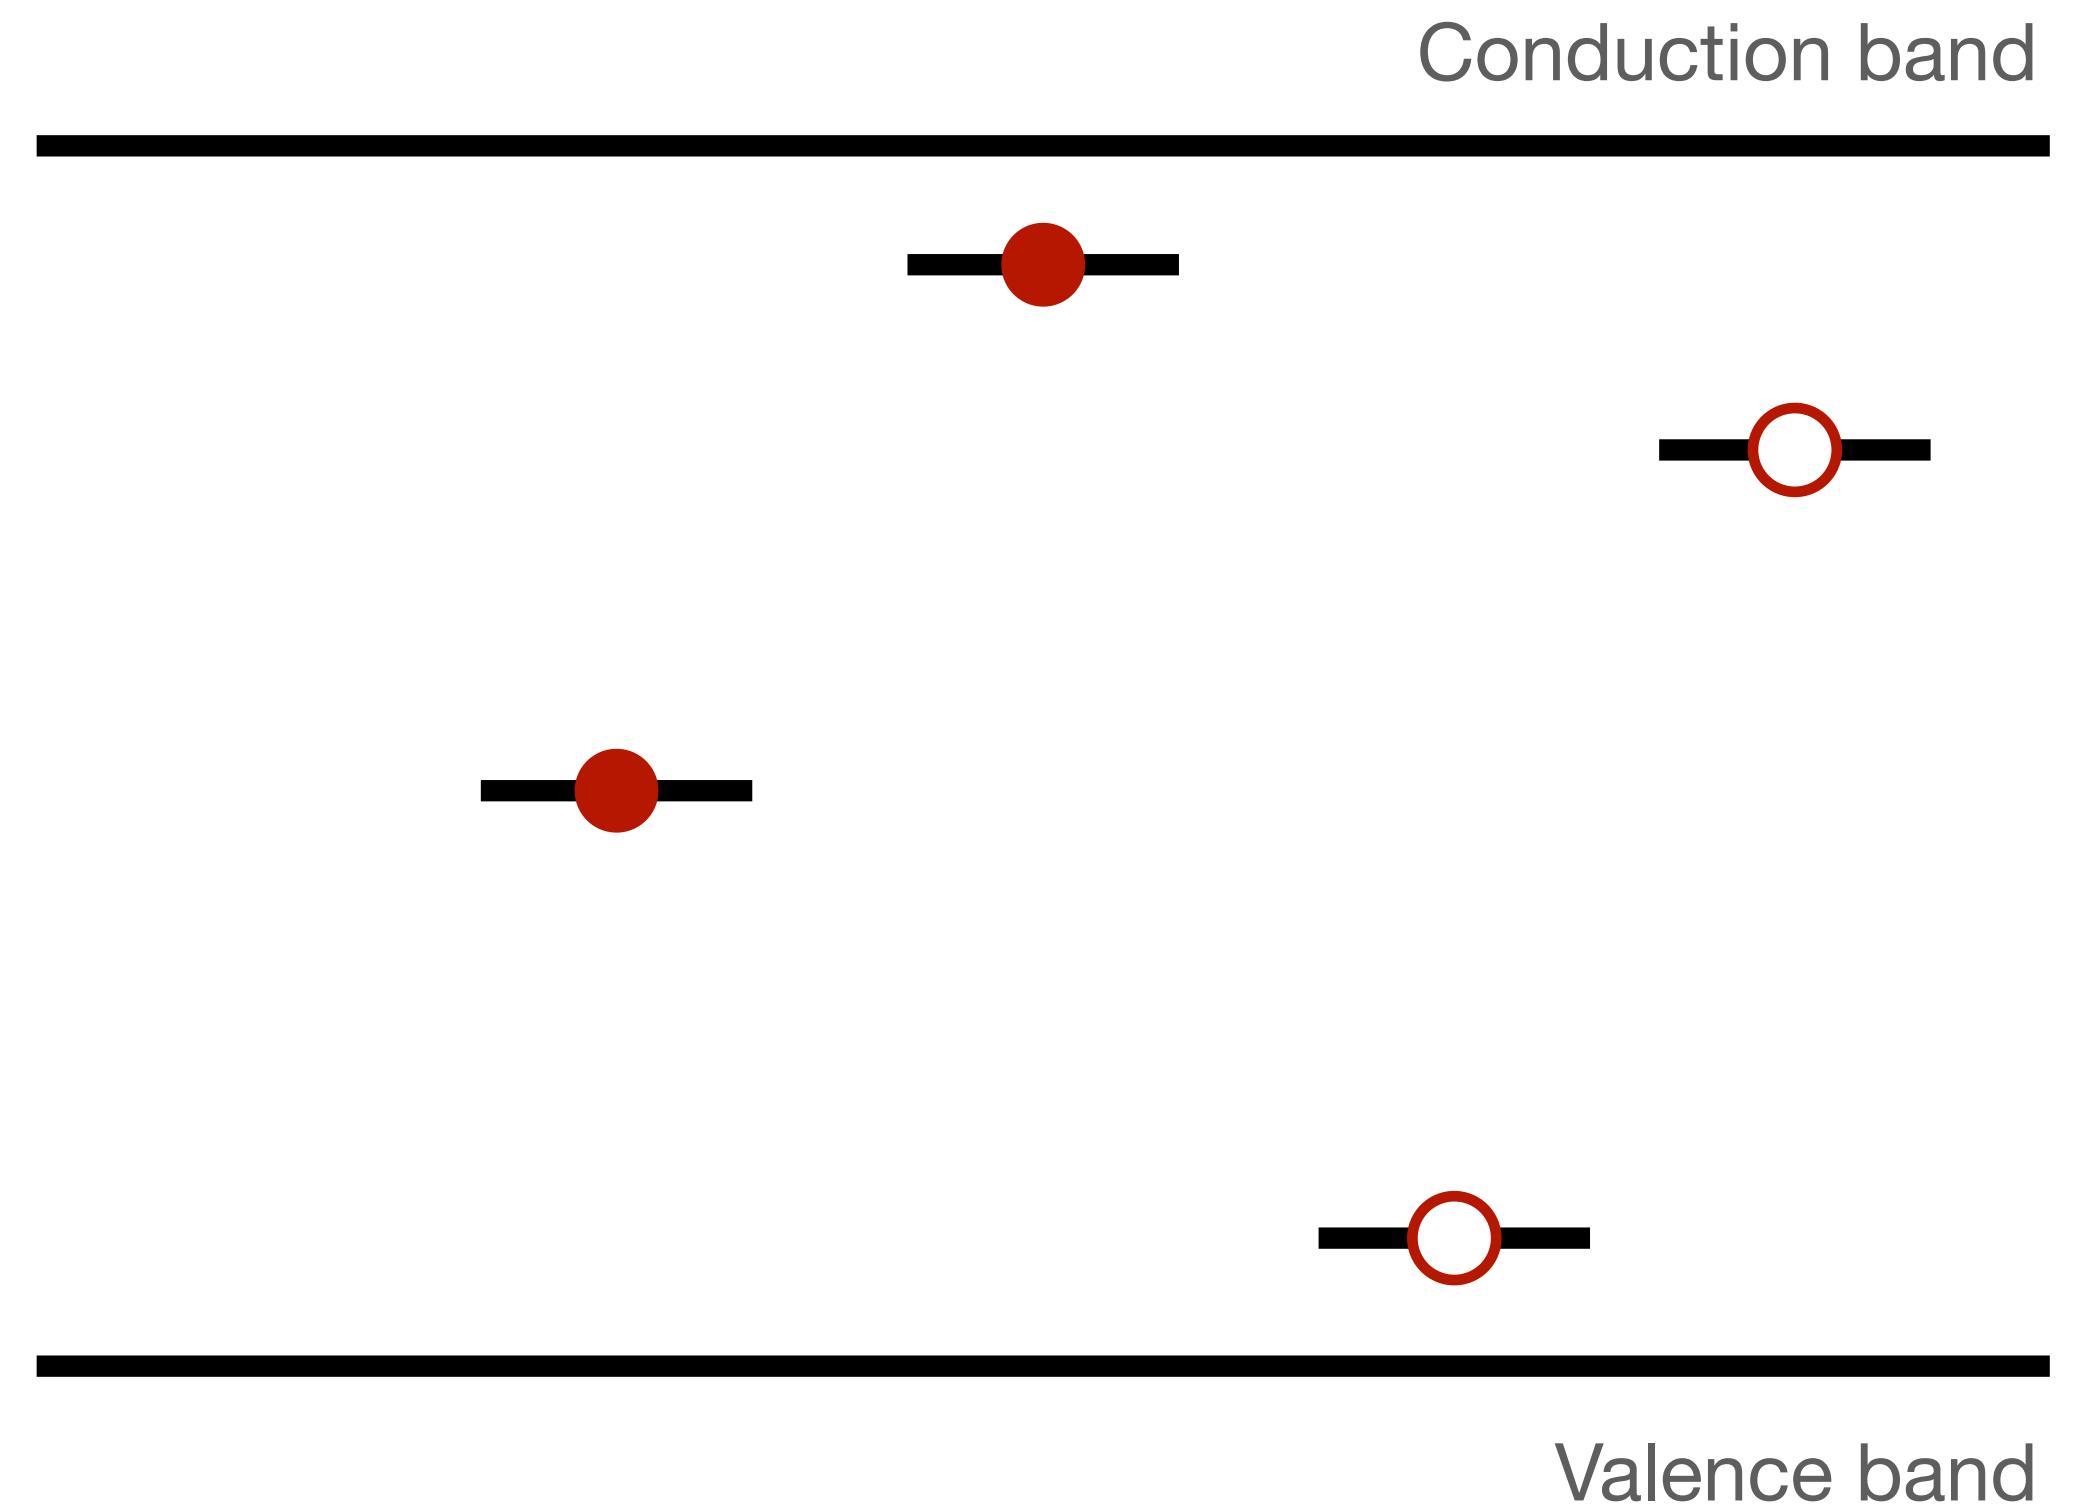


TSC - signal generation

We will start with the easier concept first - **Thermally**

Stimulated Current (TSC)

- This technique is quite straightforward:
 - Cool down your silicon detector (let's say 10 K)
 - Fill the traps with charge carriers
 - Apply a reverse bias to the sample

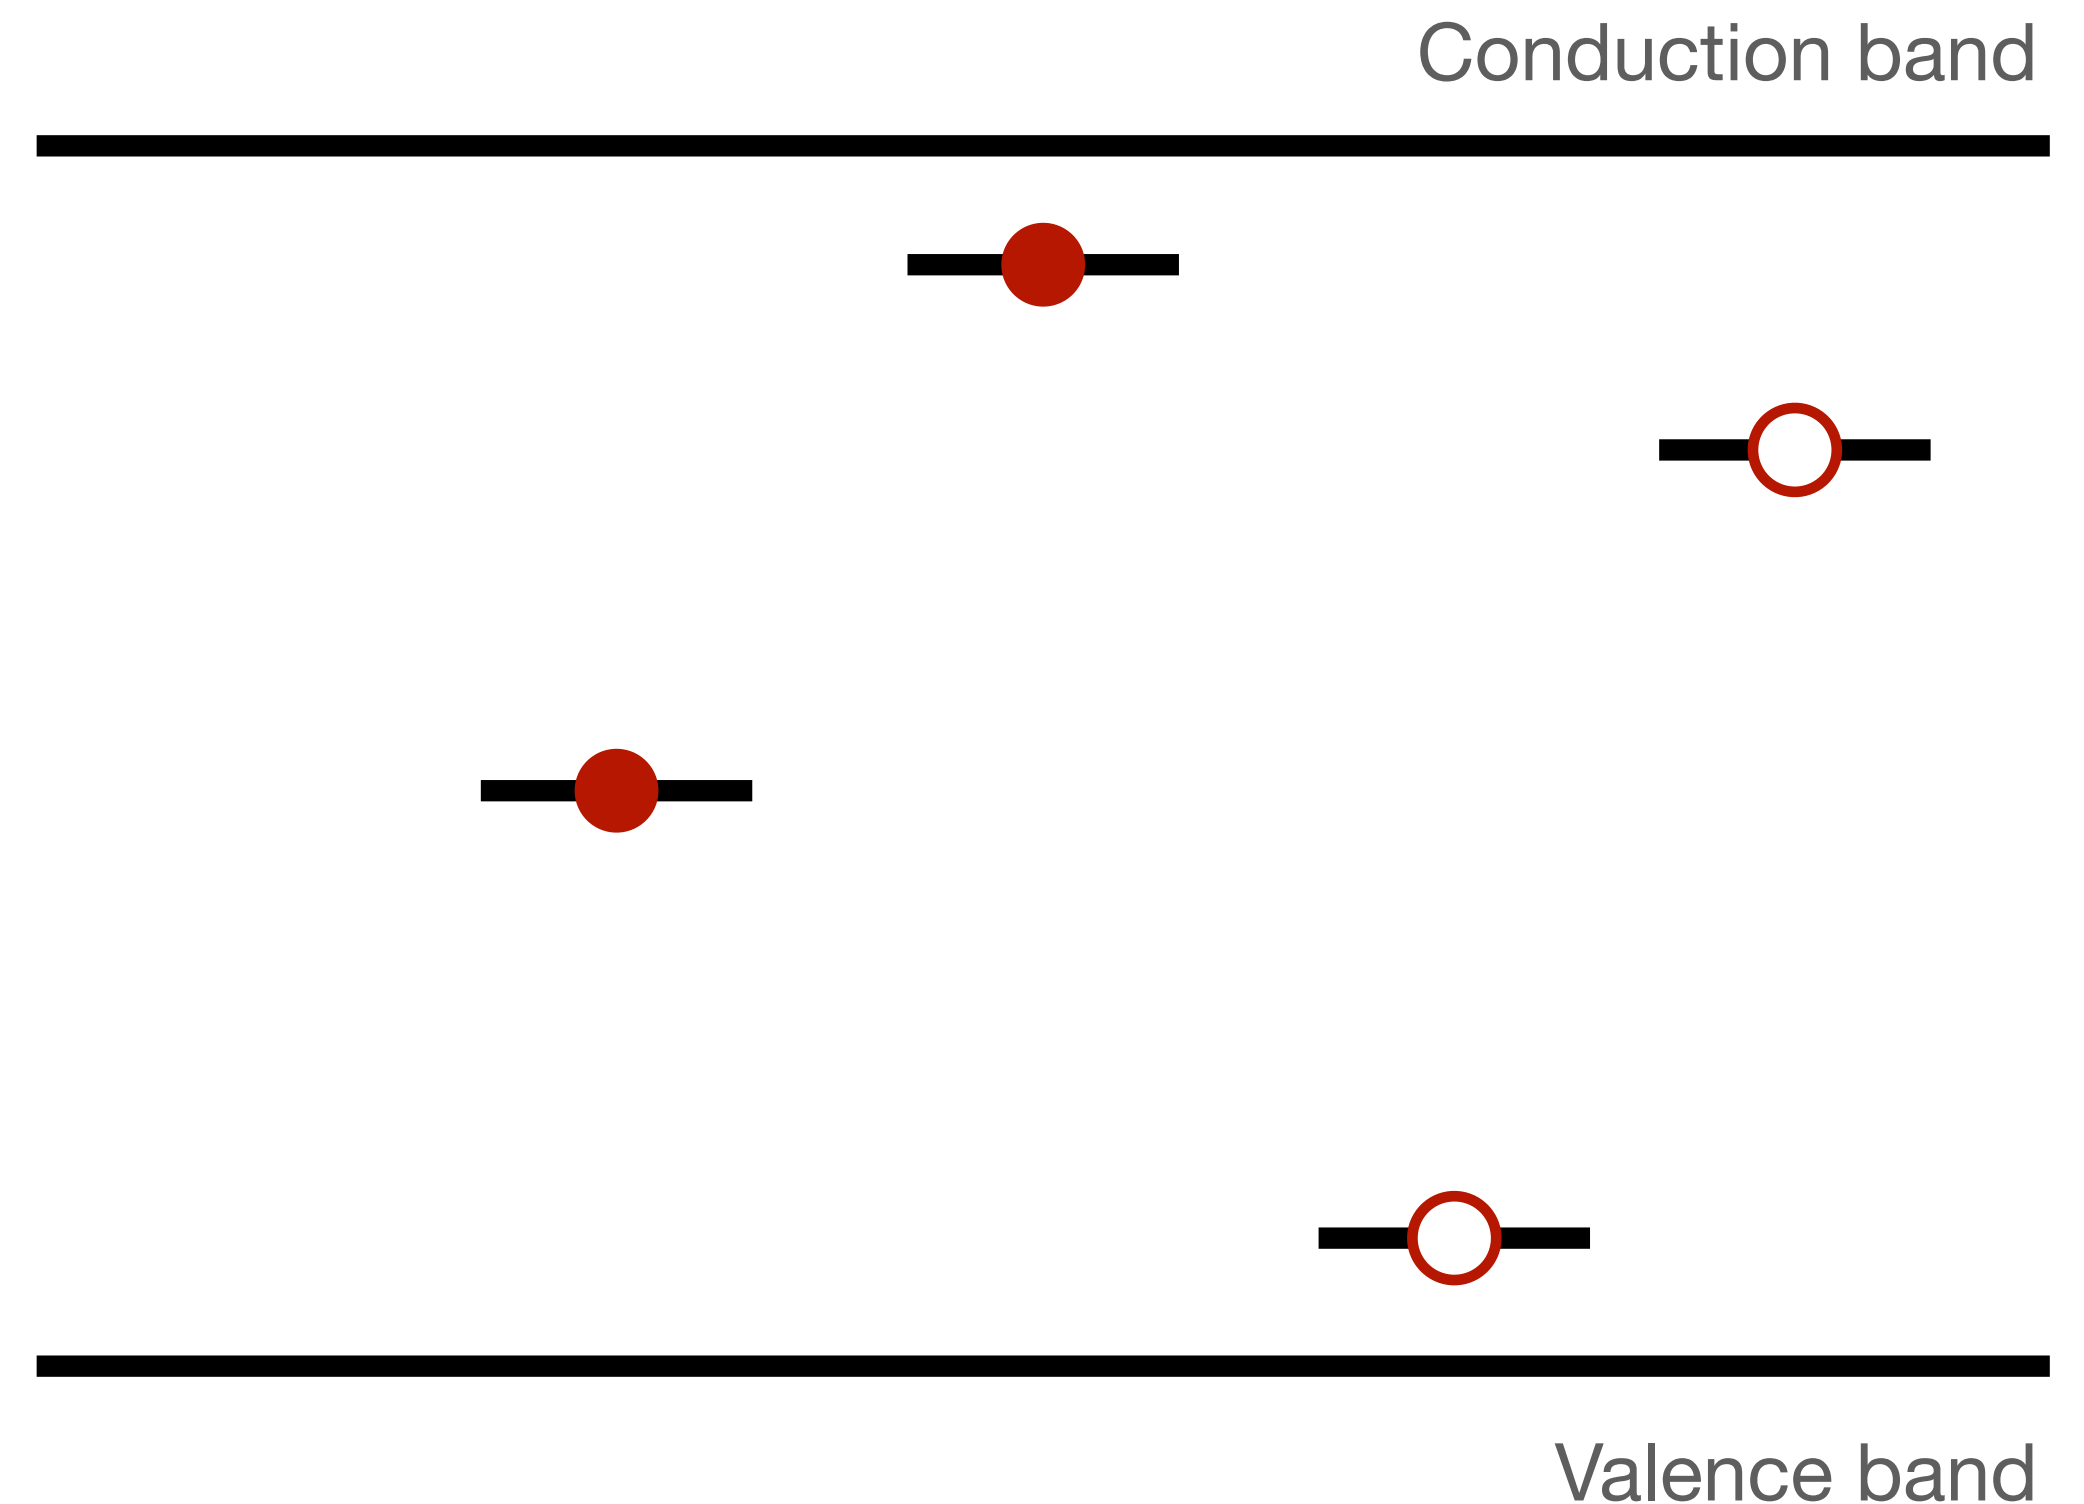




TSC - signal generation

We will start with the easier concept first - **Thermally**

Stimulated Current (TSC)



- This technique is quite straightforward:
 - Cool down your silicon detector (let's say 10 K)
 - Fill the traps with charge carriers
 - Apply a reverse bias to the sample
 - Increase the temperature at a fixed rate and look for current peaks

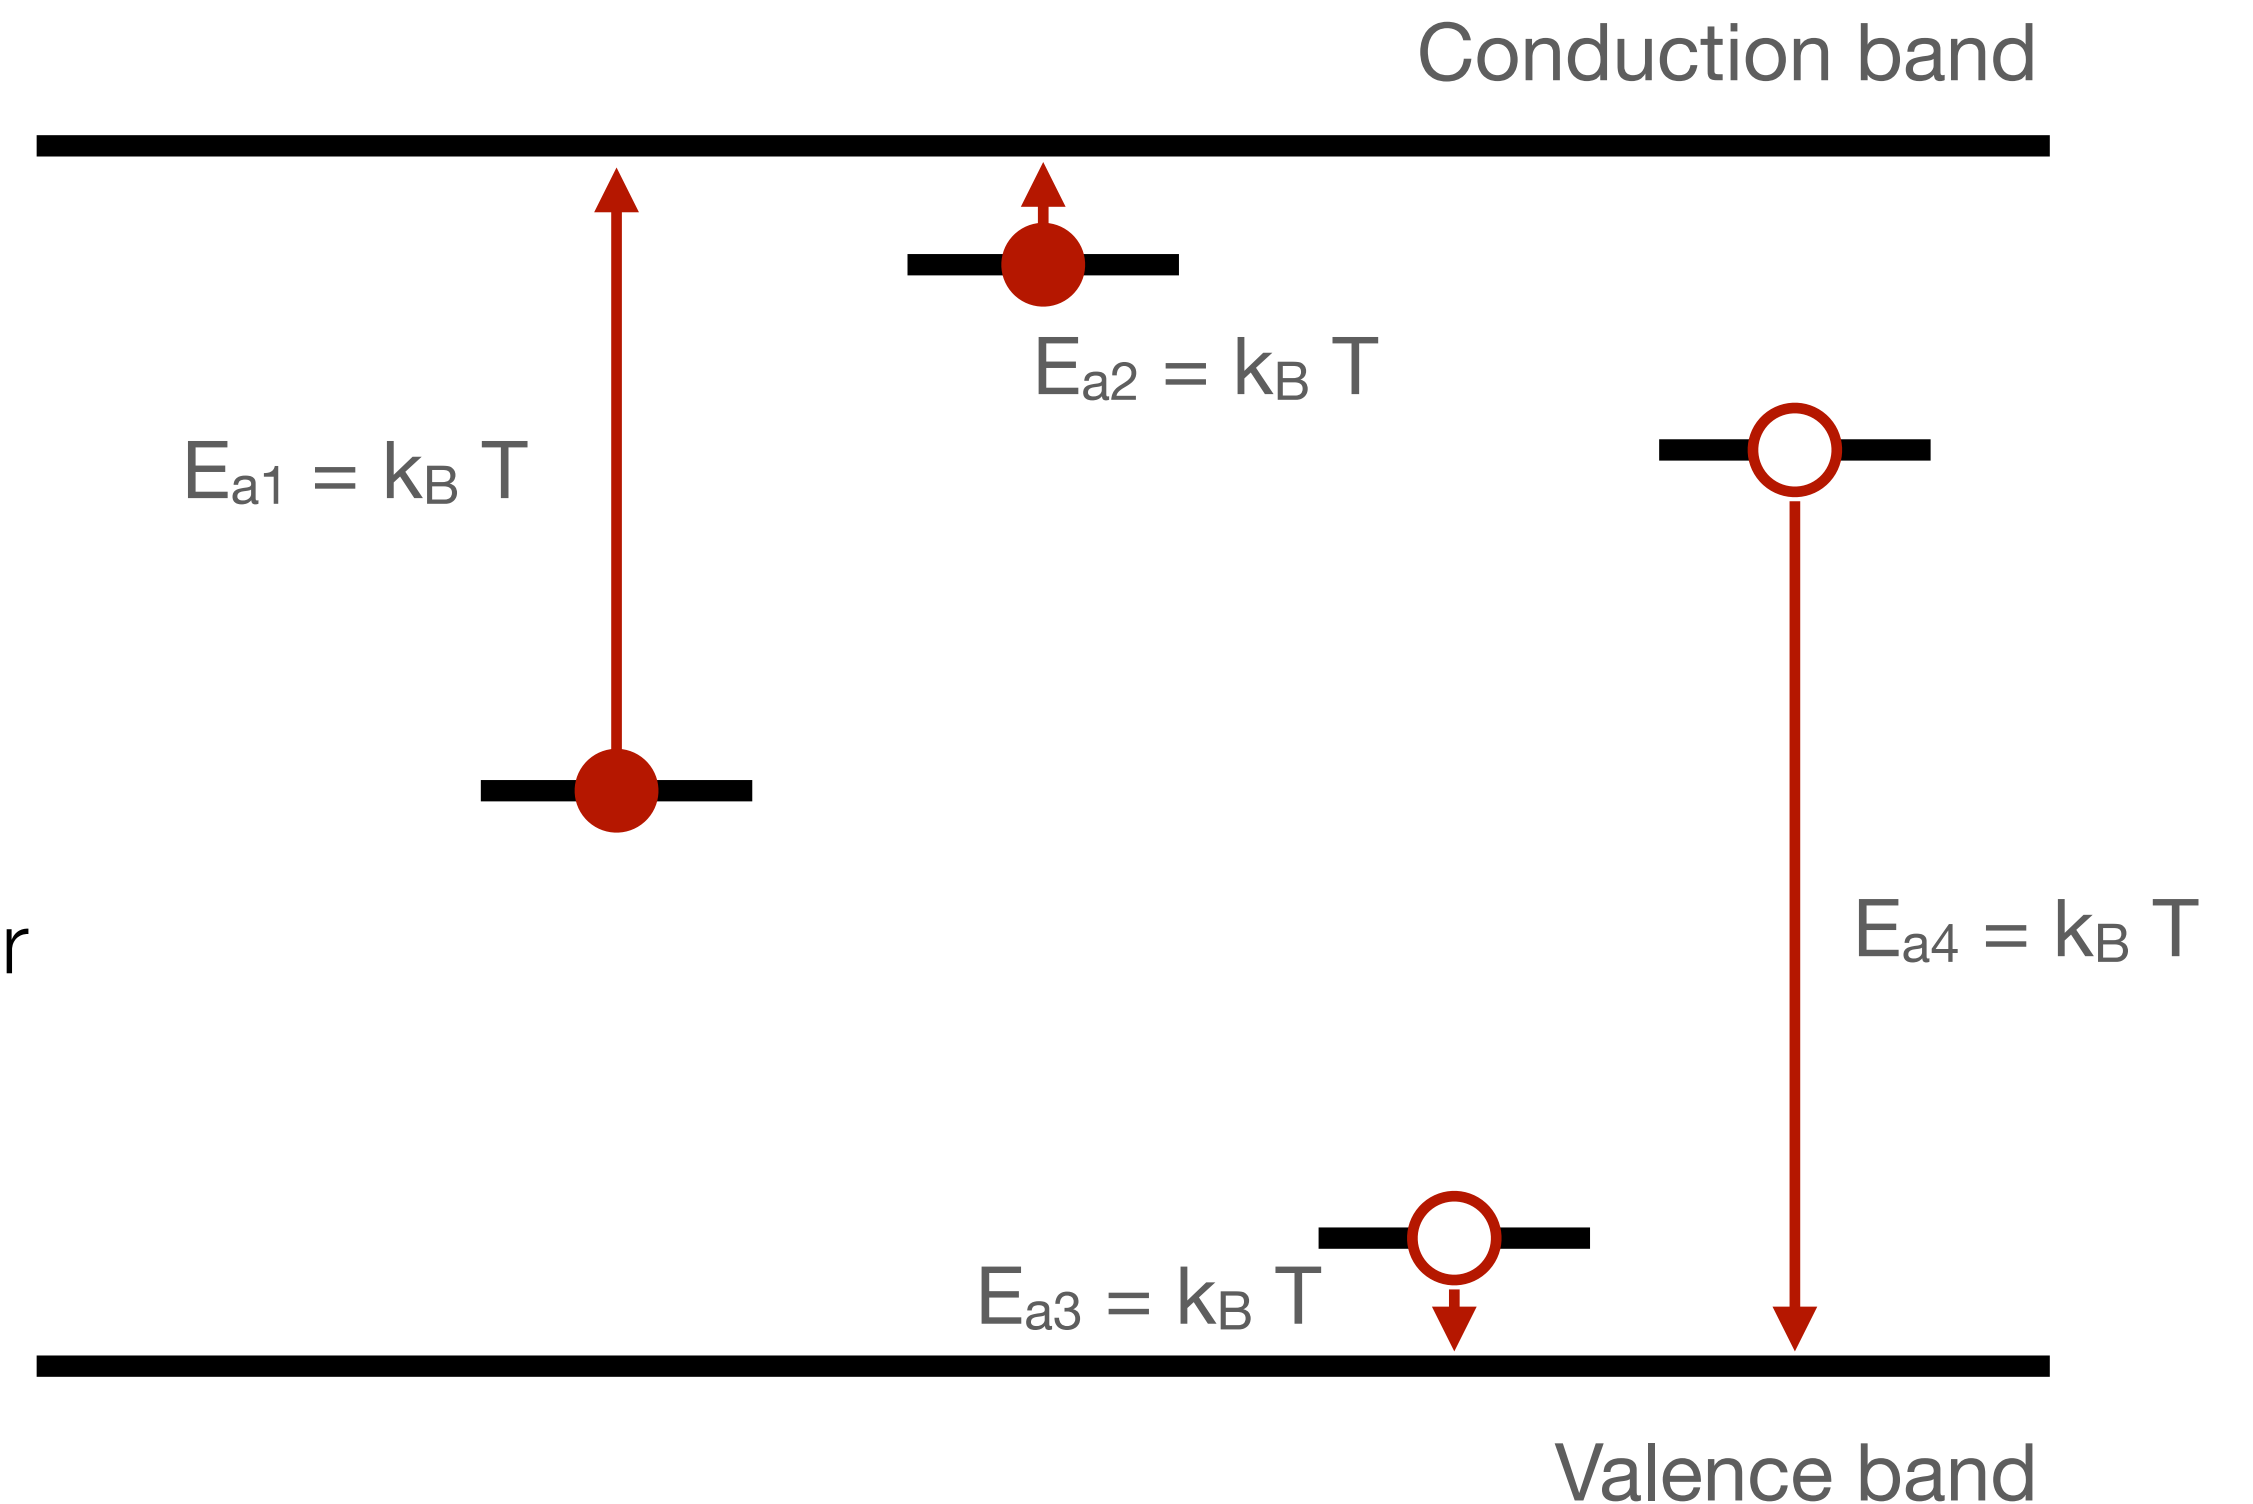

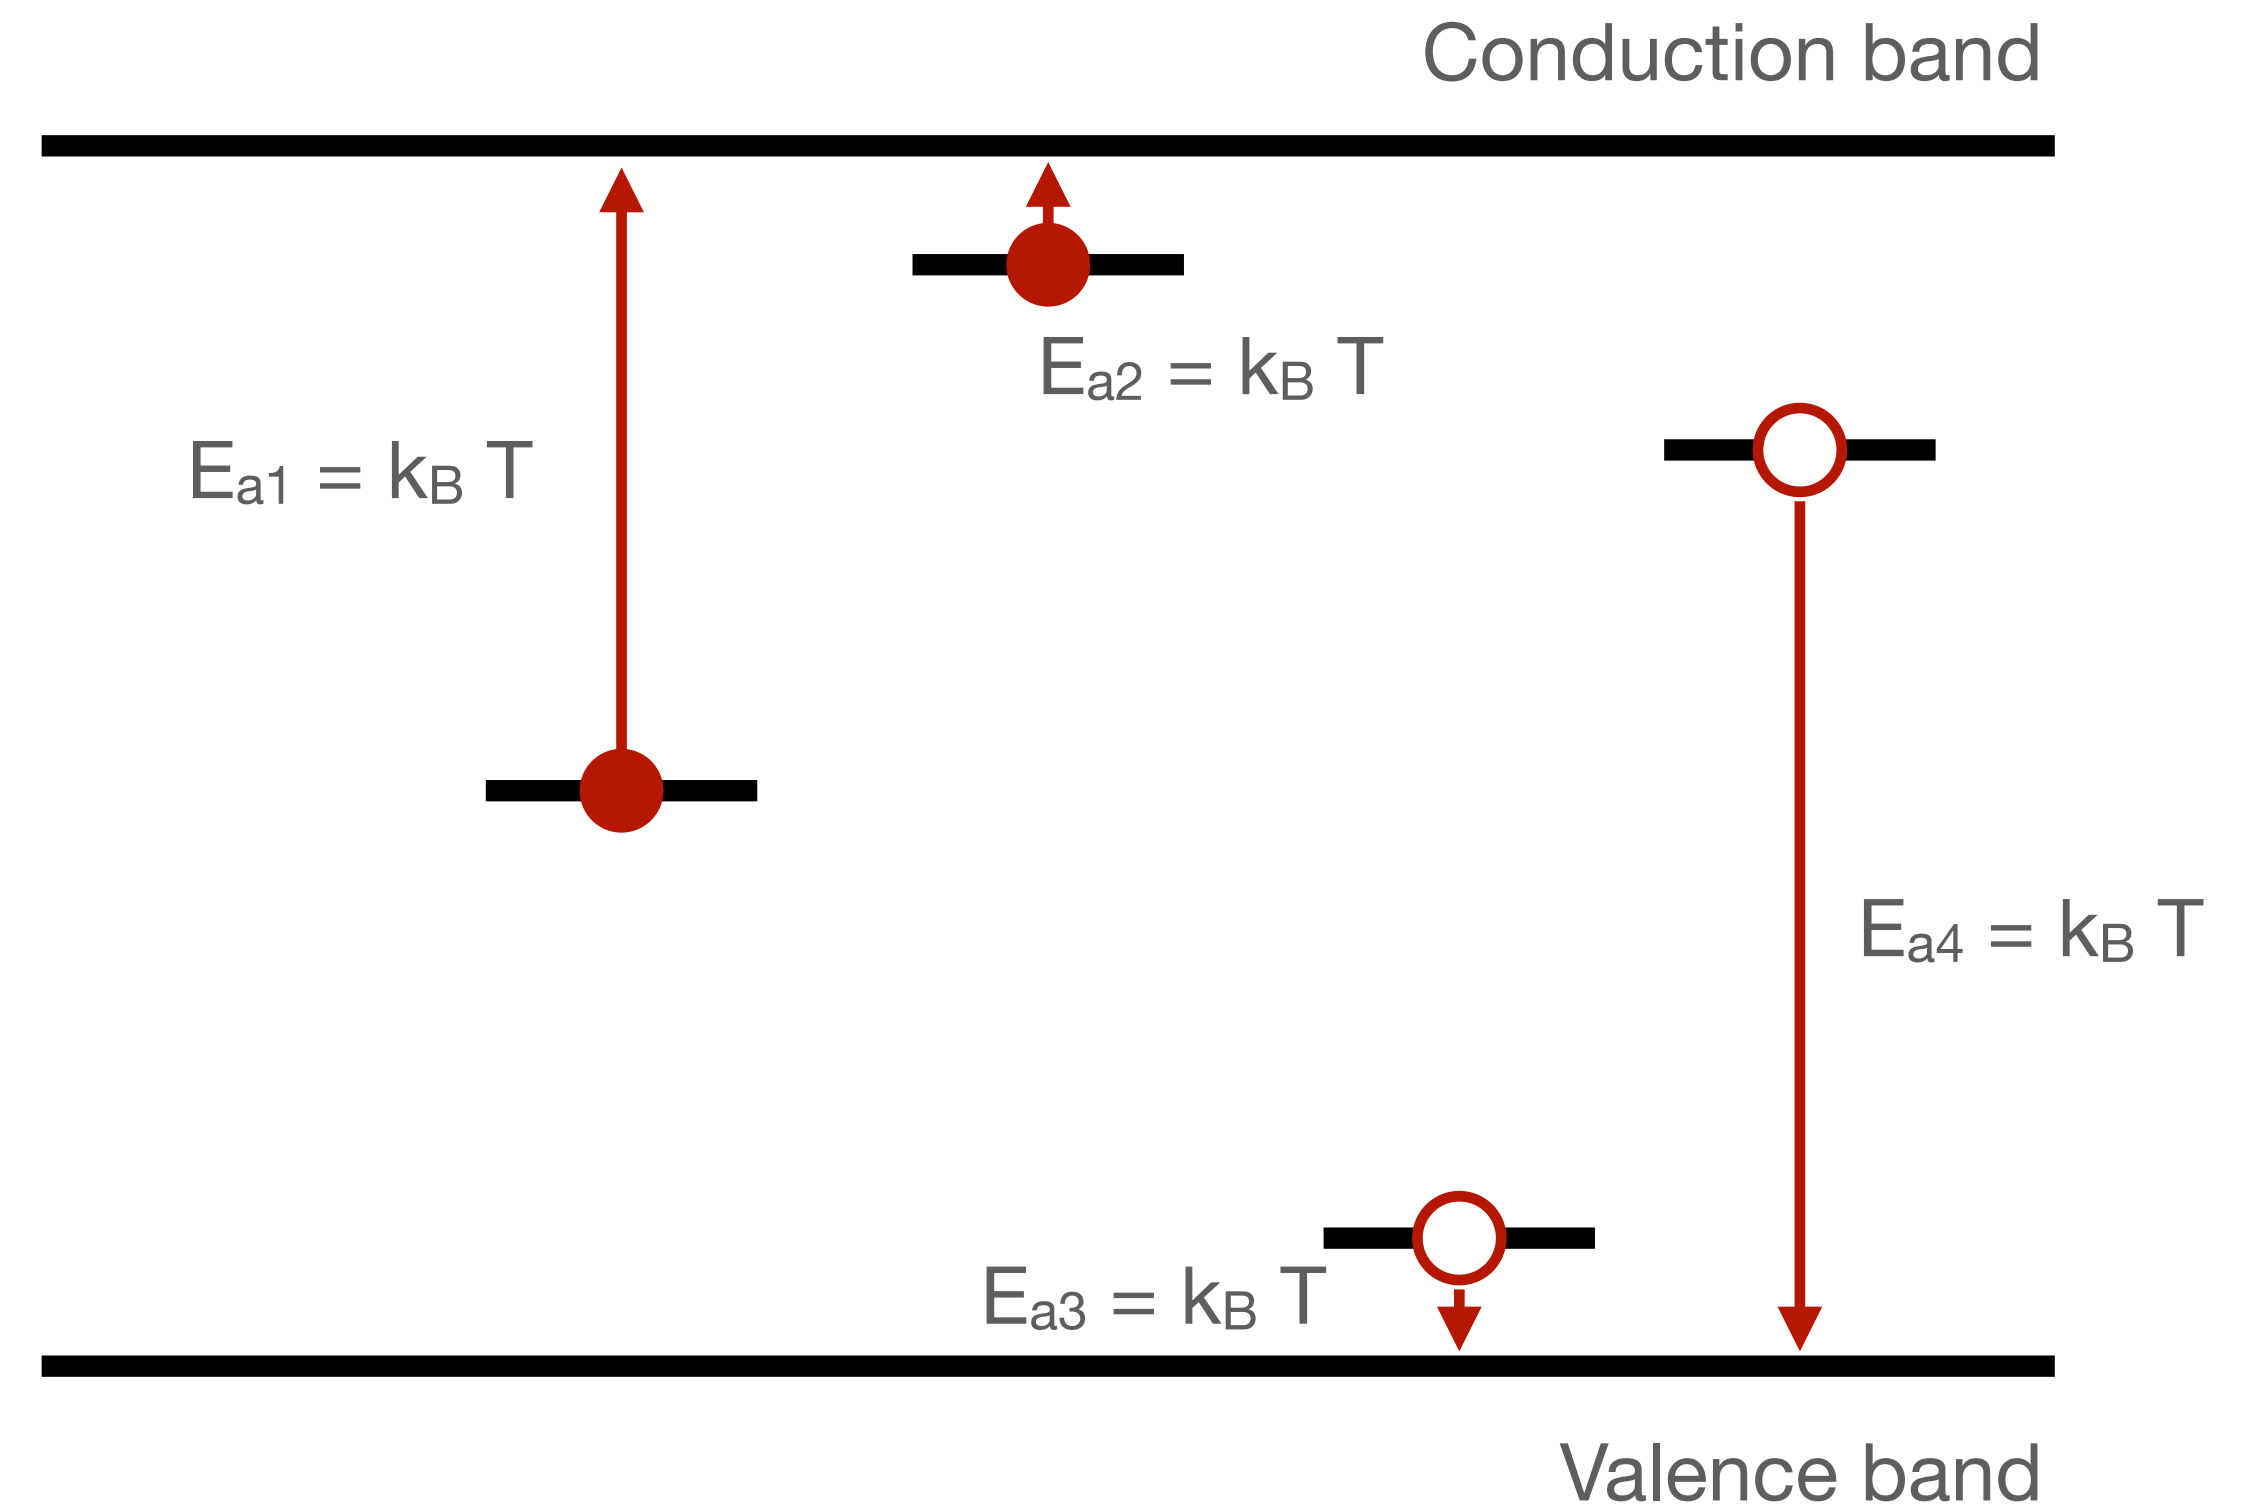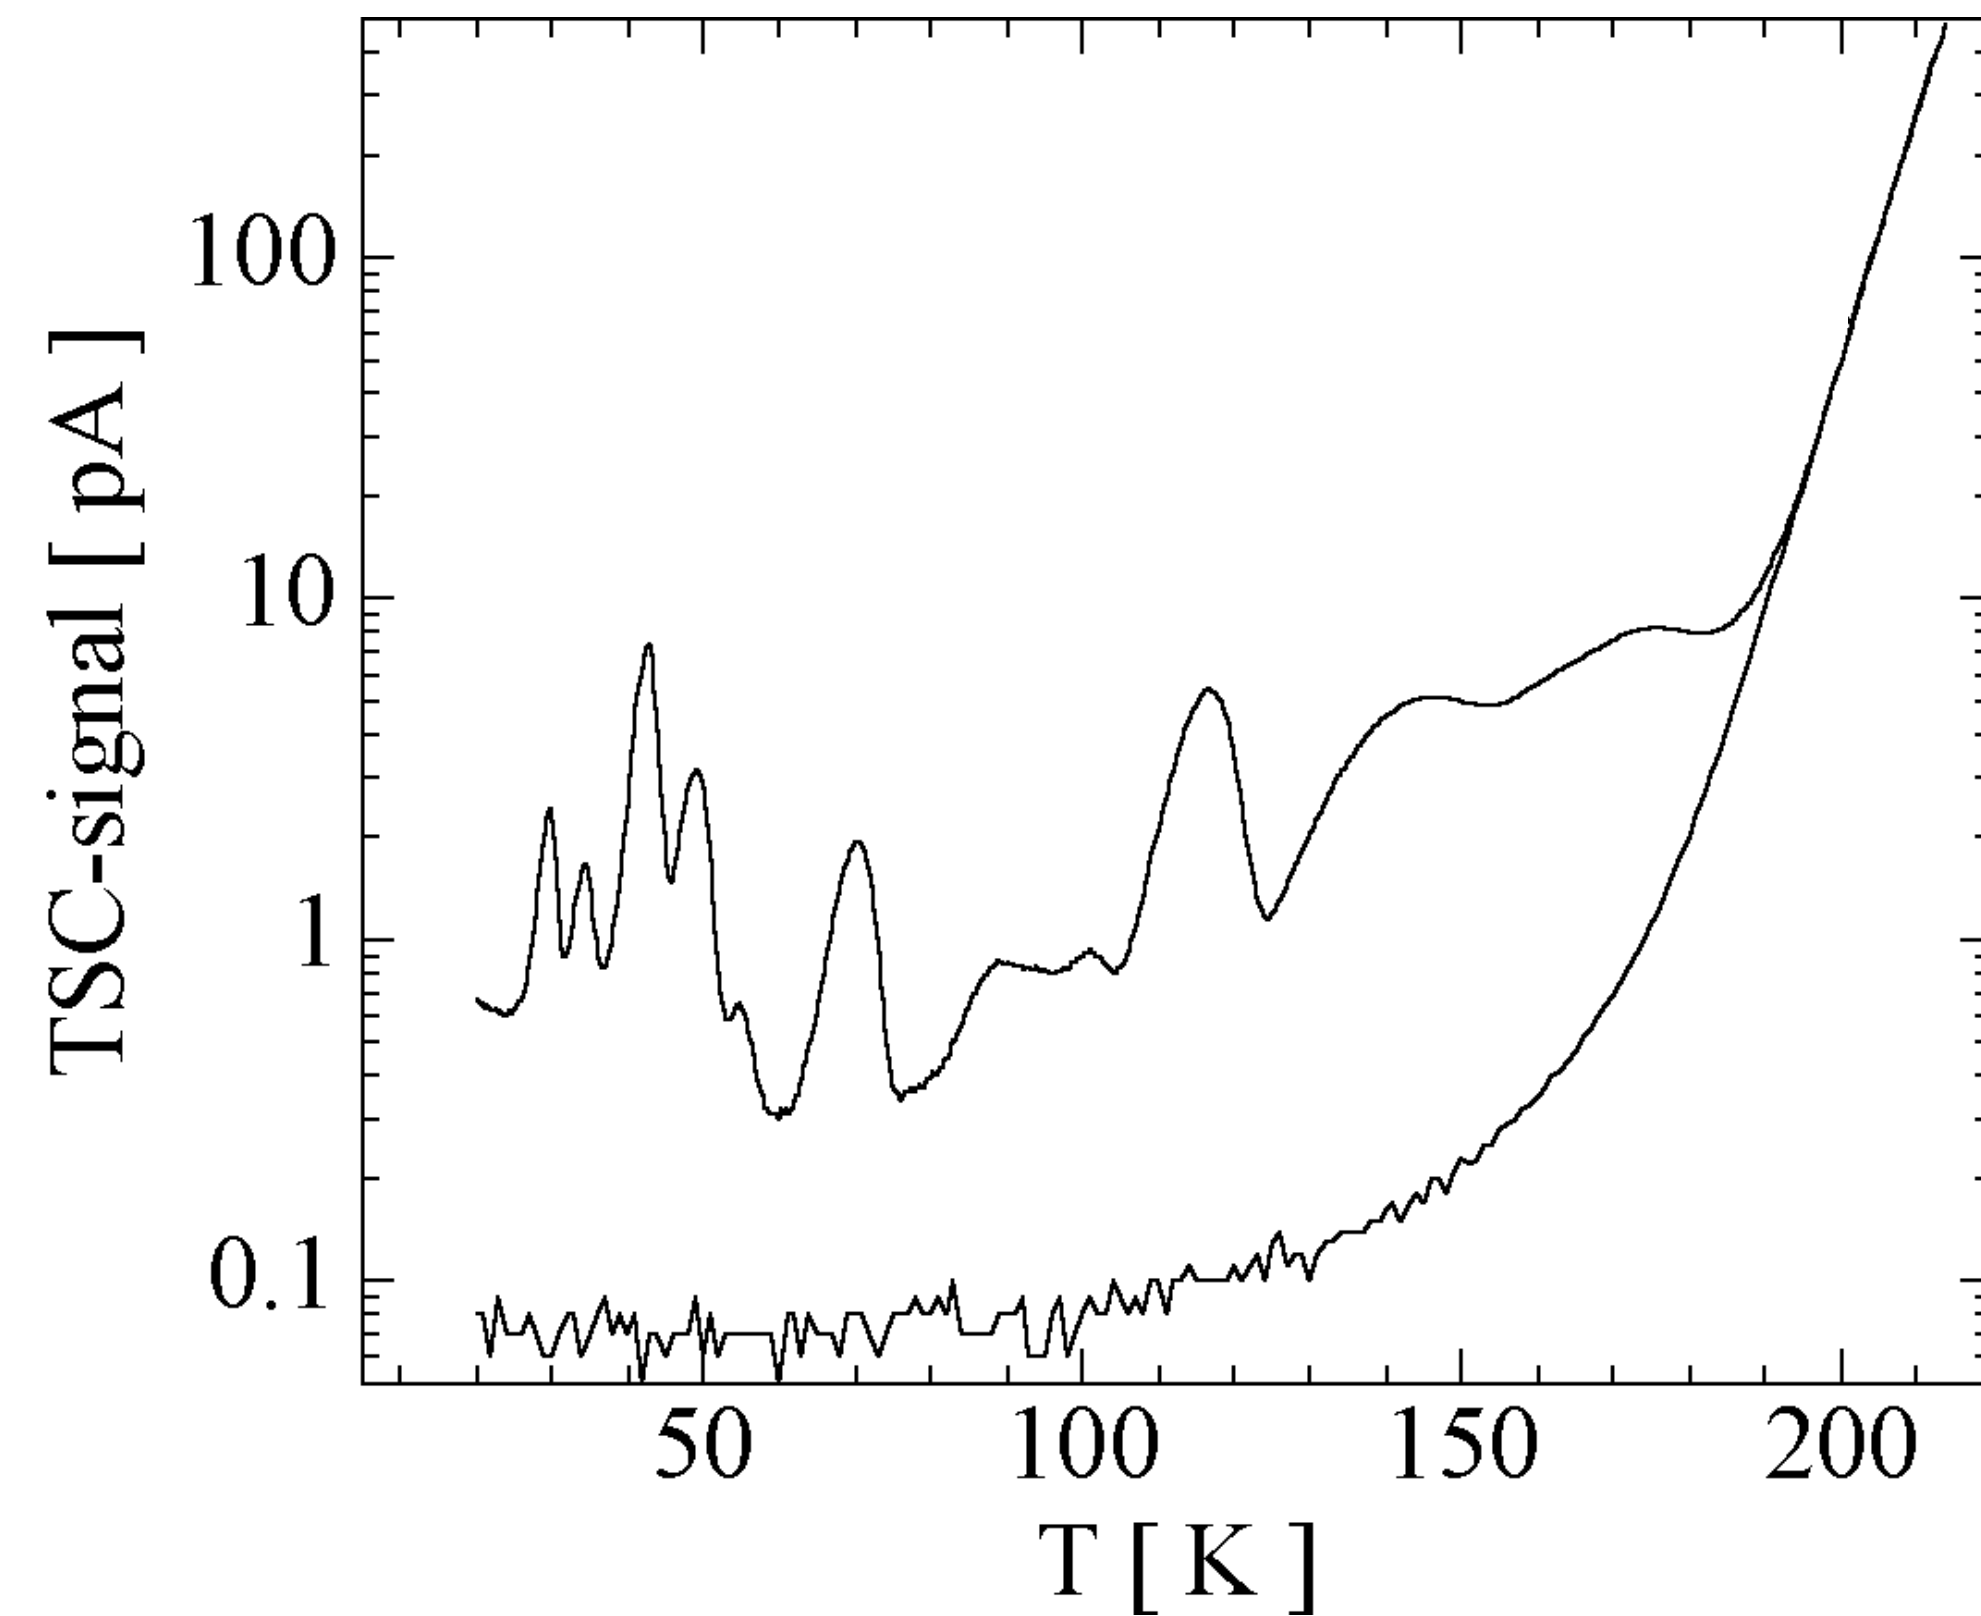


Something to note about TSC:

- We can measure the defect activation energy (roughly) and concentration, but we **do not know if they are electron or hole traps**; we only see the total current
- To investigate this we need more techniques (DLTS...)

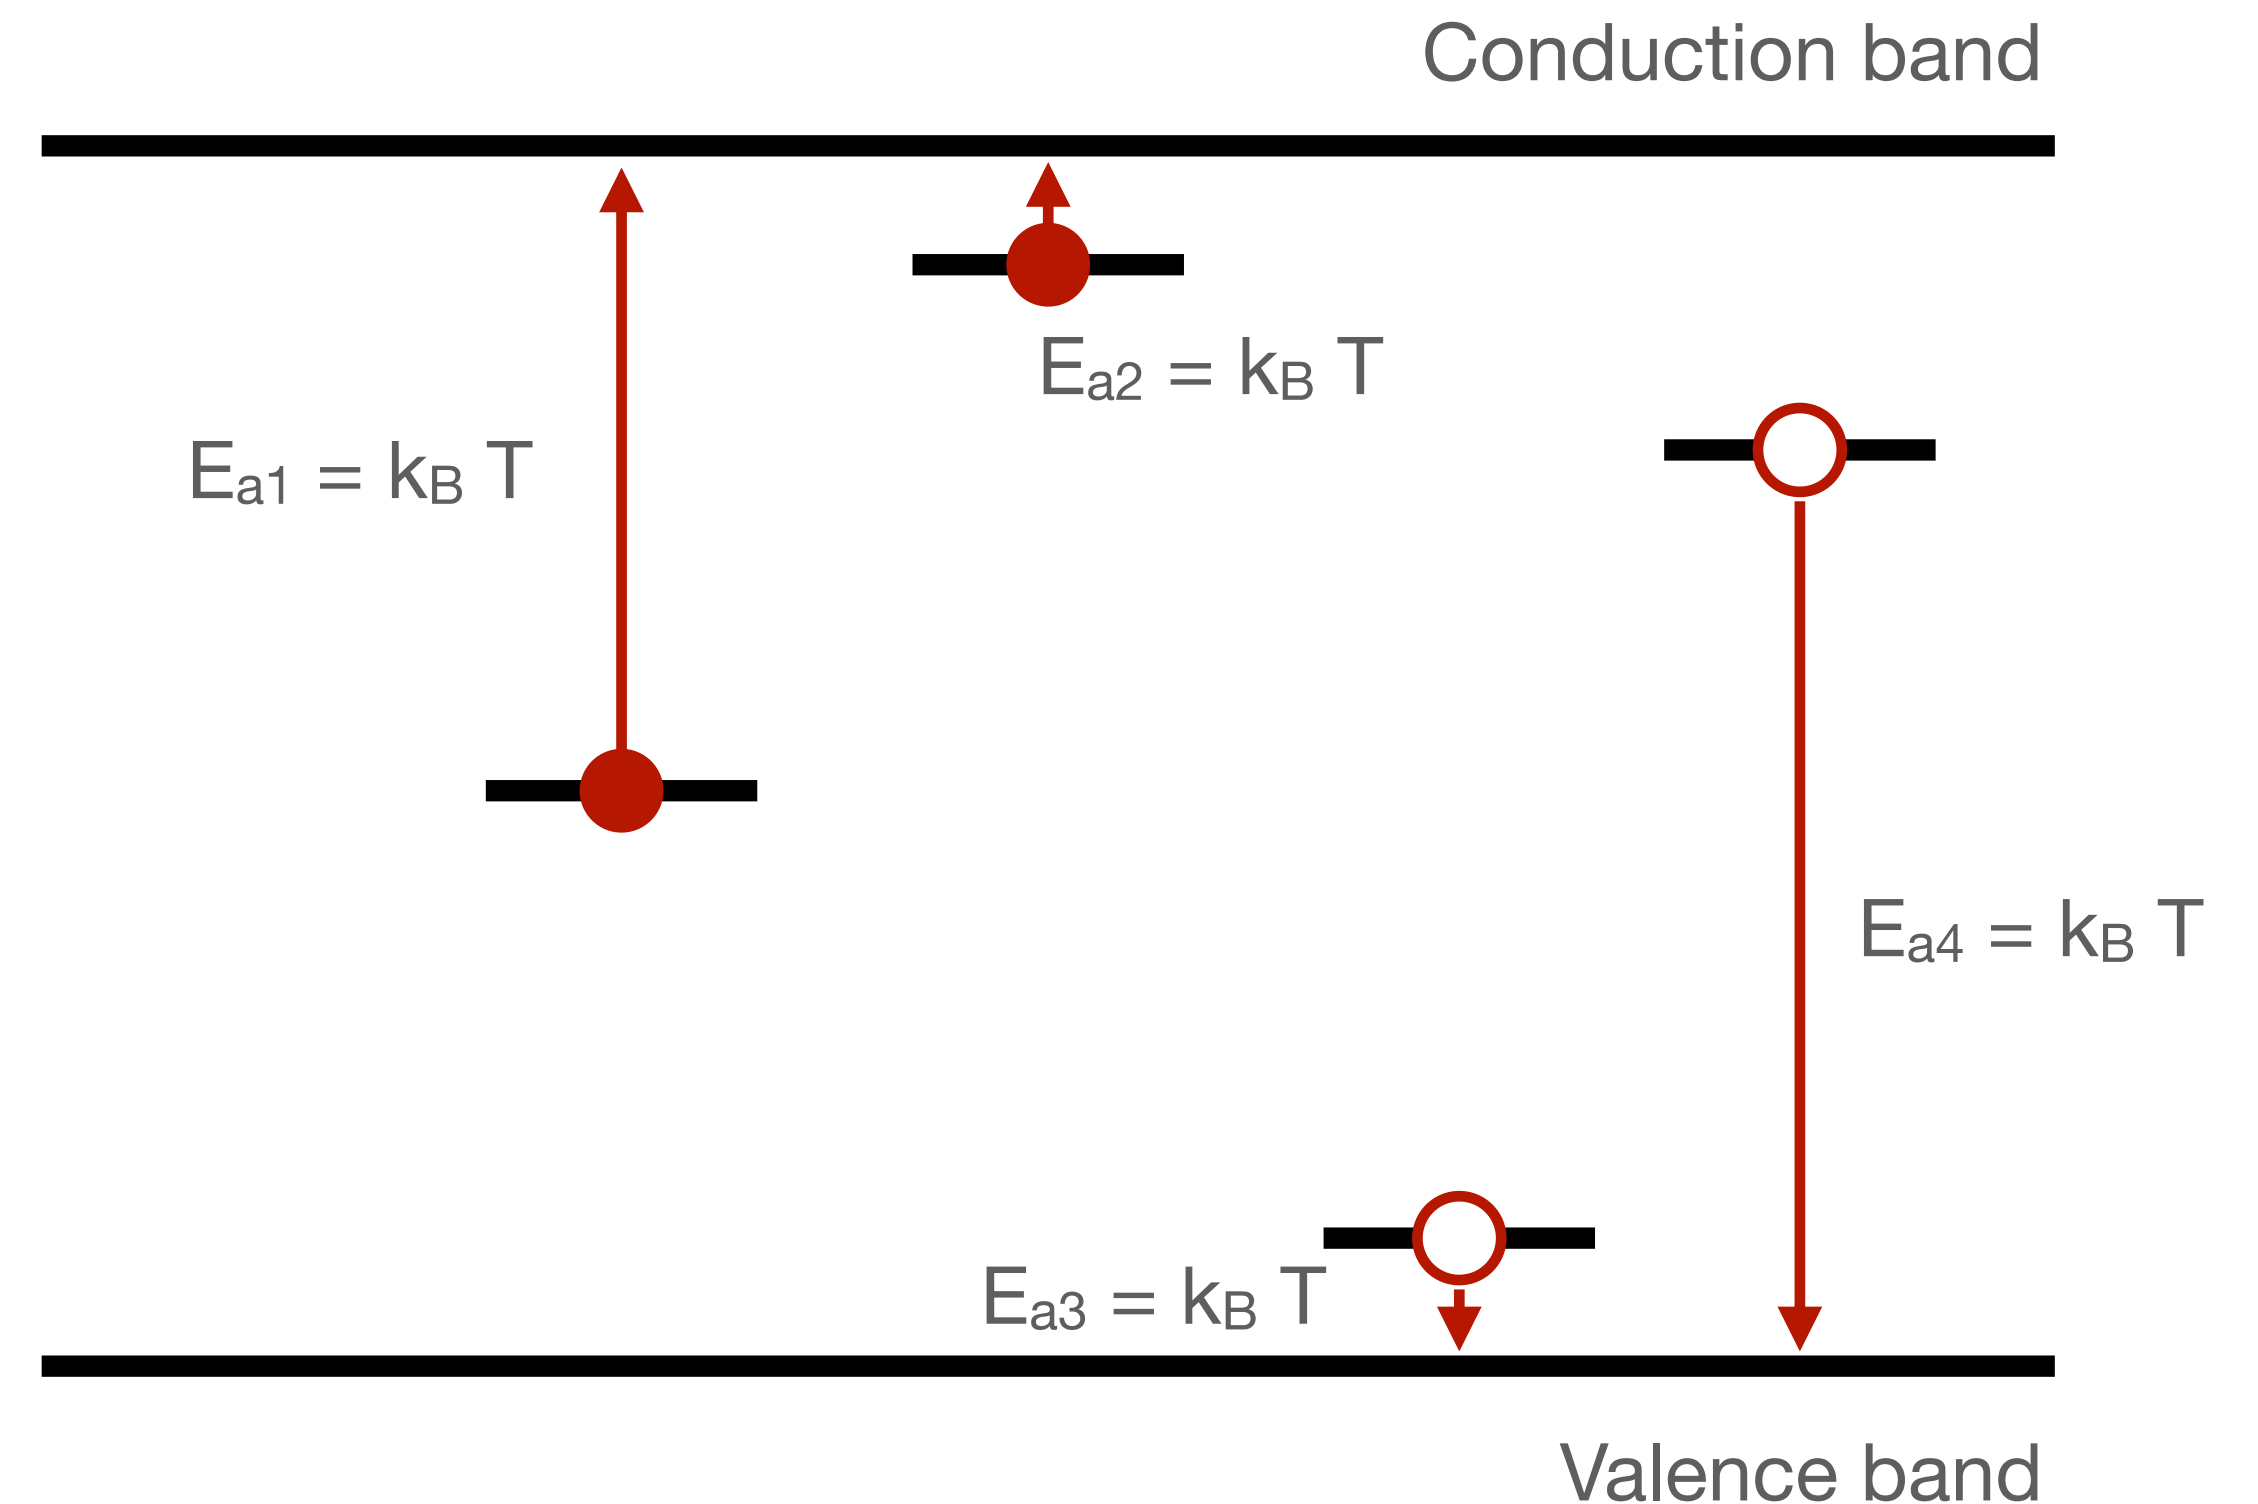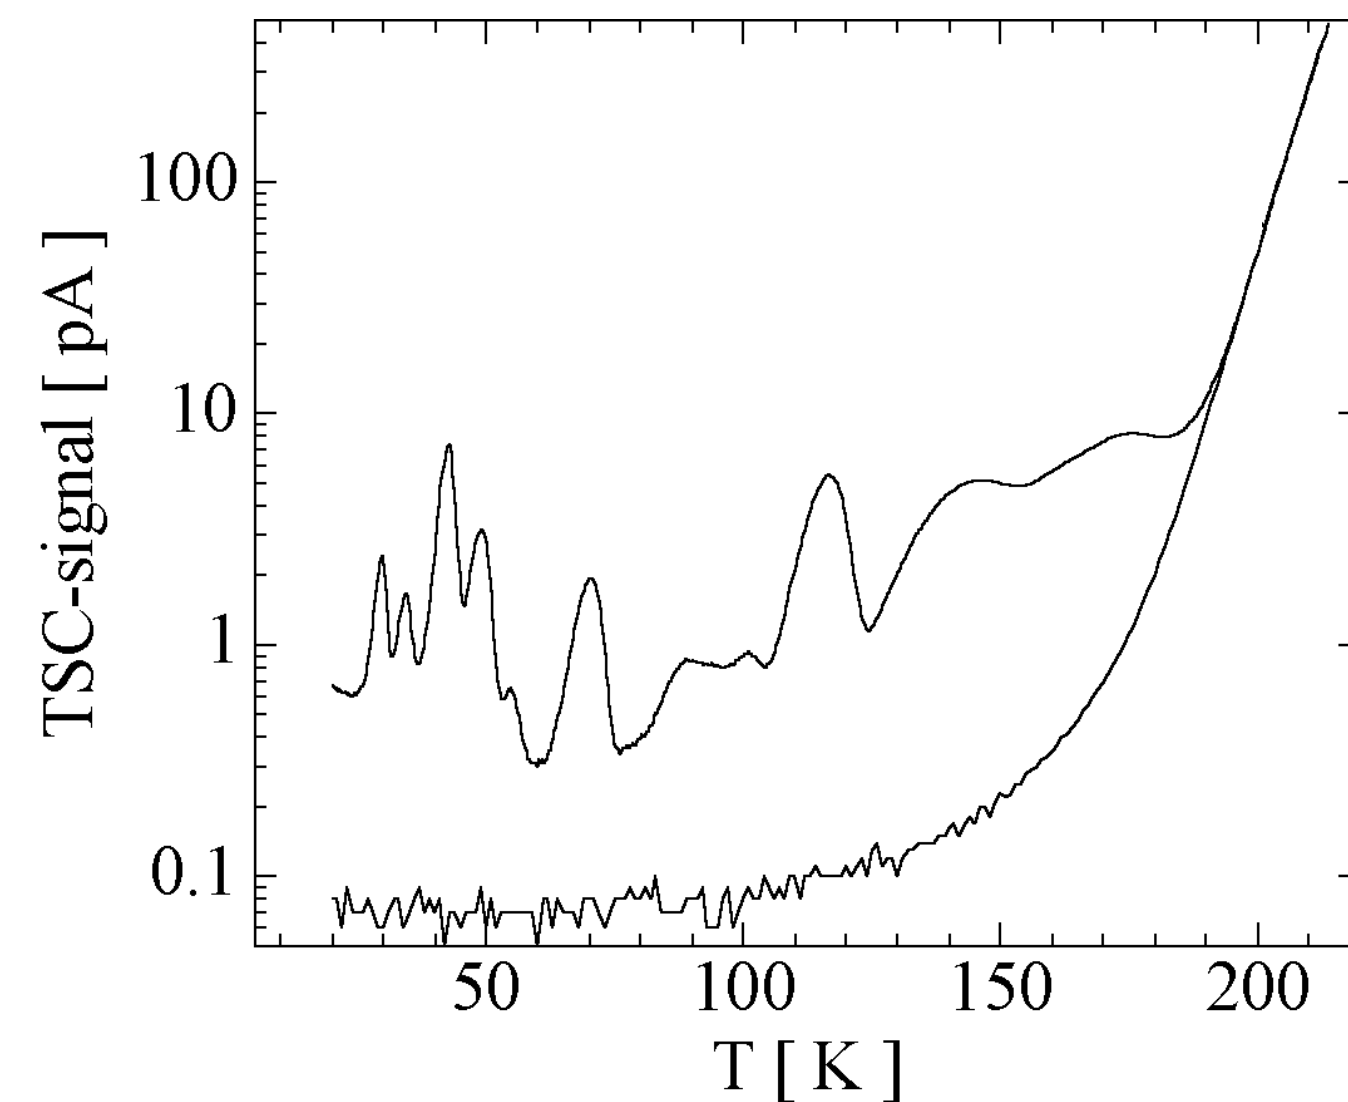

Filling the traps


How do we fill the traps at low energy?

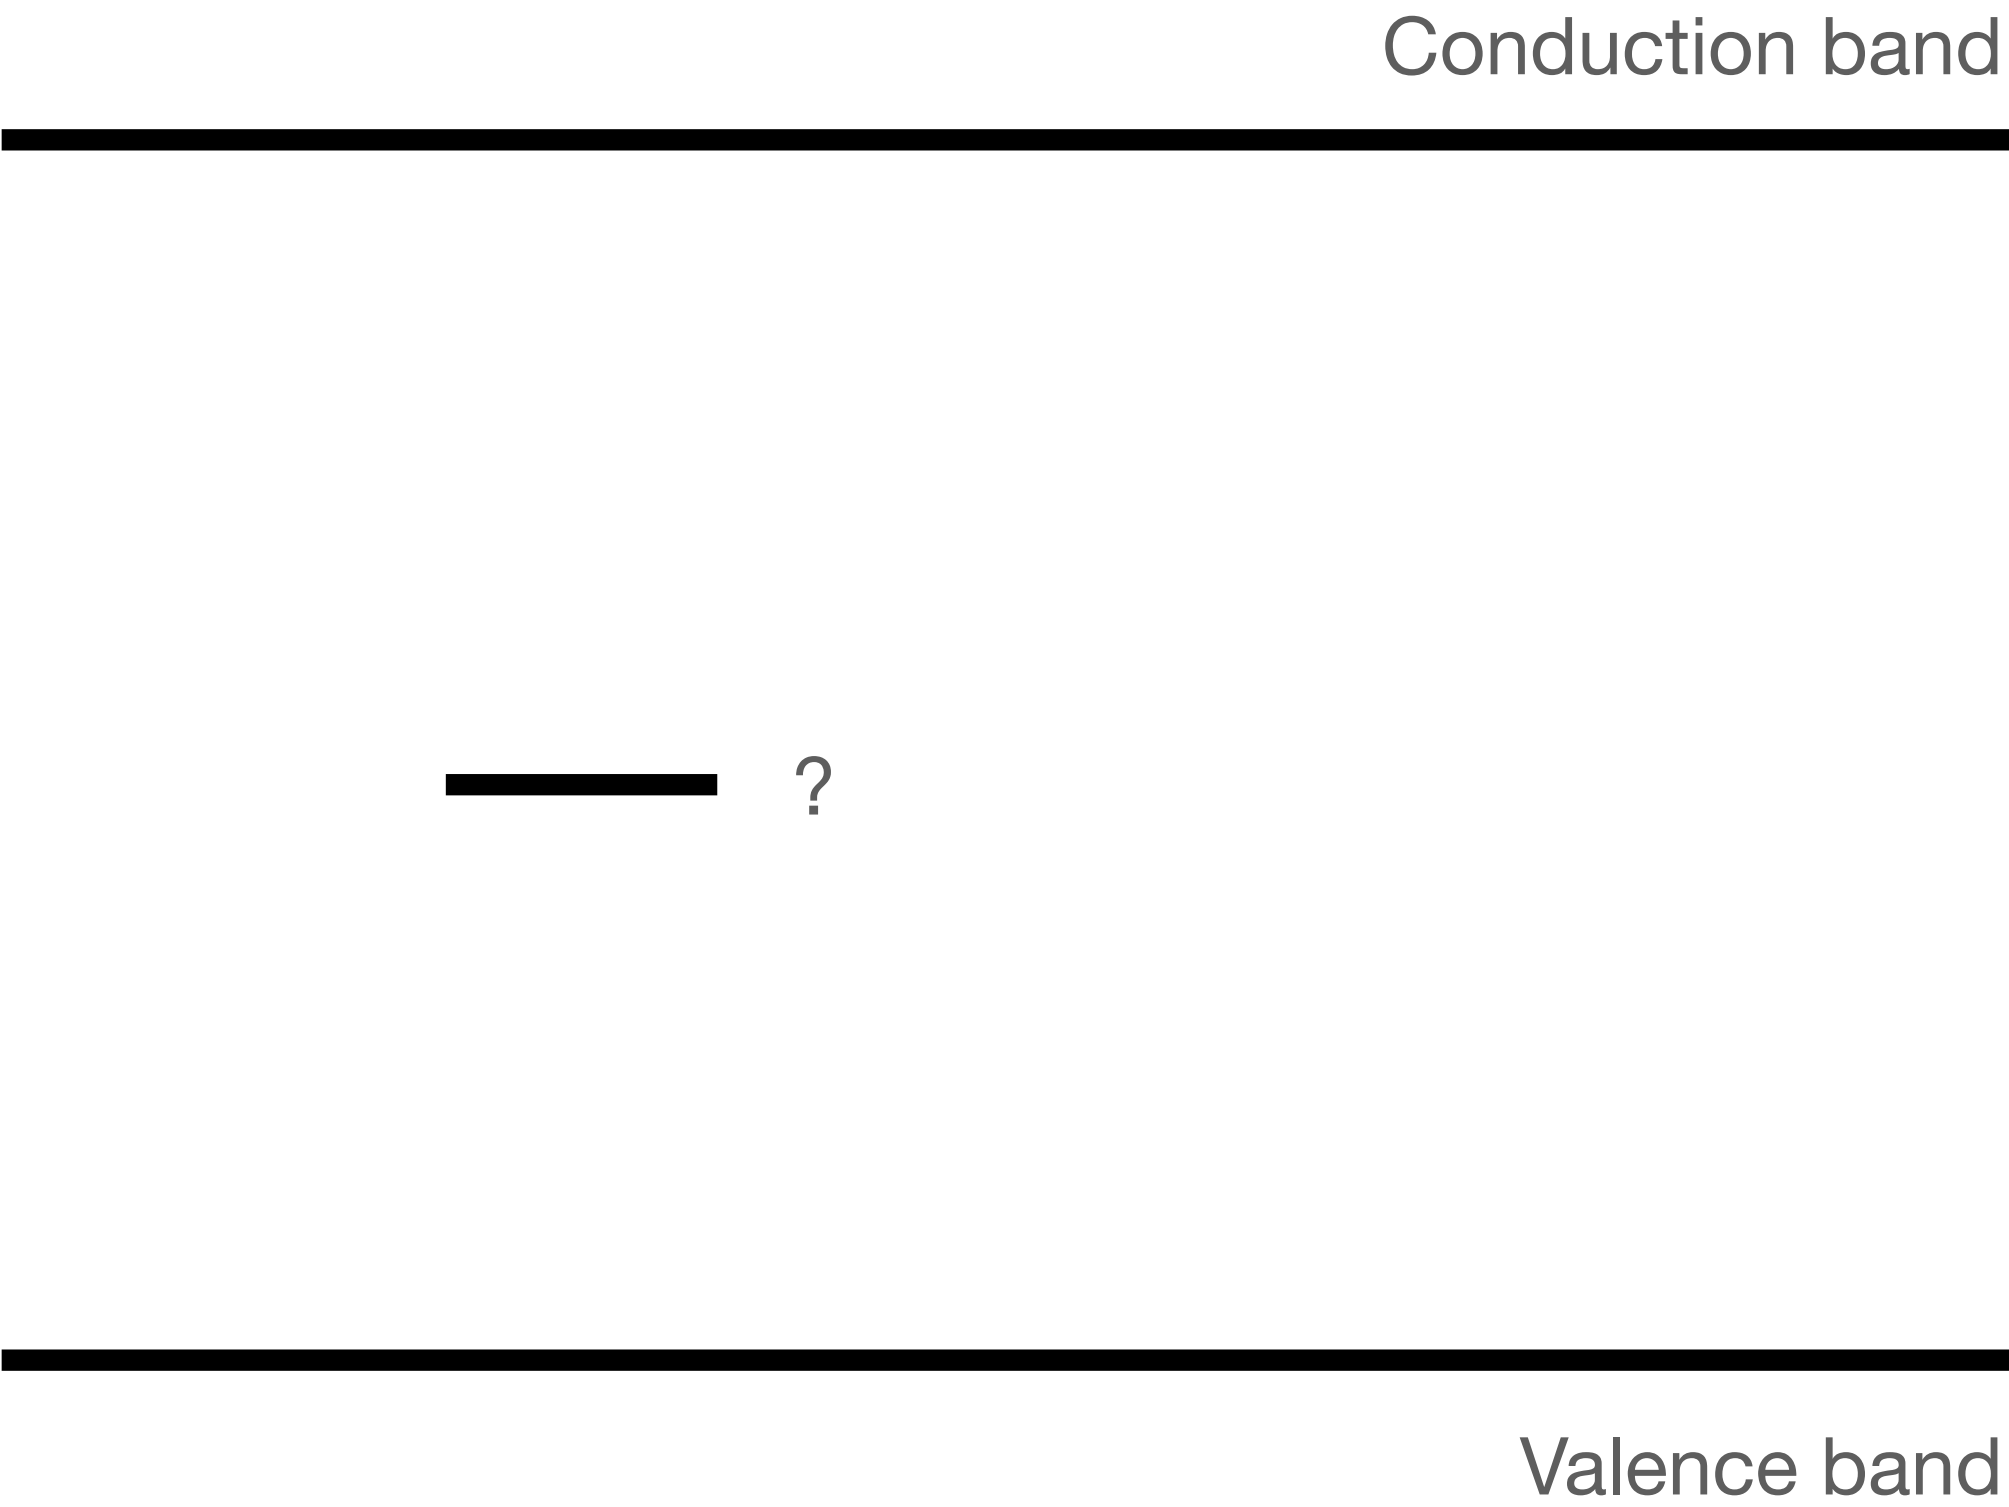

Filling the traps - optically

How do we fill the traps at low energy?


- One option is obviously to inject light on the sample
- Electron-hole pairs are generated along the path of the laser
- These charge carriers can be trapped by traps throughout the bulk (though some ambiguity if defects act as **both** donors and acceptors - filling will be by ratio of cross-sections)

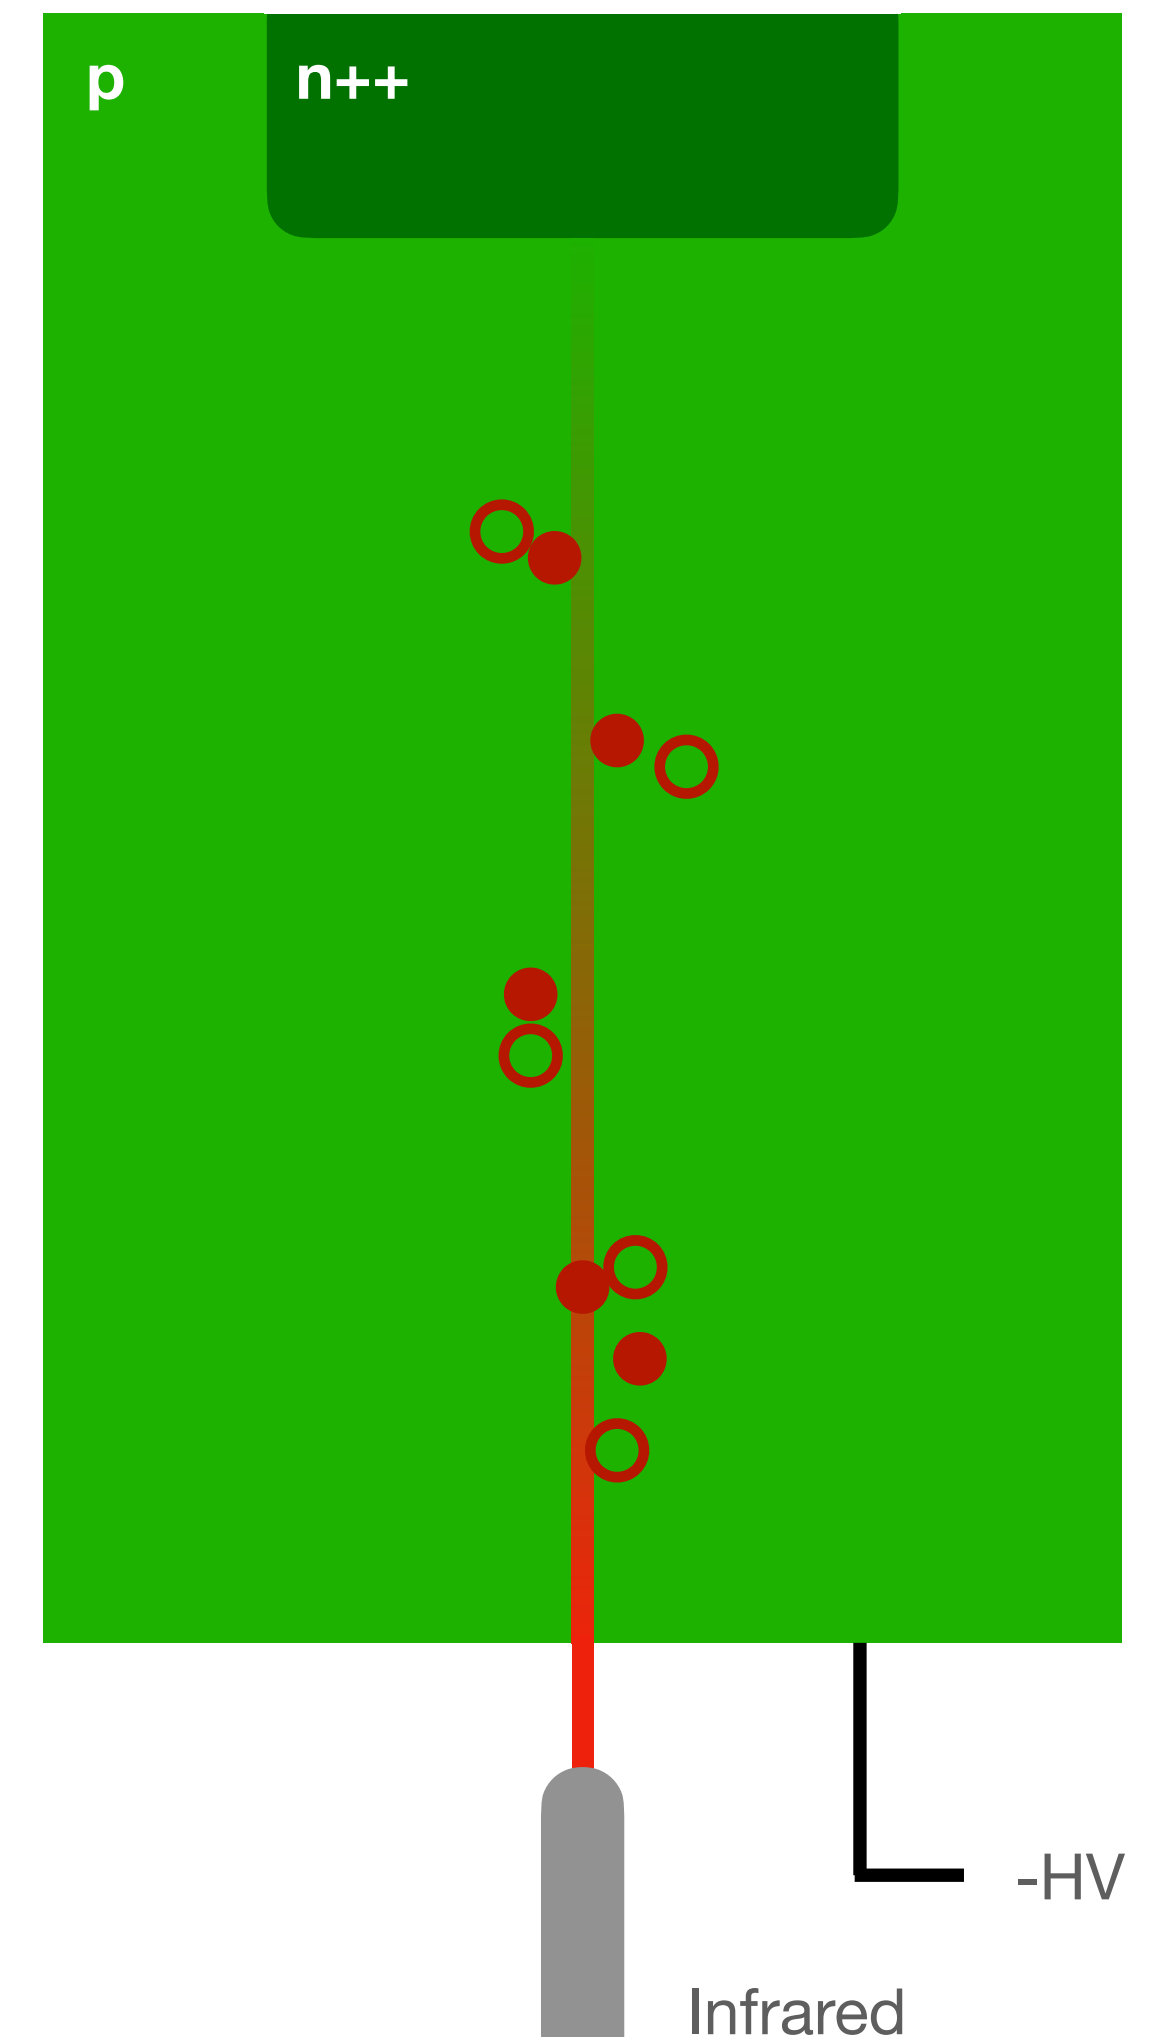

Filling the traps - optically

How do we fill the traps at low energy?


- Using a shorter wavelength laser with limited absorption depth can also be a very useful technique

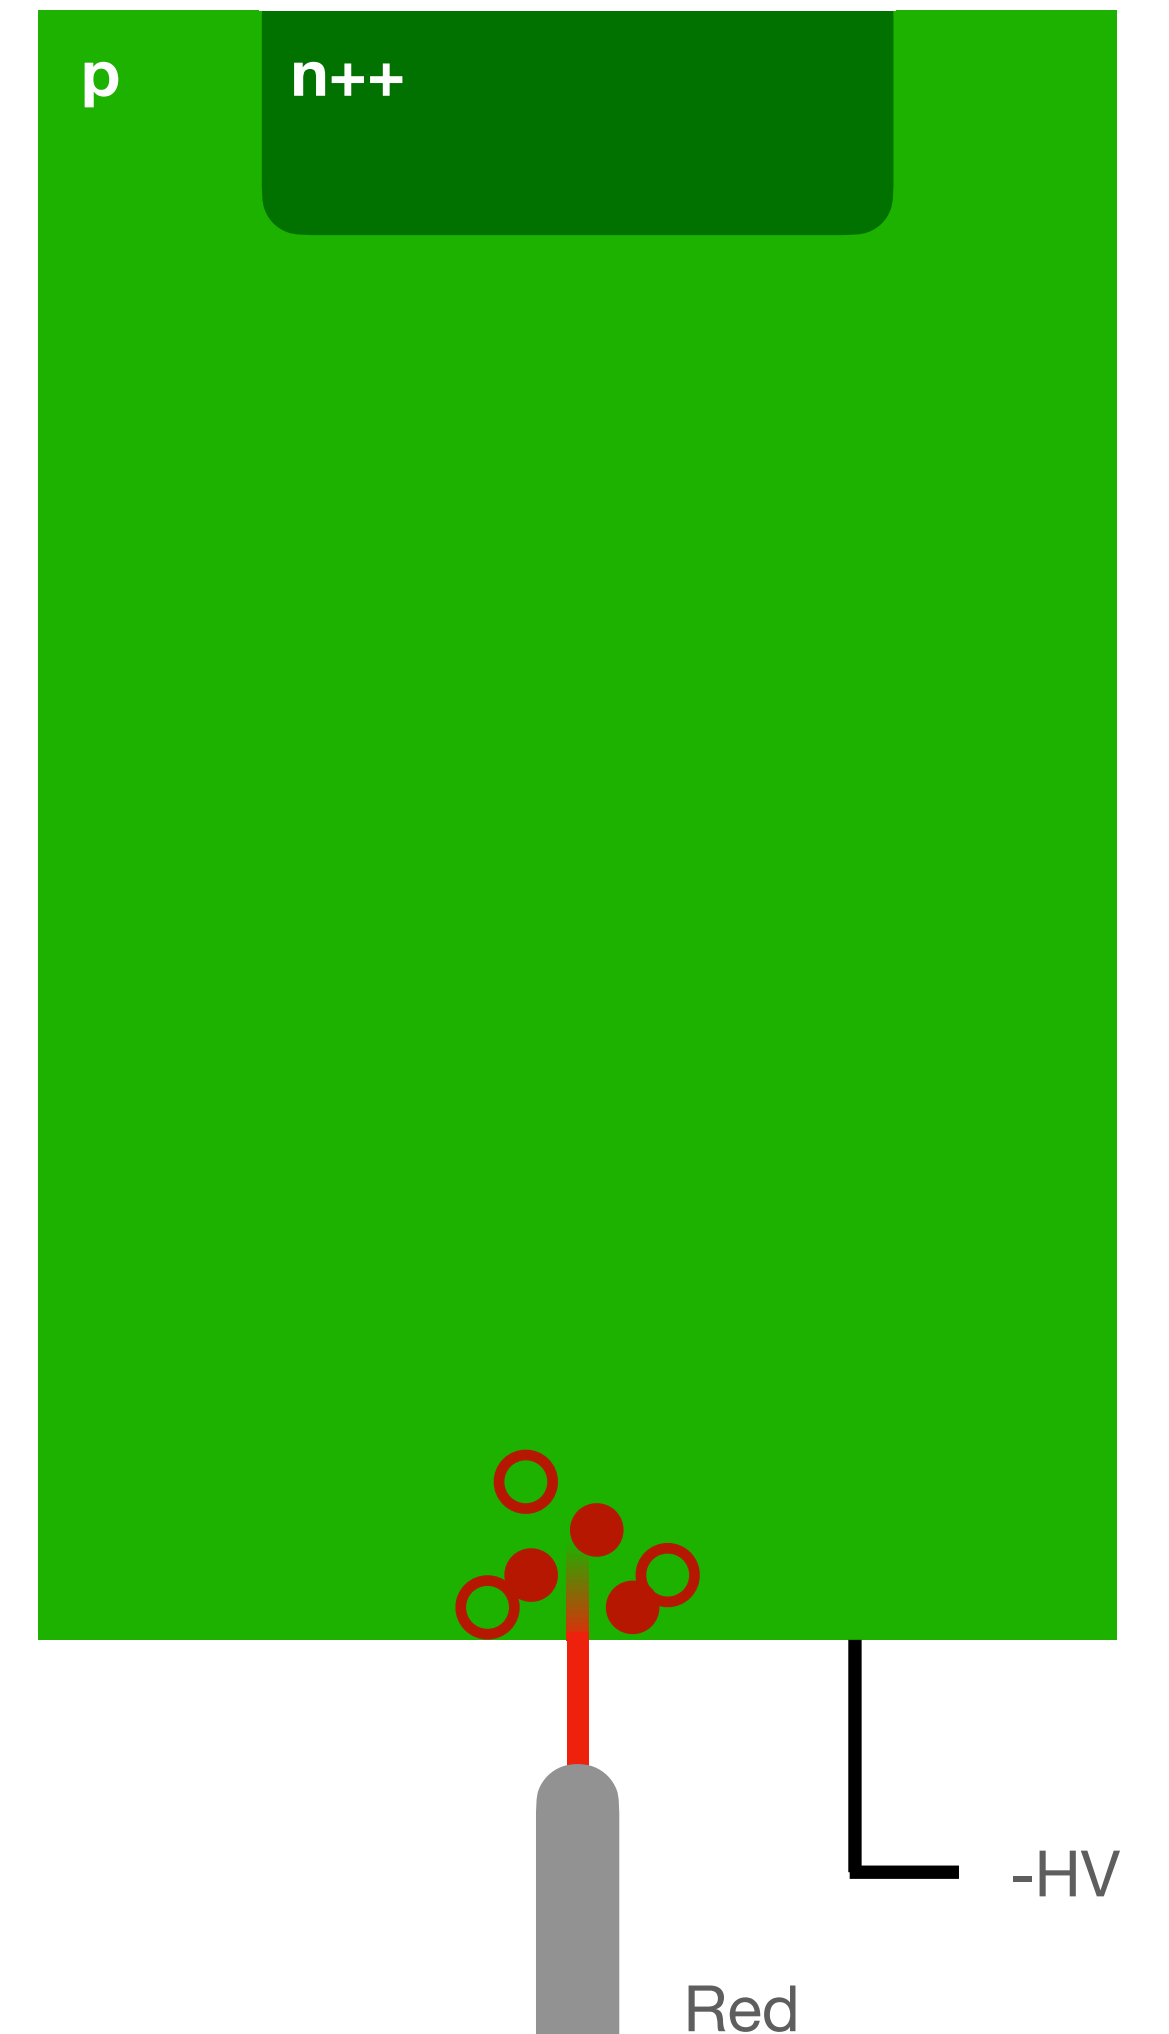

Filling the traps - optically

How do we fill the traps at low energy?


- Using a shorter wavelength laser with limited absorption depth can also be a very useful technique
- Minority/majority carriers are absorbed close to where they are generated, depending on if injection is at the top or bottom of the sensor

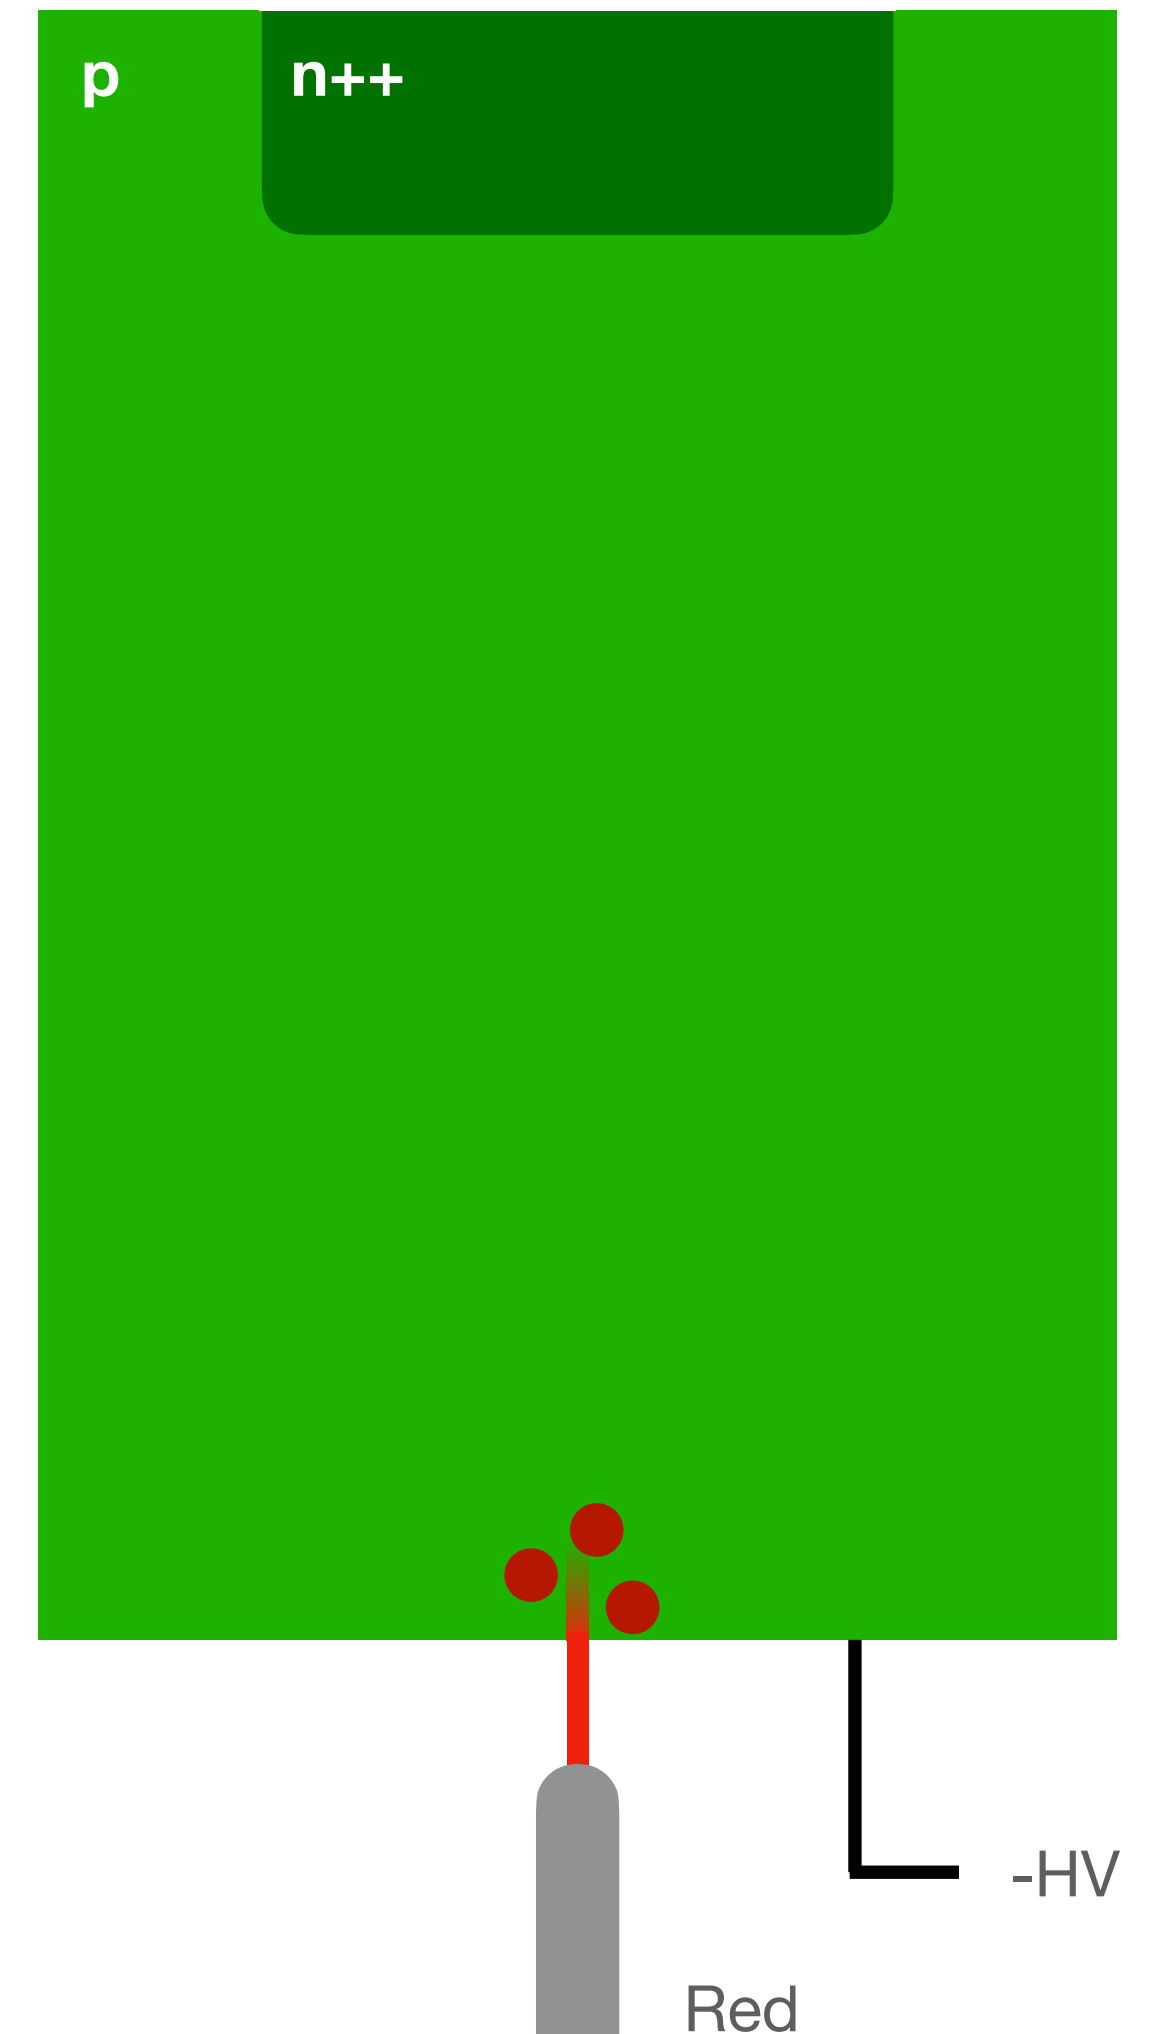

Filling the traps - optically

How do we fill the traps at low energy?


- Using a shorter wavelength laser with limited absorption depth can also be a very useful technique
- Minority/majority carriers are absorbed close to where they are generated, depending on if injection is at the top or bottom of the sensor
- Drifting carriers can then populate just the electron/hole traps

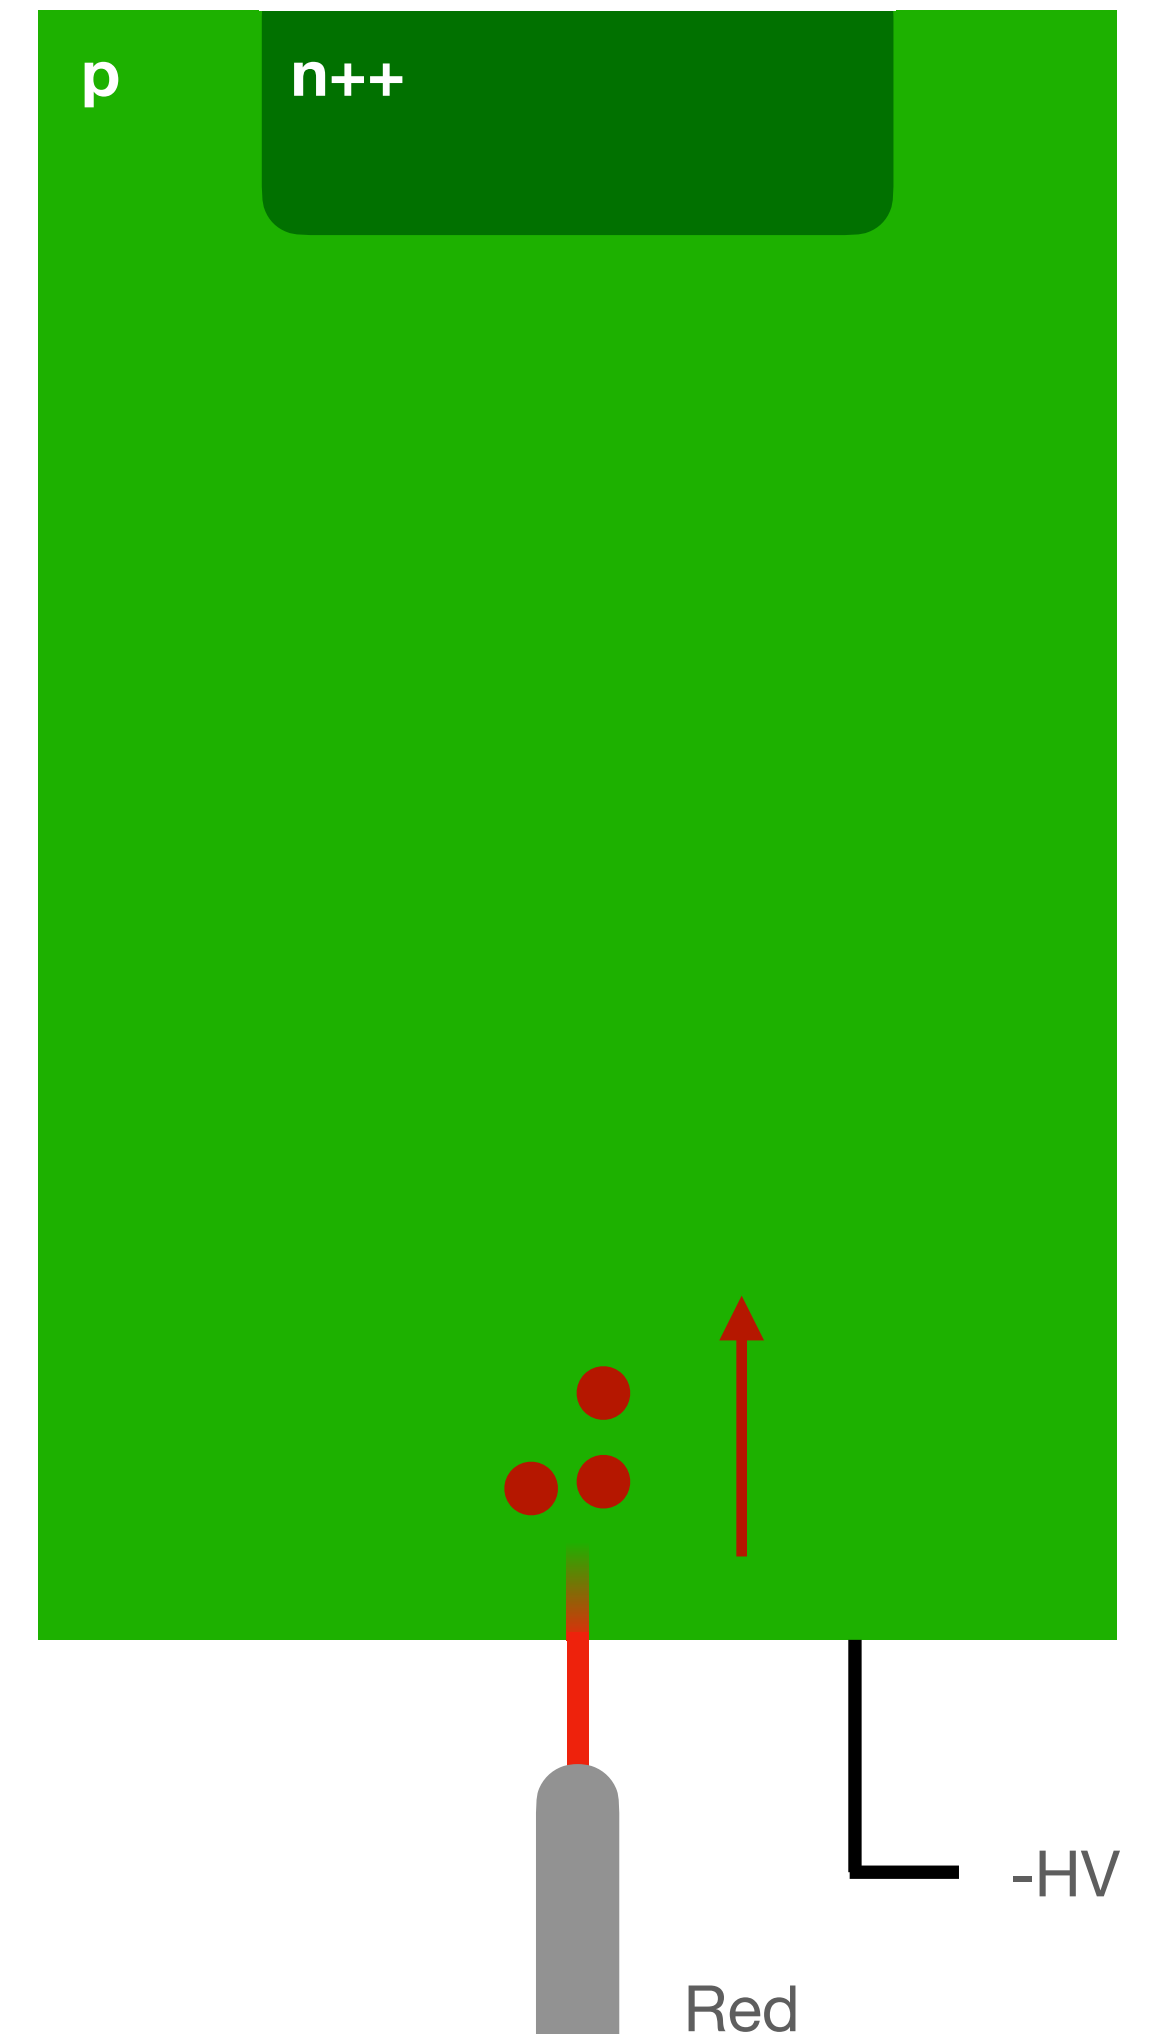

Filling the traps - optically

How do we fill the traps at low energy?


- Using a shorter wavelength laser with limited absorption depth can also be a very useful technique
- Minority/majority carriers are absorbed close to where they are generated, depending on if injection is at the top or bottom of the sensor
- Drifting carriers can then populate just the electron/hole traps
- Be aware that depending on the interaction length of the laser, you may be filling some of the opposing traps!

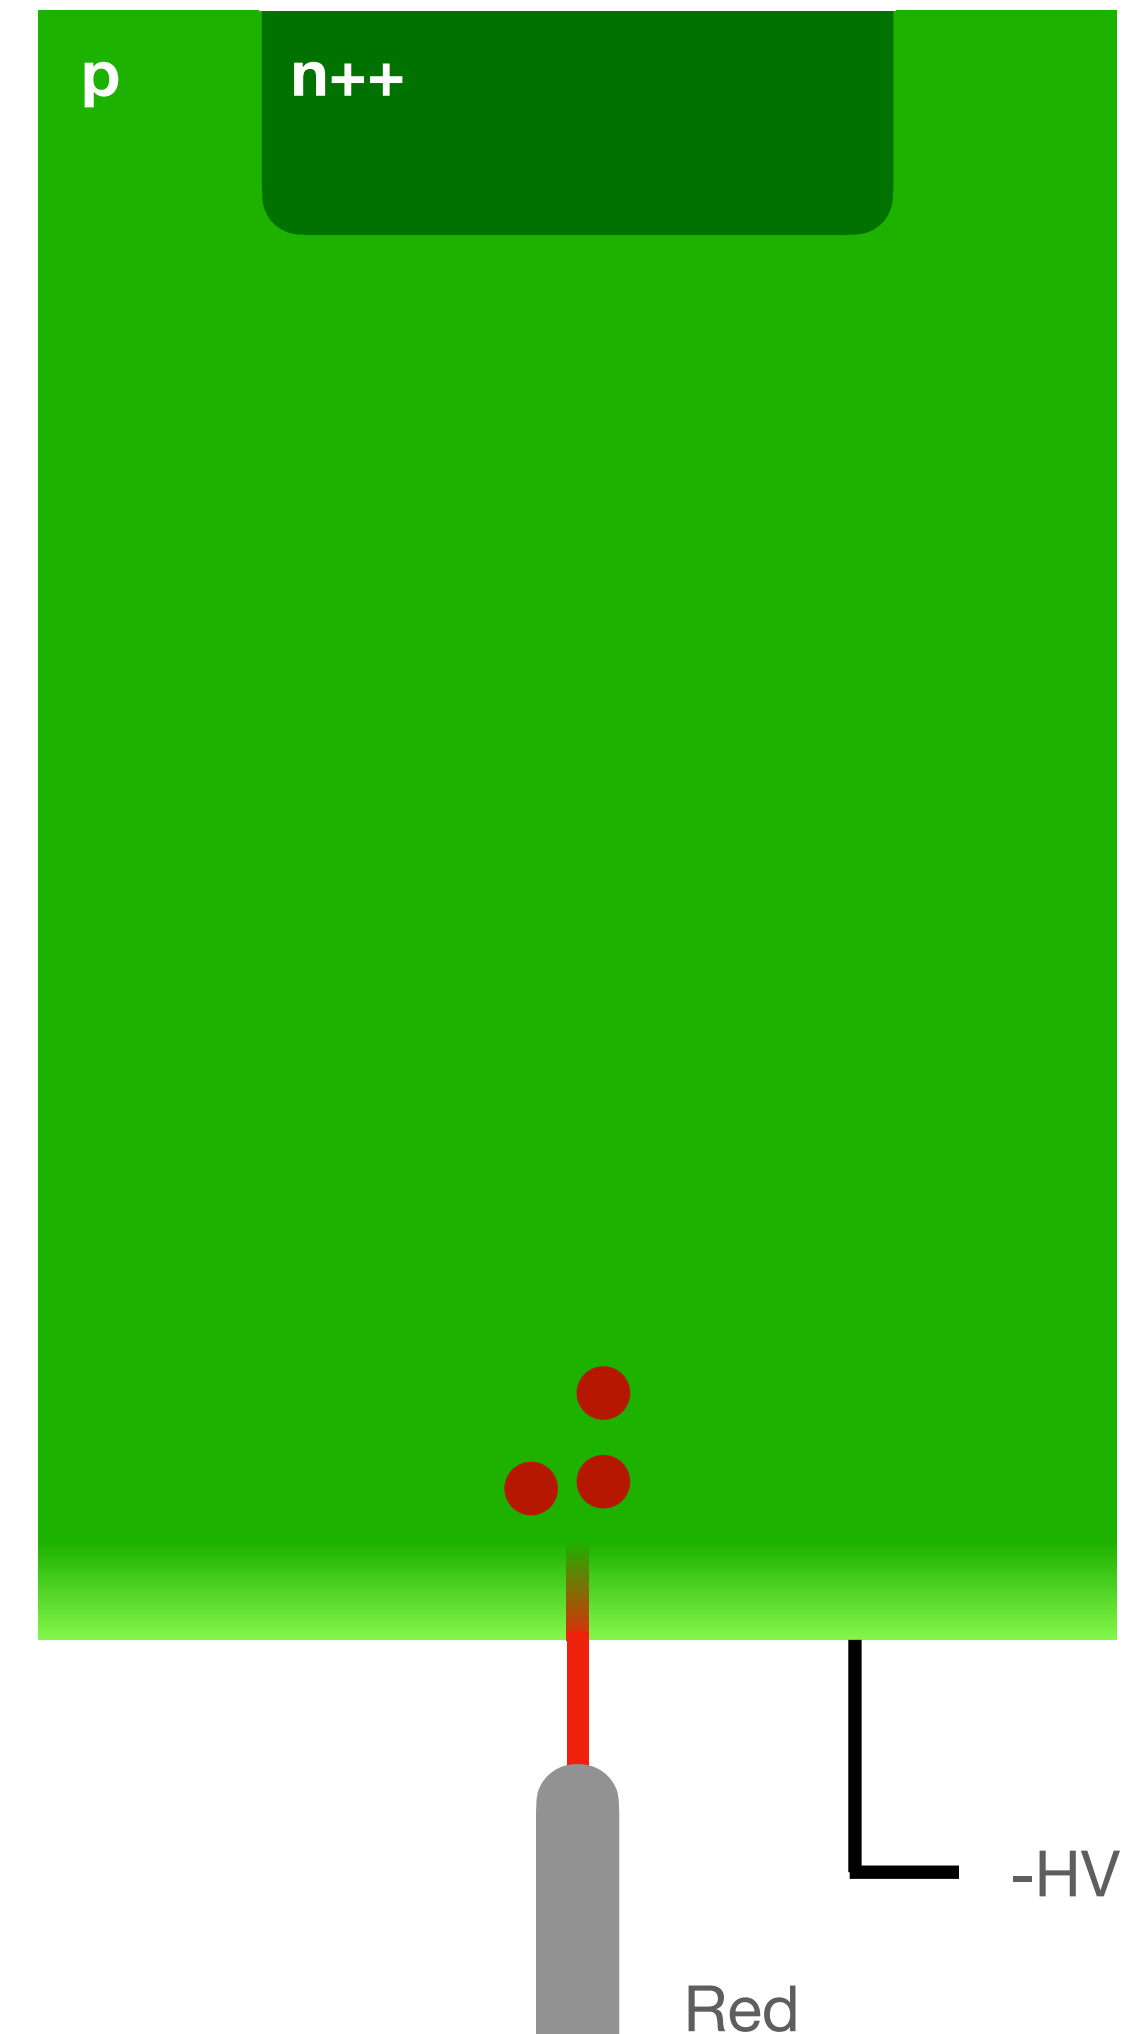

Filling the traps - zero bias

How do we fill the traps at low energy?


- We don't - fill them at high energy!
- If the device has 0 applied field and is cooled down, then the traps will be filled with majority carriers

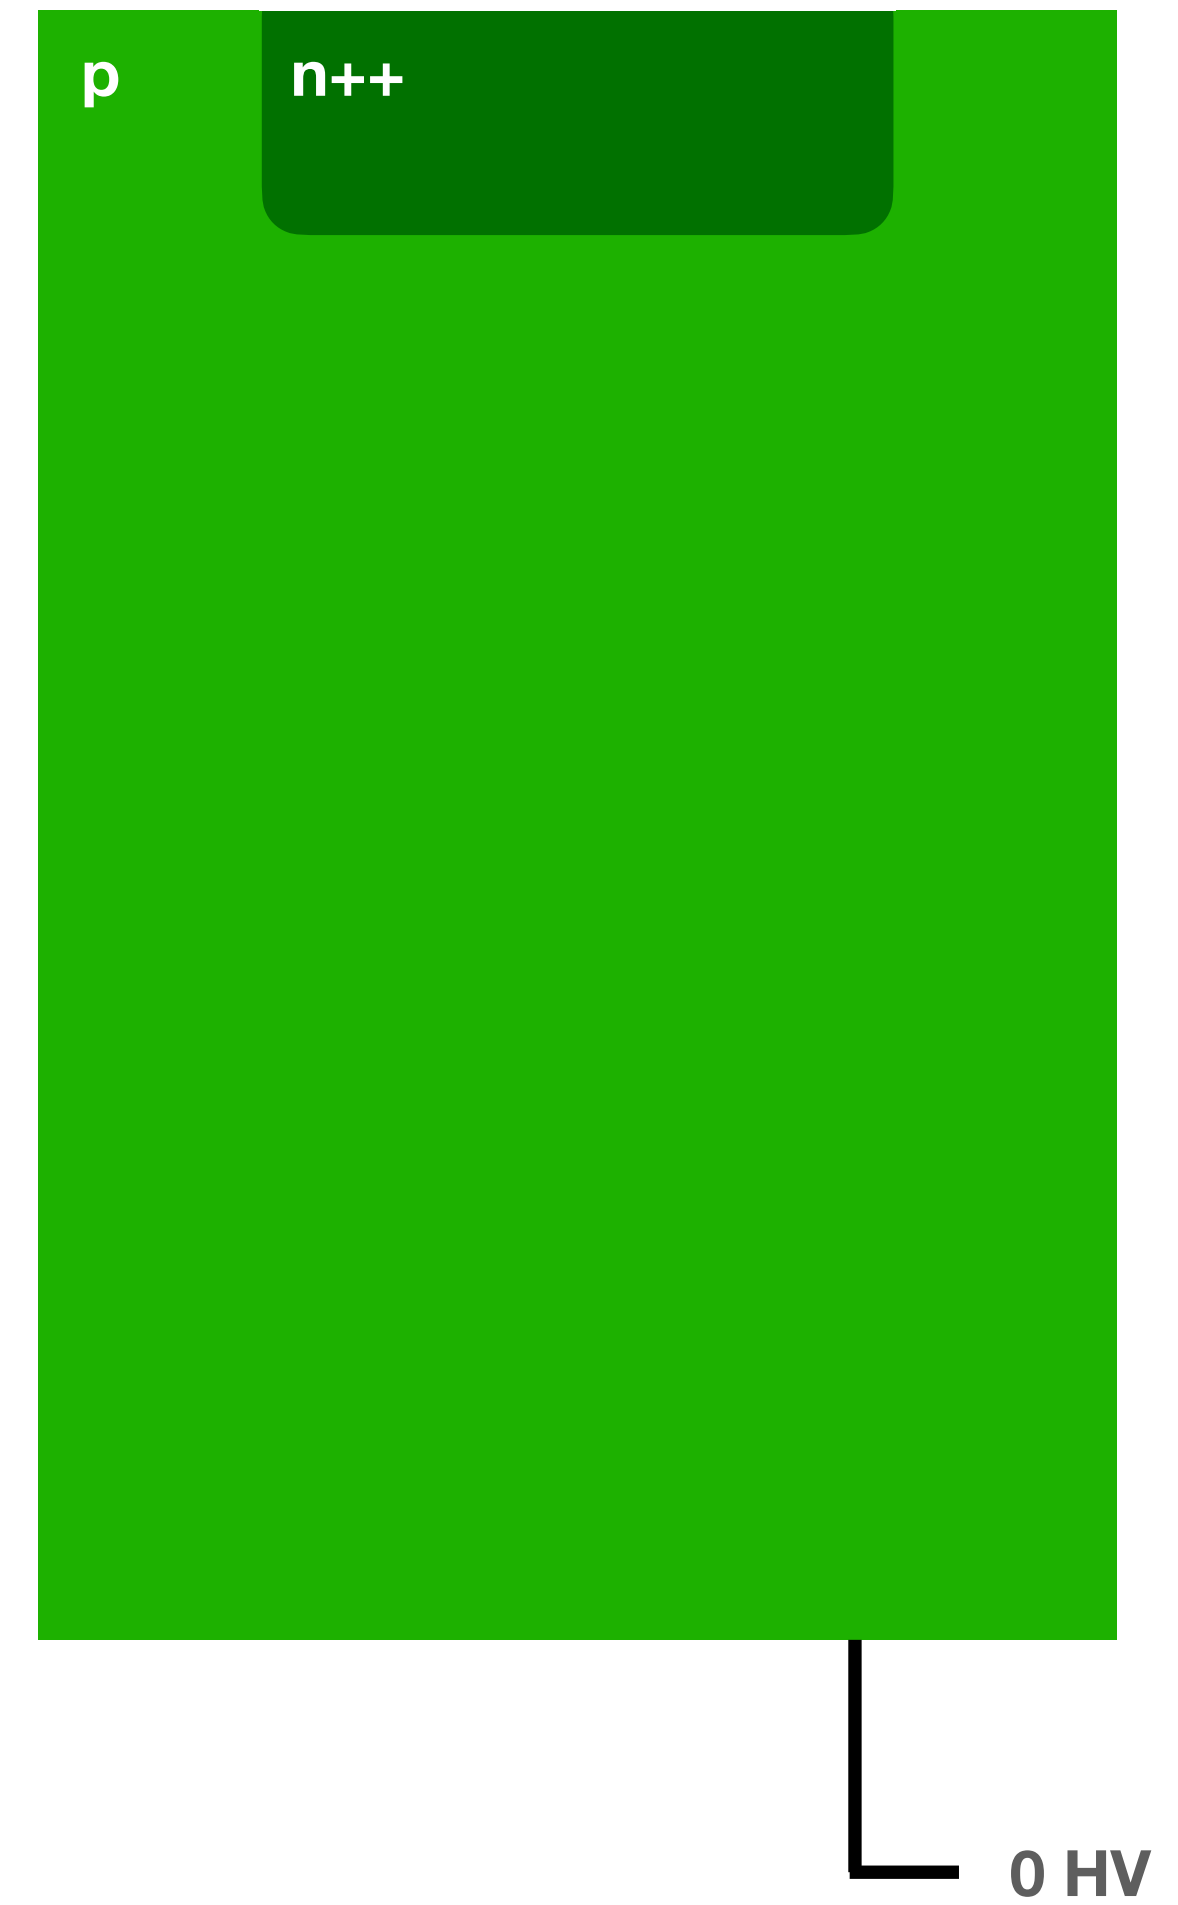

Filling the traps - forward bias


How do we fill the traps at low energy?

- Forward bias the device!
- Carriers of both type will be injected through the sensor and occupy traps
- This has the same issue as penetrating laser illumination - defects that act as both donors and acceptors will be partially filled depending on their relative cross-sections for holes and electrons

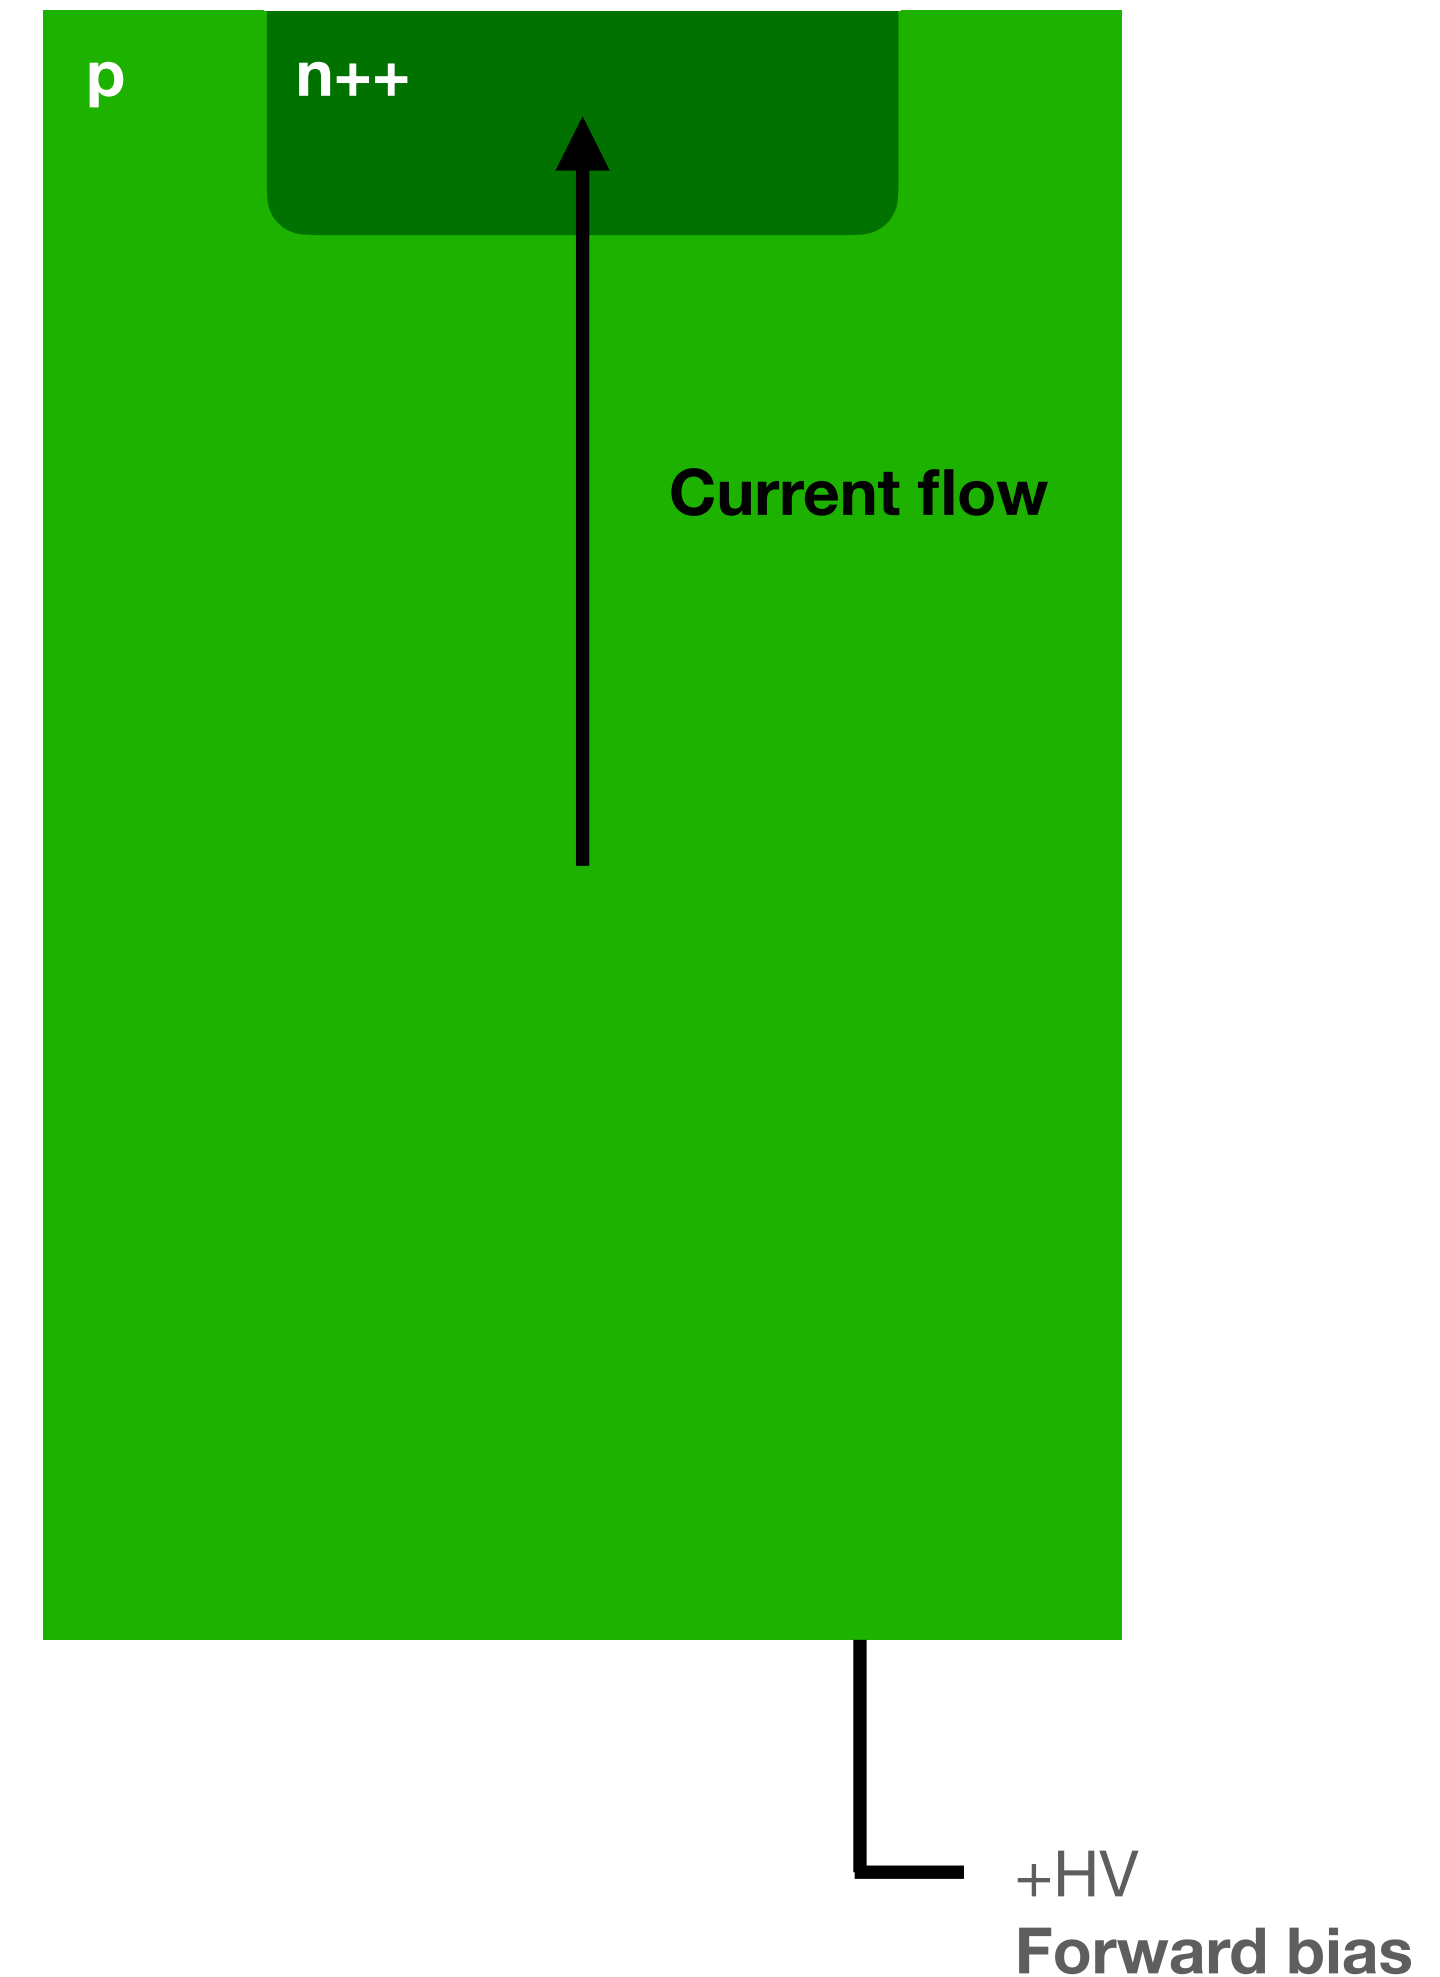

What does the TSC setup look like in reality?

- “Simply” a controlled temperature chuck with contacts for connecting the sensor
- A hole for laser light injection (in the case of optical trap filling)
- Lots of low-noise electronics and isolation

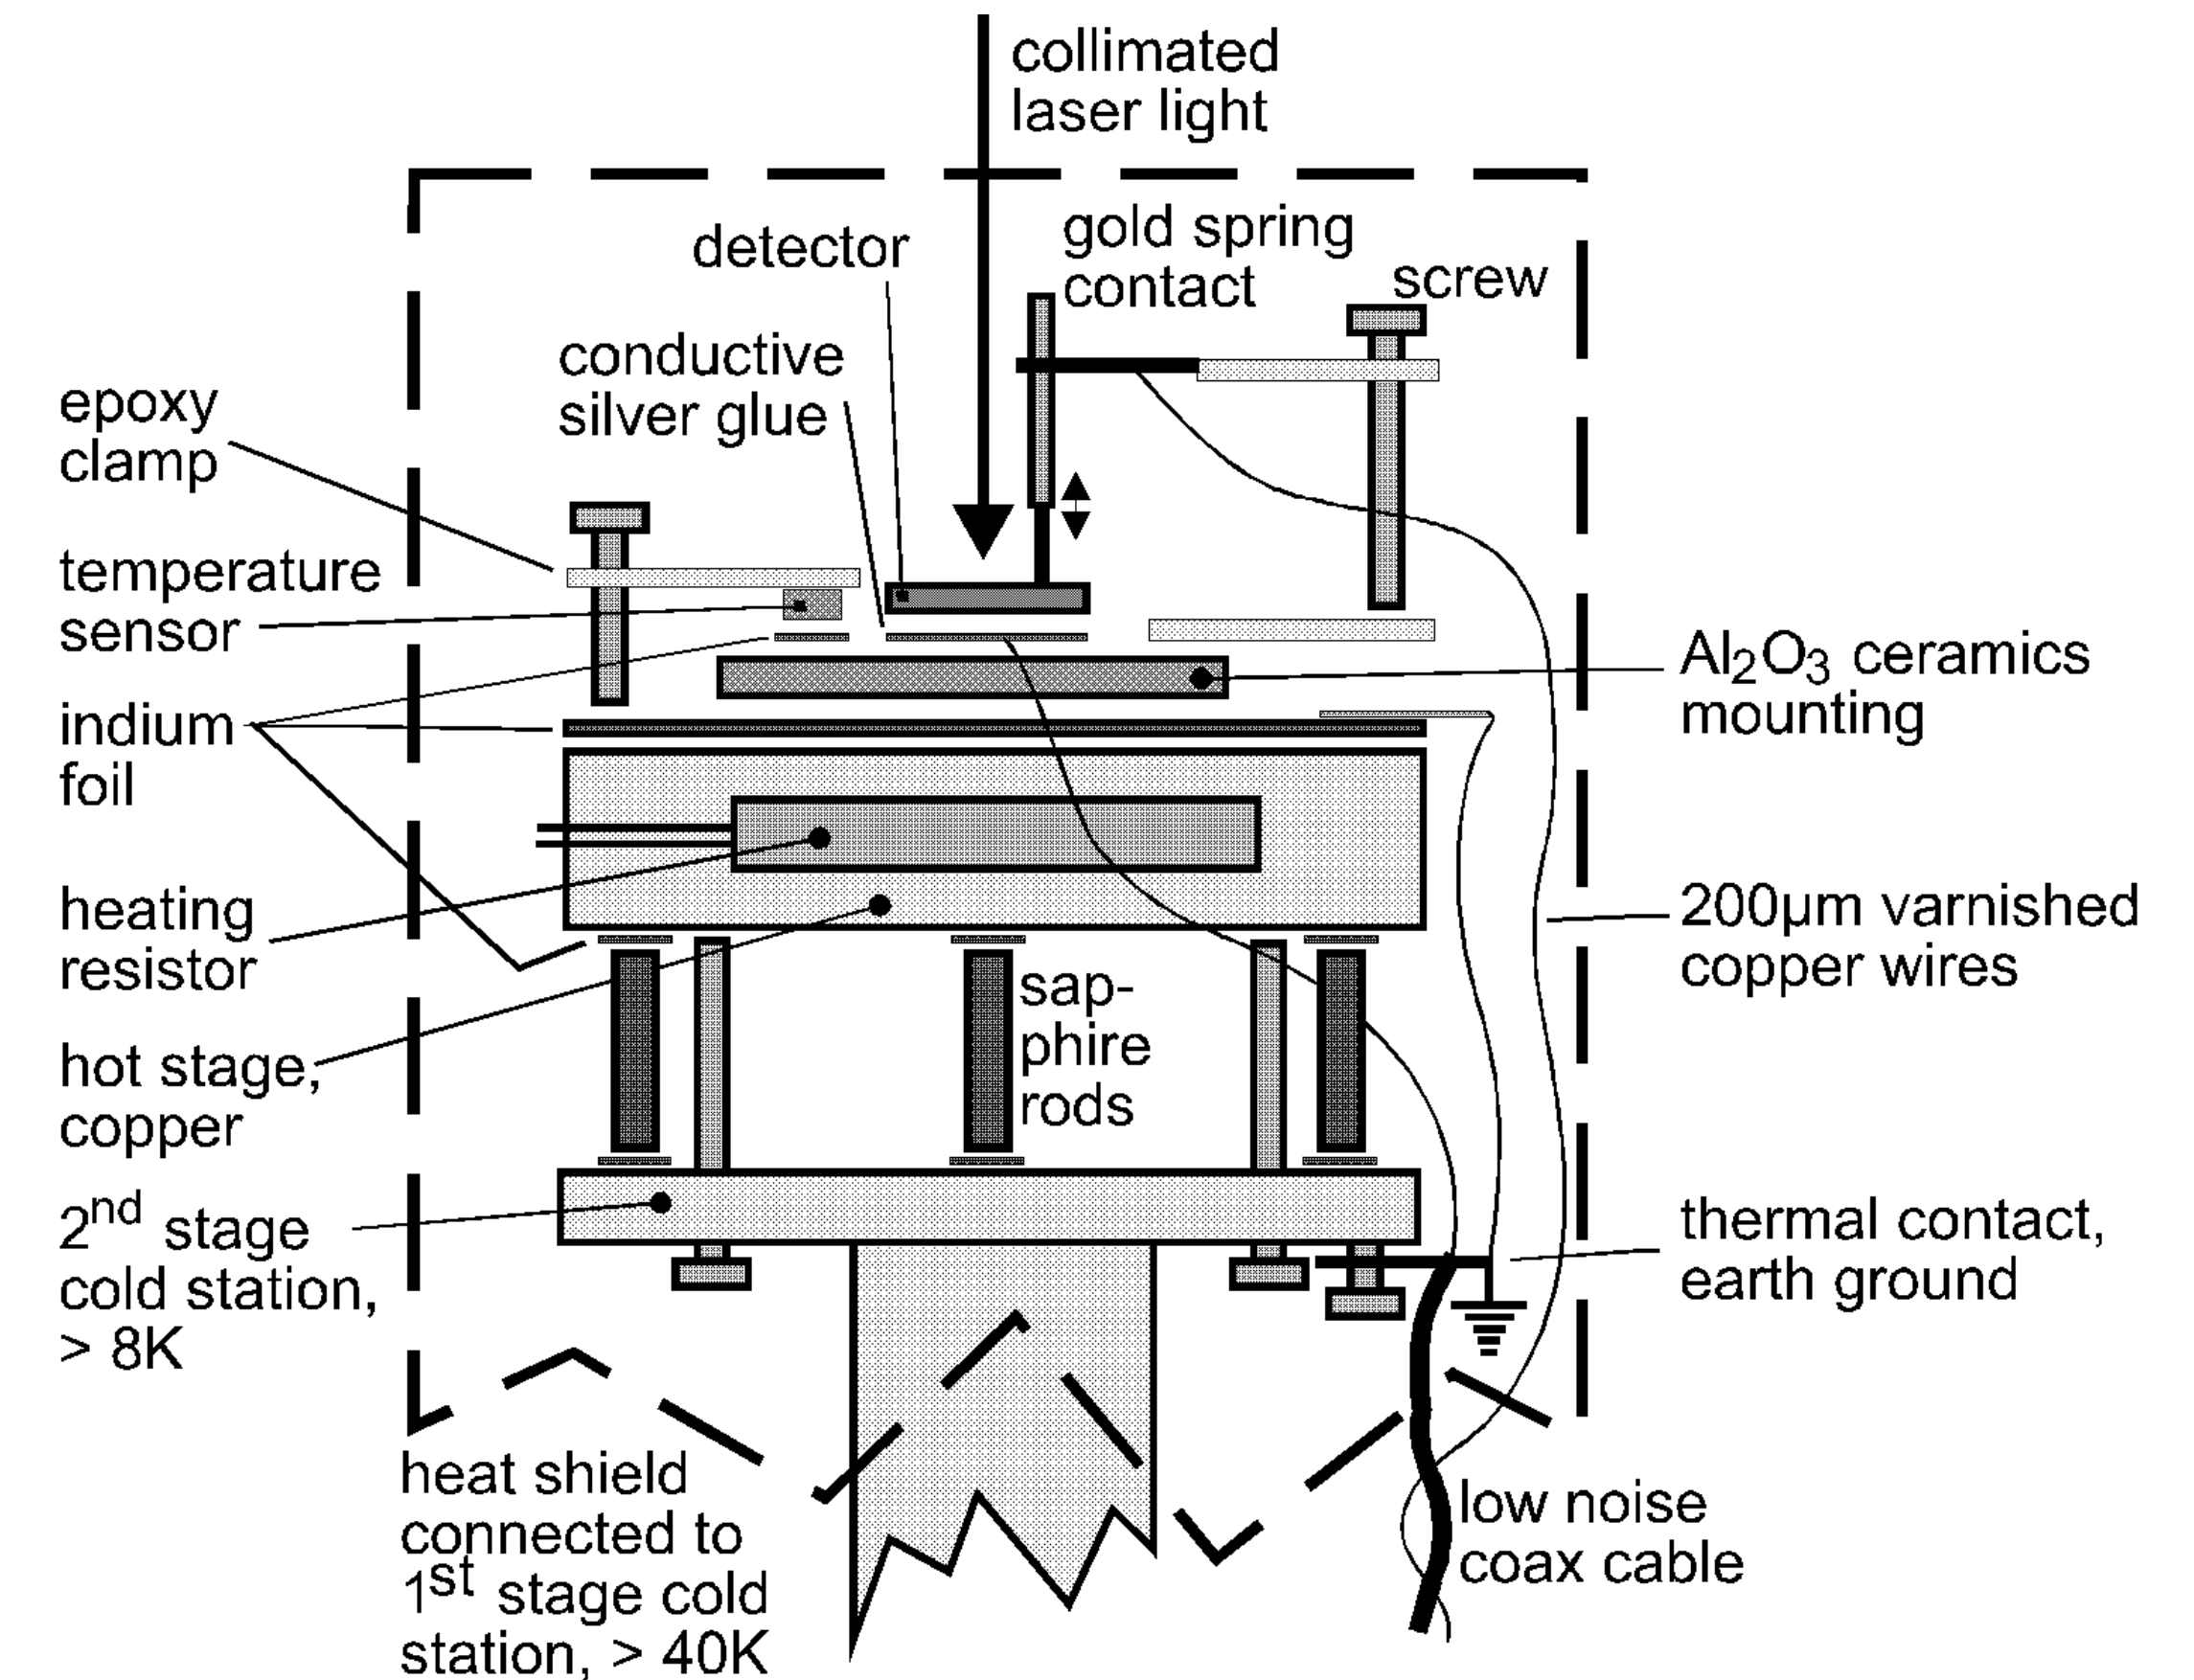


TSC/DLTS in the flesh

F.Hönniger, PhD thesis, 2007

What does the TSC setup look like in reality?

- “Simply” a controlled temperature chuck with contacts for connecting the sensor
- A hole for laser light injection (in the case of optical trap filling)
- Lots of low-noise electronics and isolation

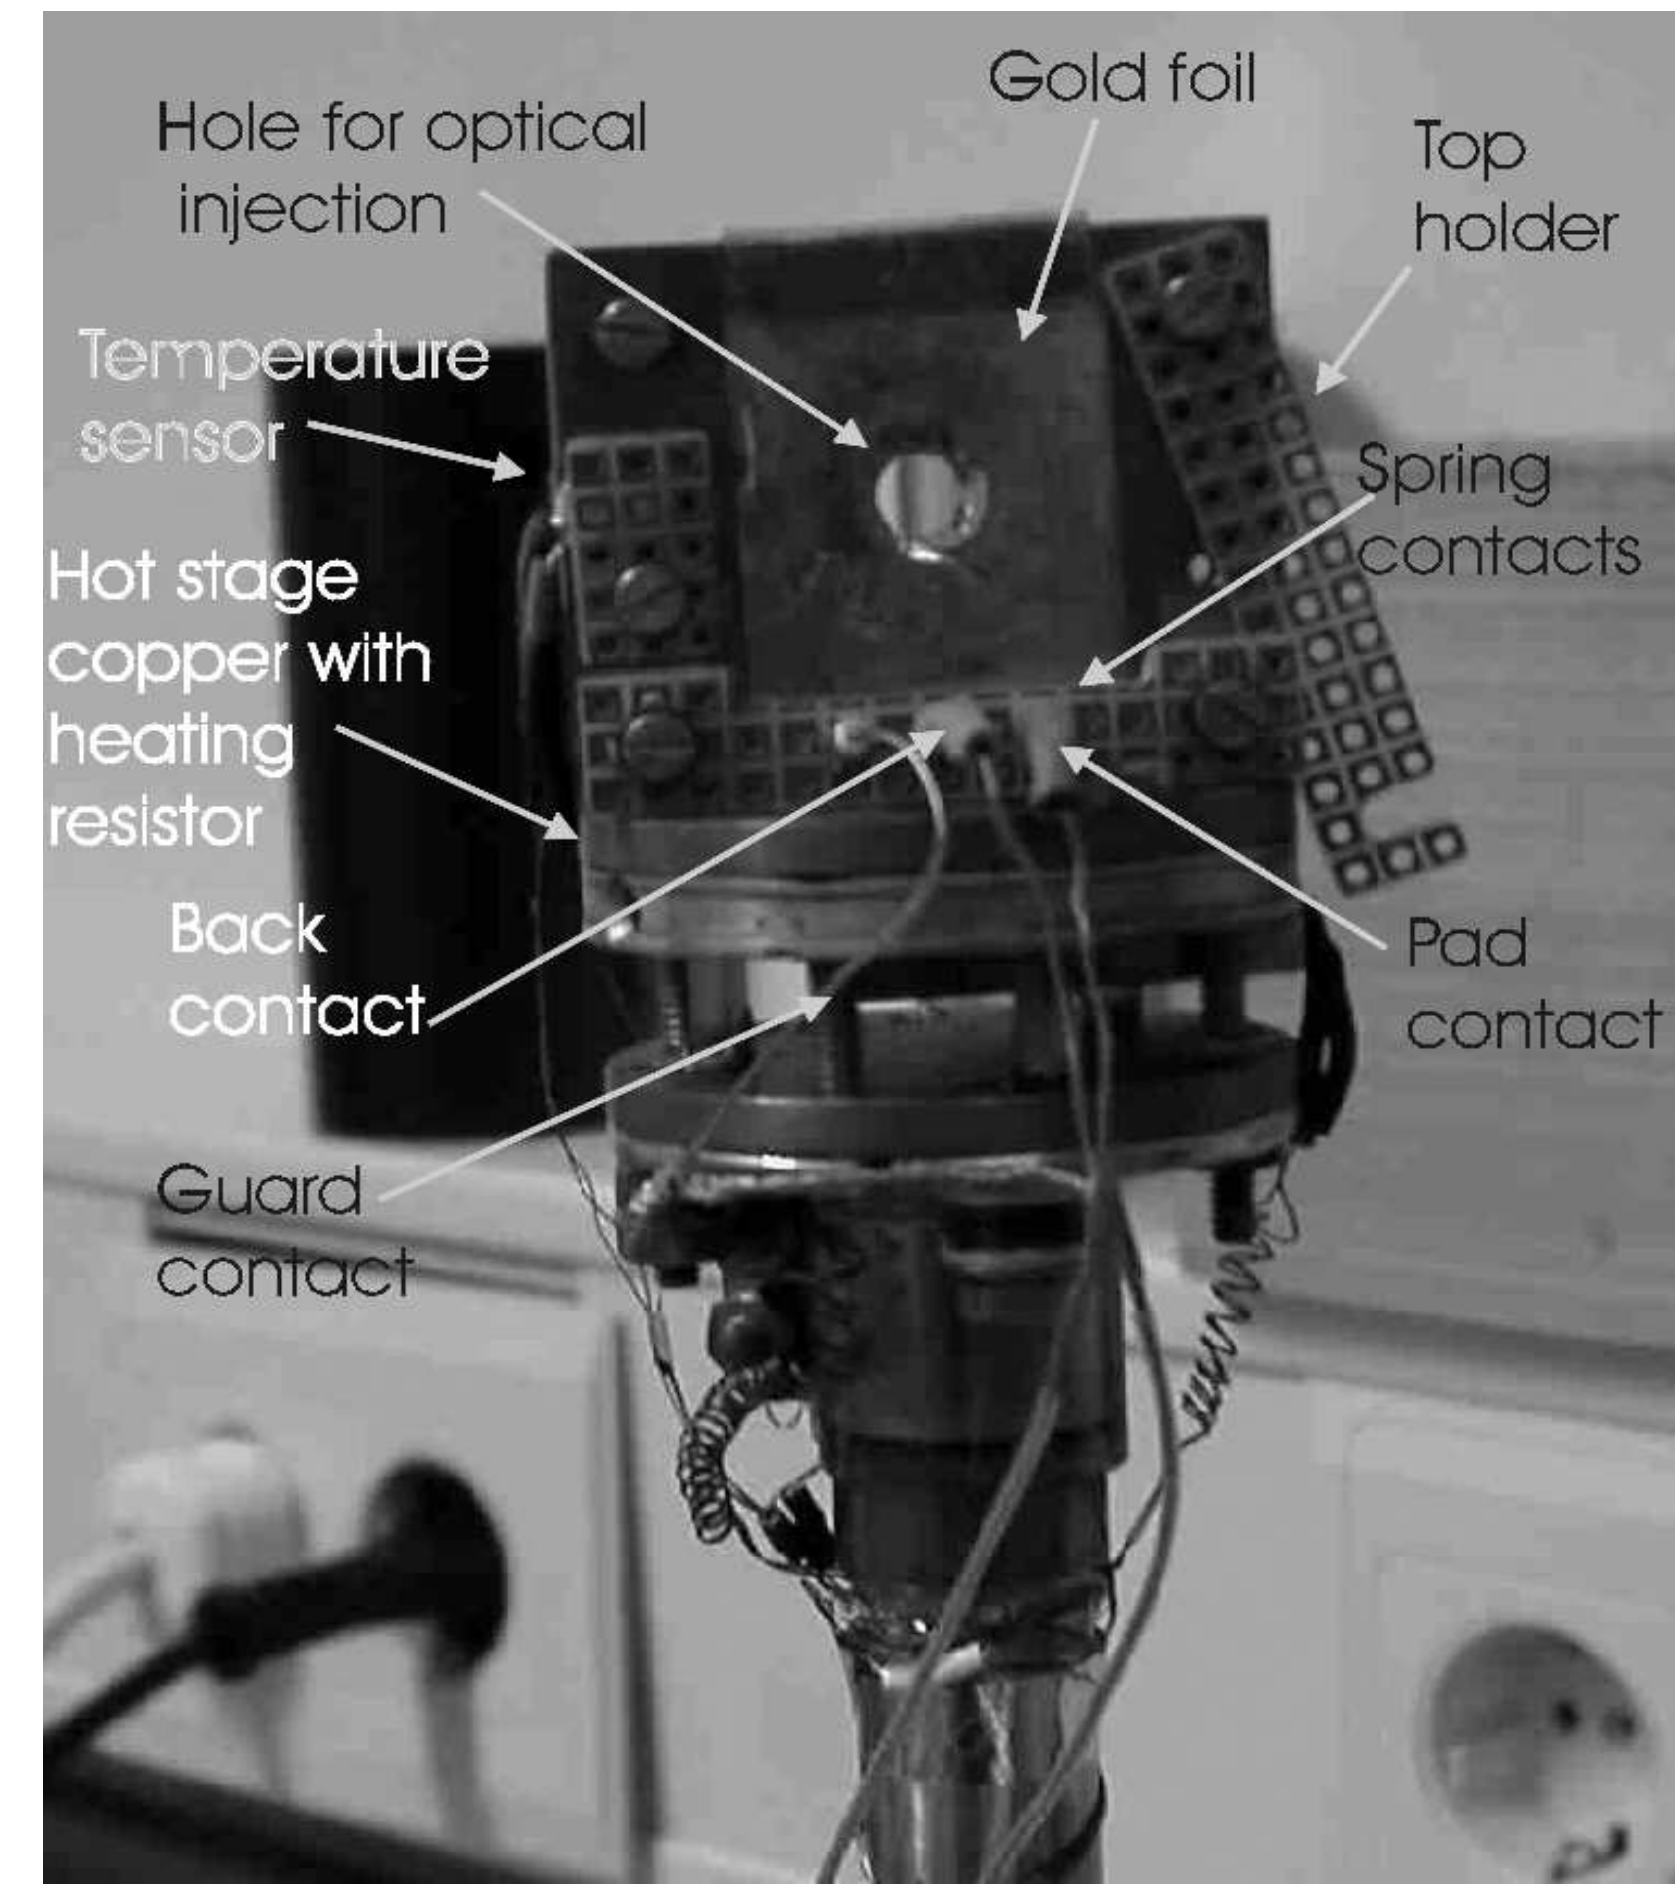


Typical TSC measurement

M.Moll, PhD thesis, 1999

Thesis from M.Moll is well worth reading (in general) - huge amount of detail on radiation damage and measurements of different defects

- Plot on the right shows a typical TSC measurement on an irradiated diode
- Sample was cooled with no bias voltage applied, so only electron traps are probed (n-type bulk material)
- **Shallow (phosphorous) bulk donor has higher concentration than electron traps for this fluence => all traps are occupied**

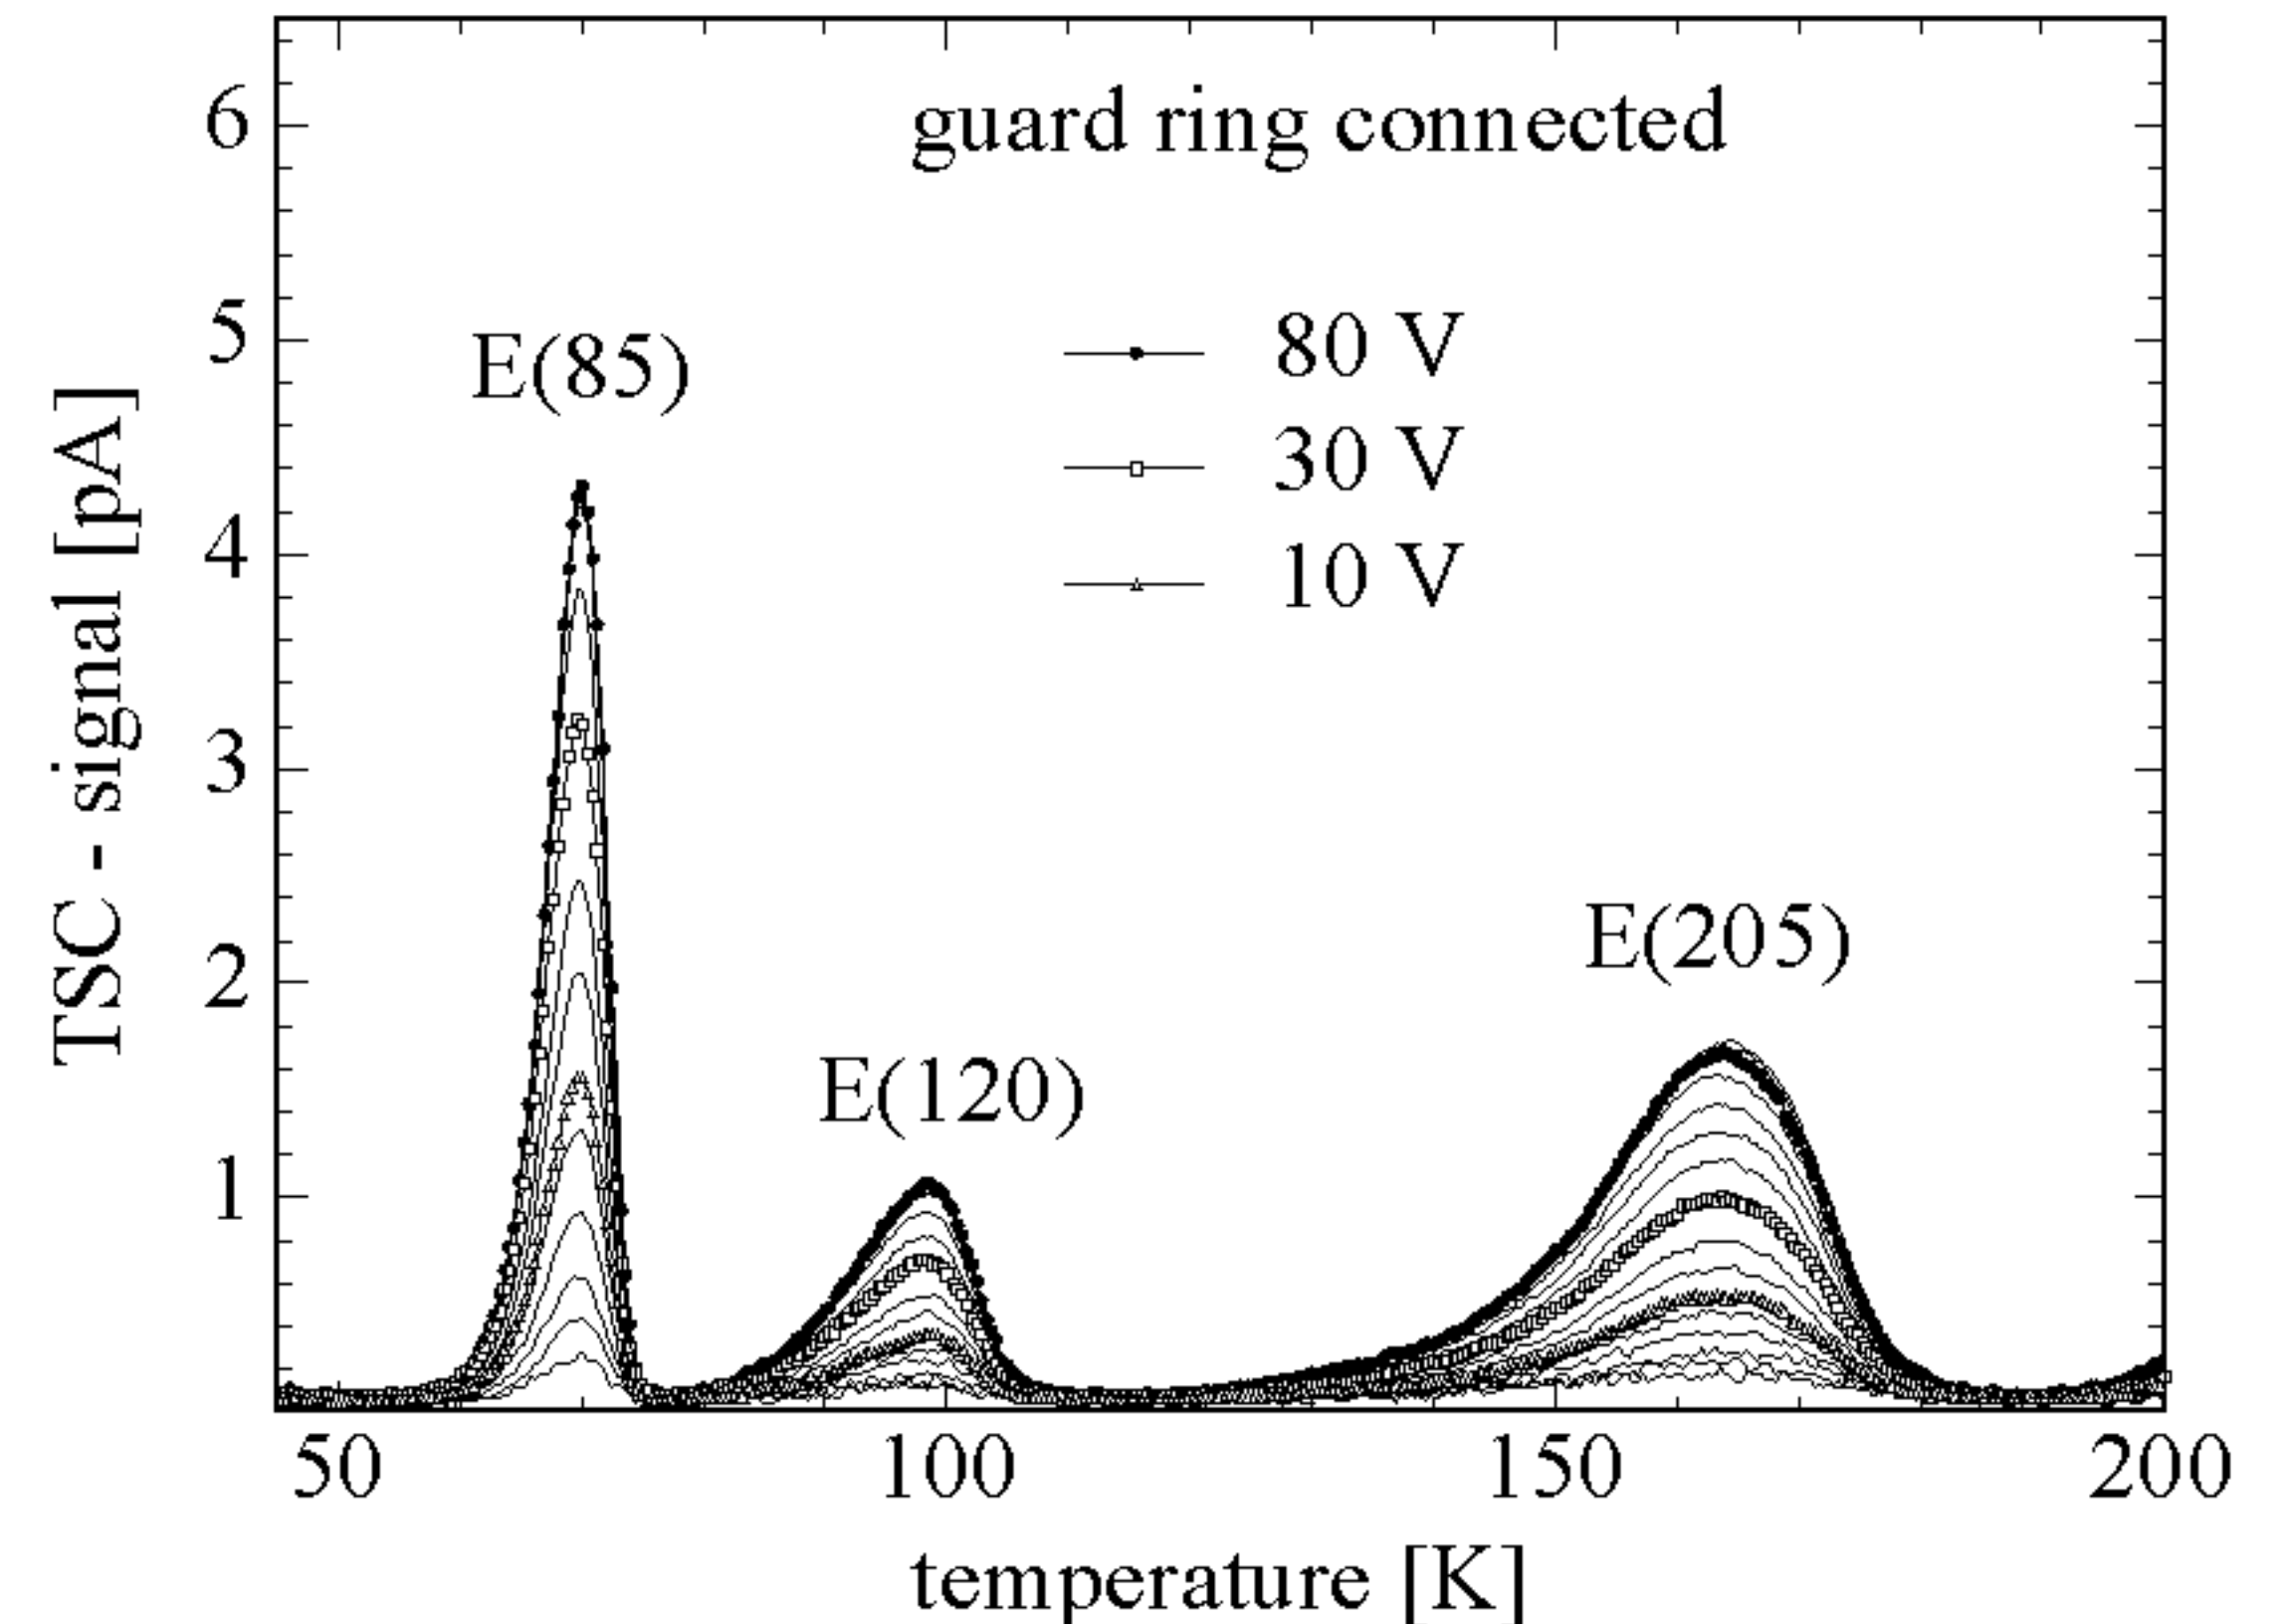

TSC - delayed heating


The peak temperature is not a terribly precise way to extract the activation energy of the traps - can instead perform measurements at different times and temperatures to extract true activation energy

TSC - delayed heating

M.Moll, PhD thesis, 1999

The peak temperature is not a terribly precise way to extract the activation energy of the traps - can instead perform measurements at different times and temperatures to extract true activation energy

- For a single filling temperature, perform measurements after different delays

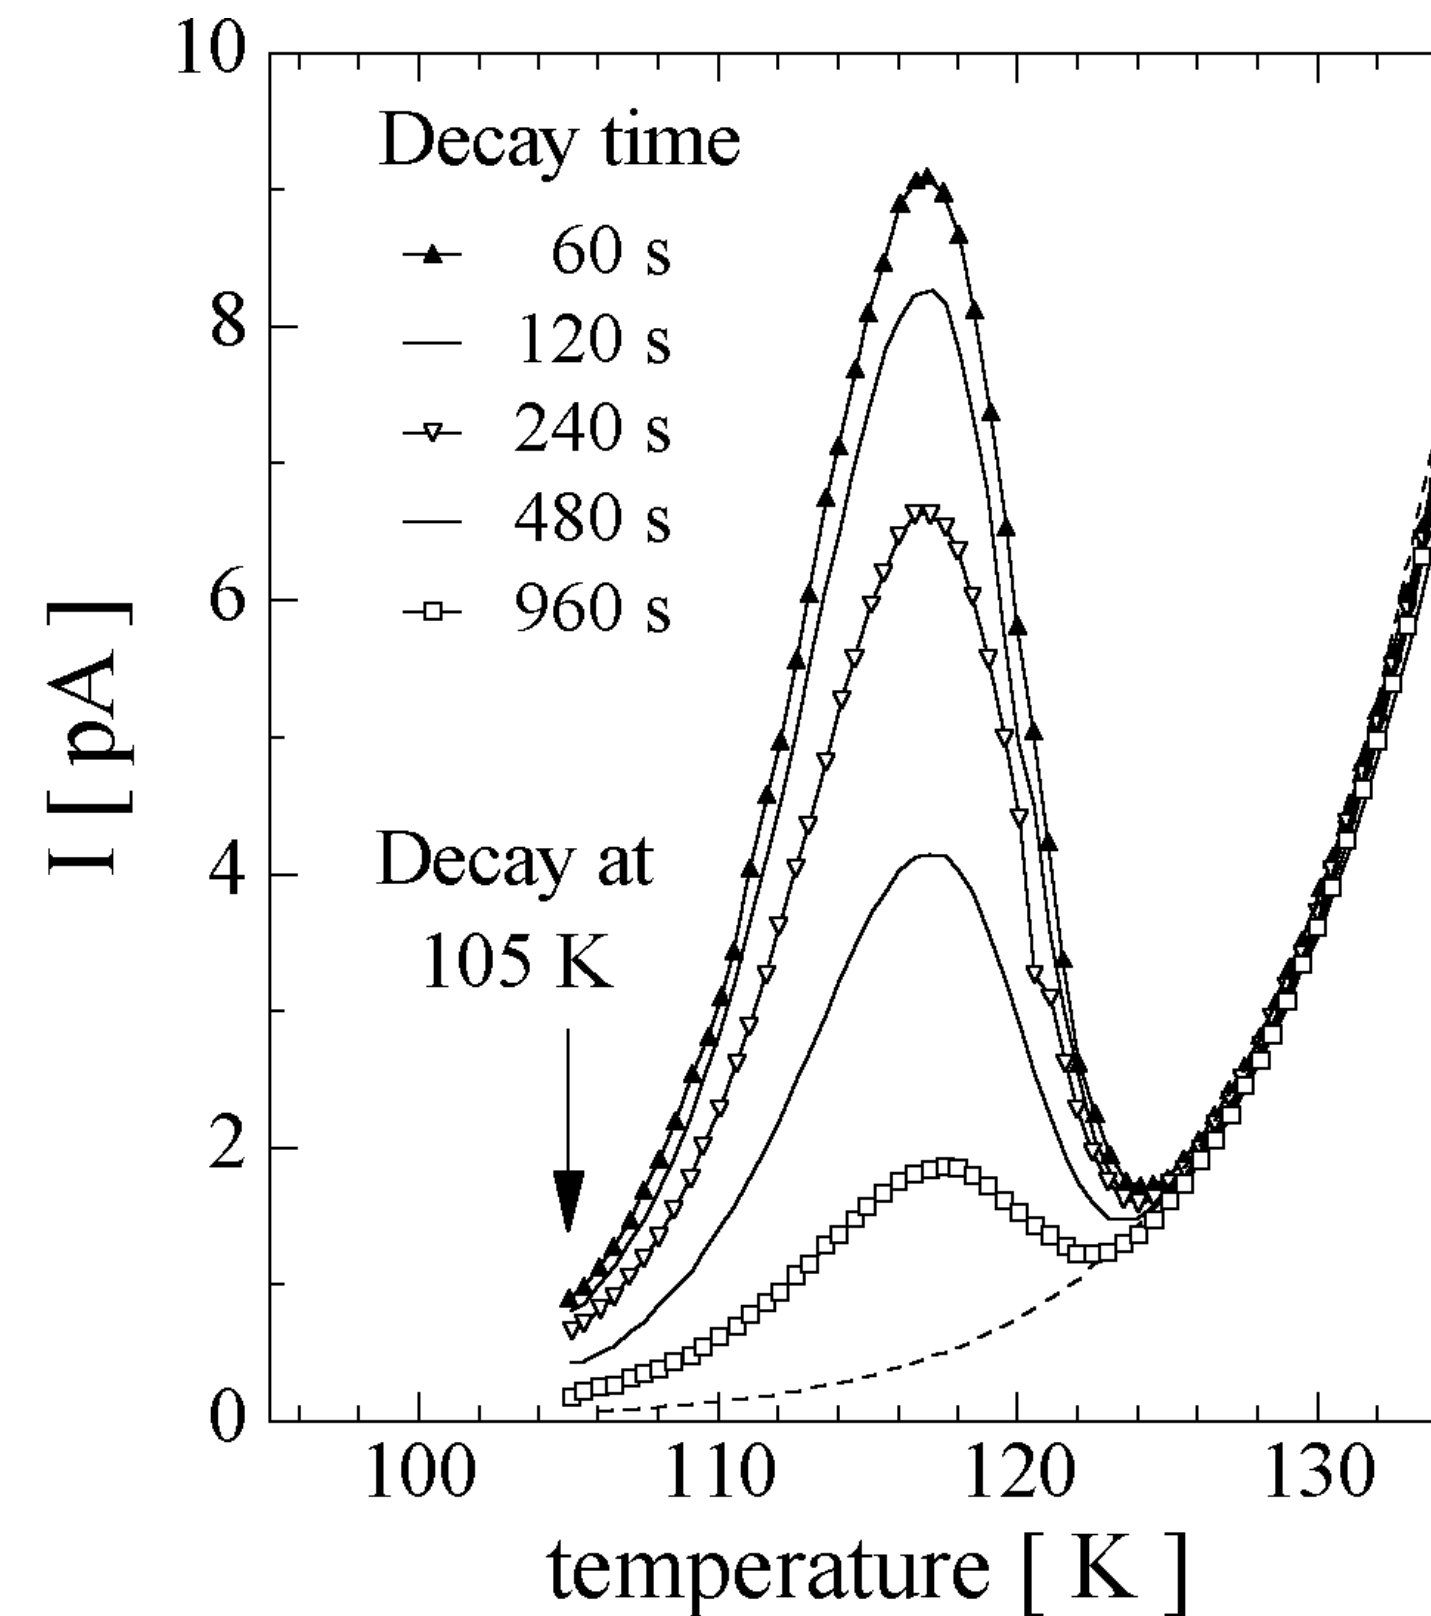

TSC - delayed heating


M.Moll, PhD thesis, 1999

The peak temperature is not a terribly precise way to extract the activation energy of the traps - can instead perform measurements at different times and temperatures to extract true activation energy

- For a single filling temperature, perform measurements after different delays

$$N = N_0 e^{-k_T t}$$

$$N = N_0 e^{-\frac{t}{\tau_e}}$$

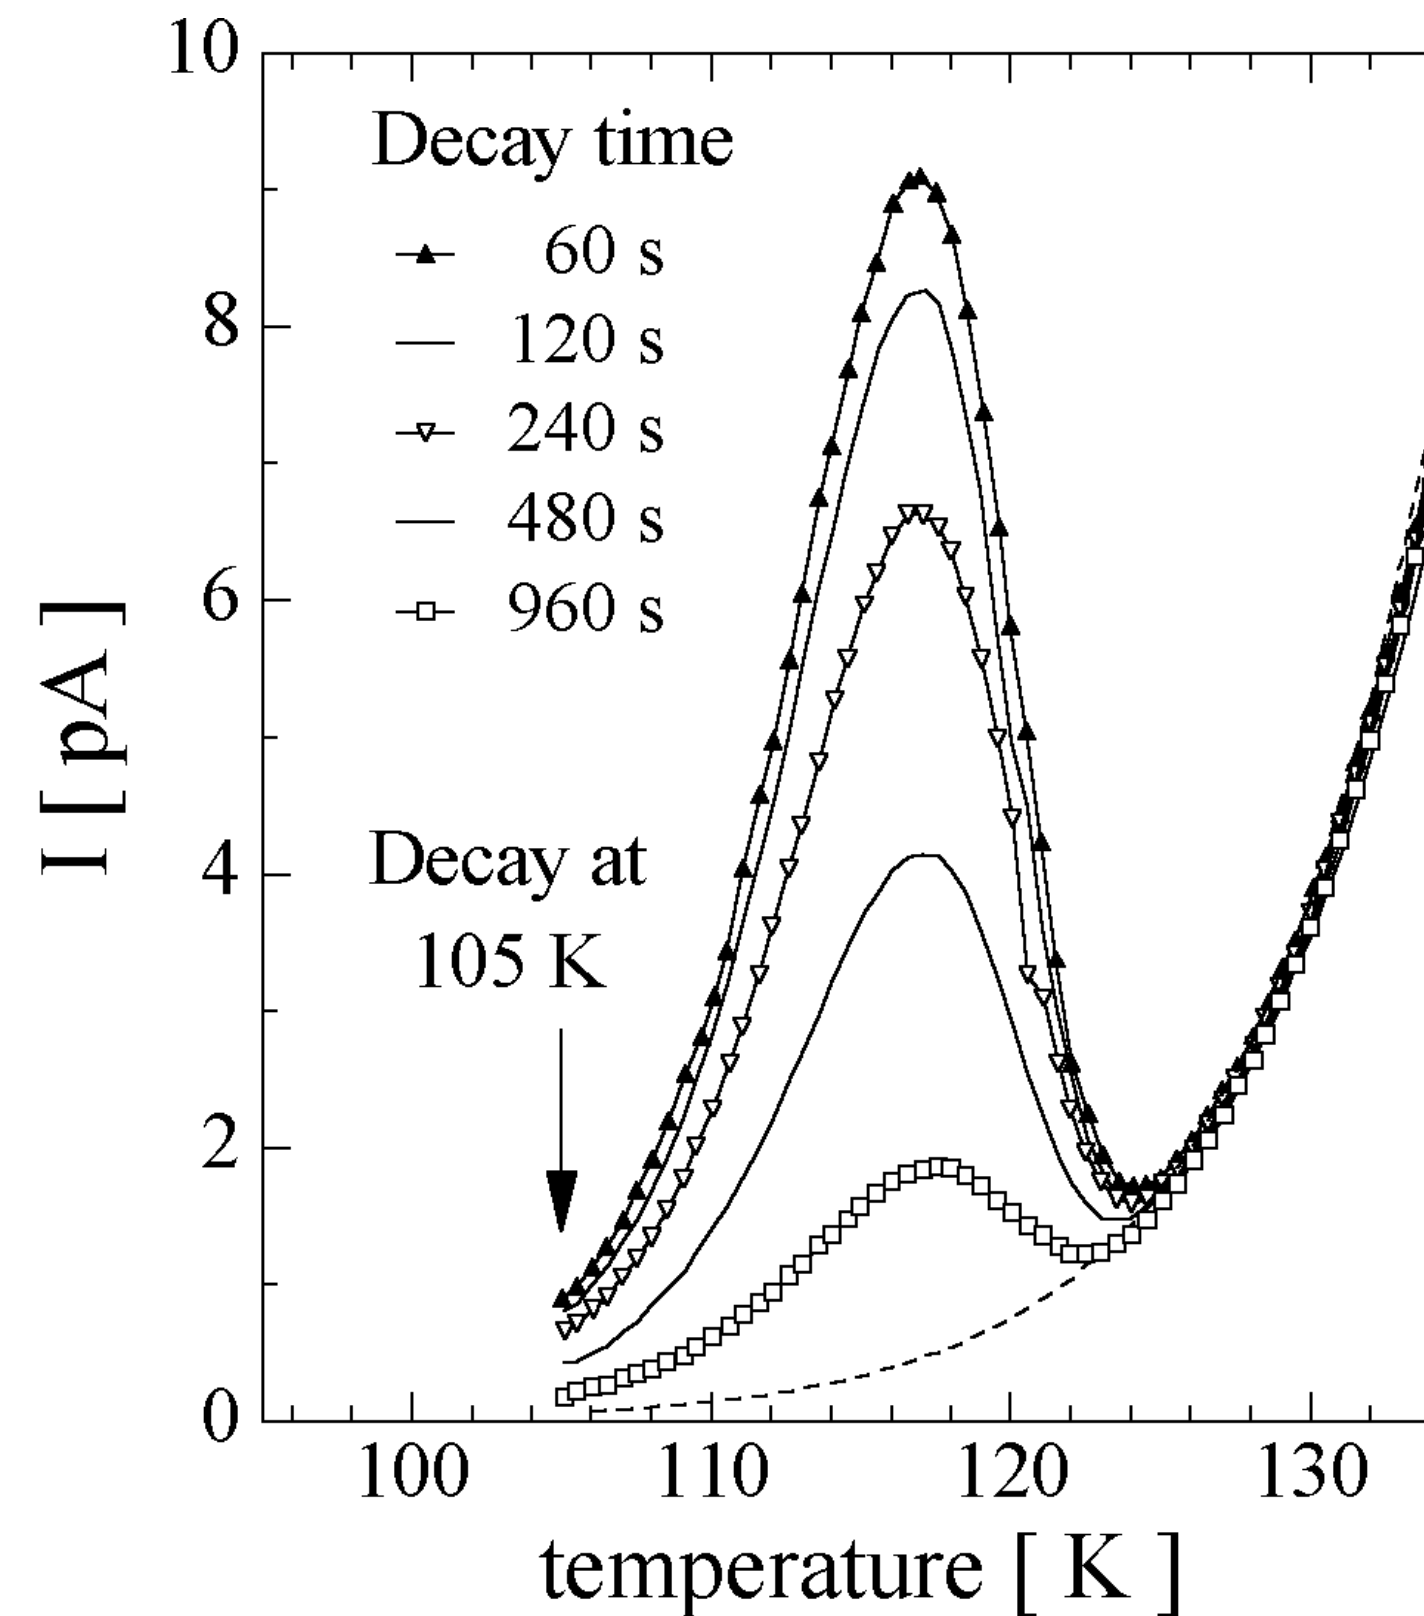


The peak temperature is not a terribly precise way to extract the activation energy of the traps - can instead perform measurements at different times and temperatures to extract true activation energy

- For a single filling temperature, perform measurements after different delays

$$N = N_0 e^{-k_T t}$$

$$N = N_0 e^{-\frac{t}{\tau_e}}$$

$$\ln(N) = \ln(N_0) - k_T t \quad \ln(N) = \ln(N_0) - \frac{t}{\tau_e}$$

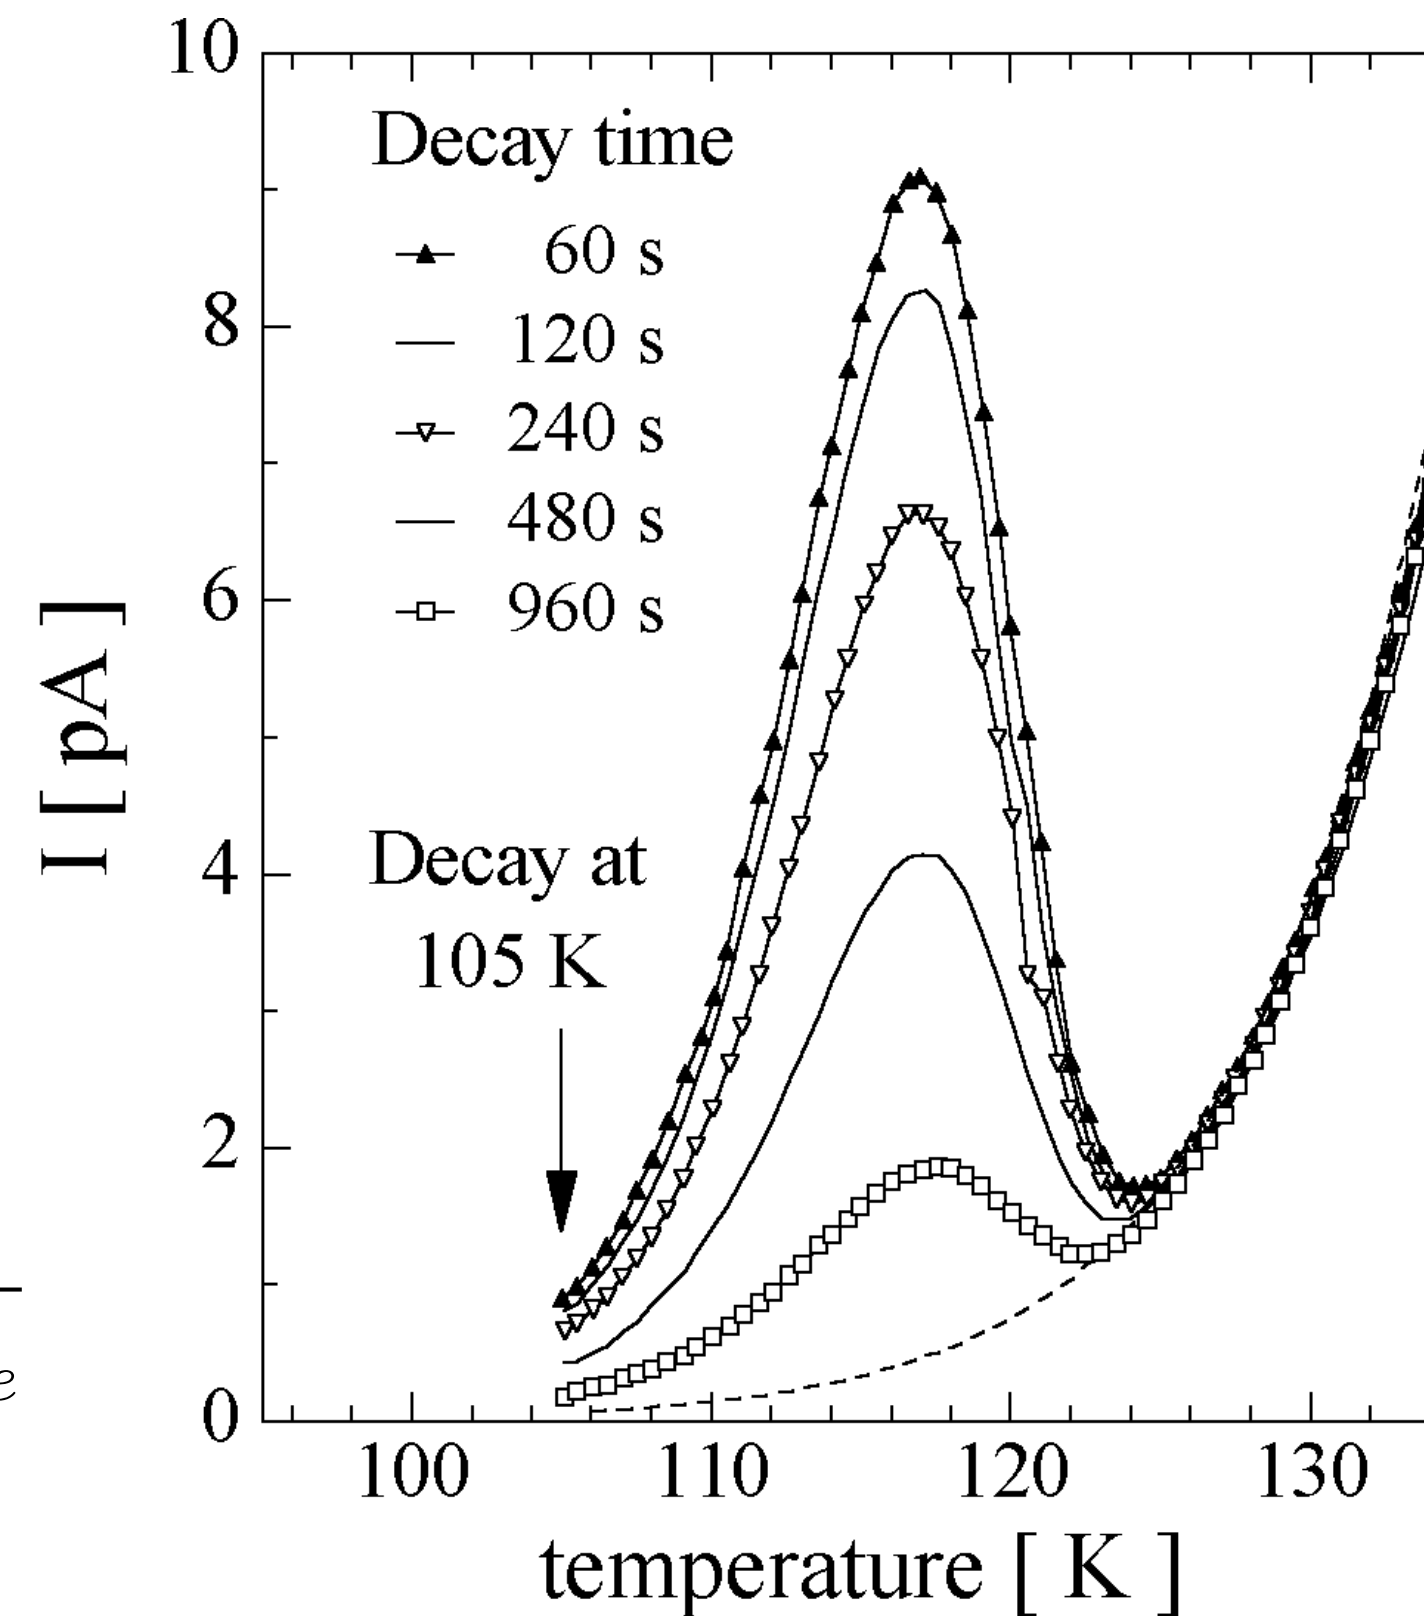

TSC - delayed heating

M.Moll, PhD thesis, 1999


The peak temperature is not a terribly precise way to extract the activation energy of the traps - can instead perform measurements at different times and temperatures to extract true activation energy

- For a single filling temperature, perform measurements after different delays
- Extract the emission time

$$N = N_0 e^{-k_T t}$$

$$N = N_0 e^{-\frac{t}{\tau_e}}$$

$$\ln(N) = \ln(N_0) - k_T t \quad \ln(N) = \ln(N_0) - \frac{t}{\tau_e}$$

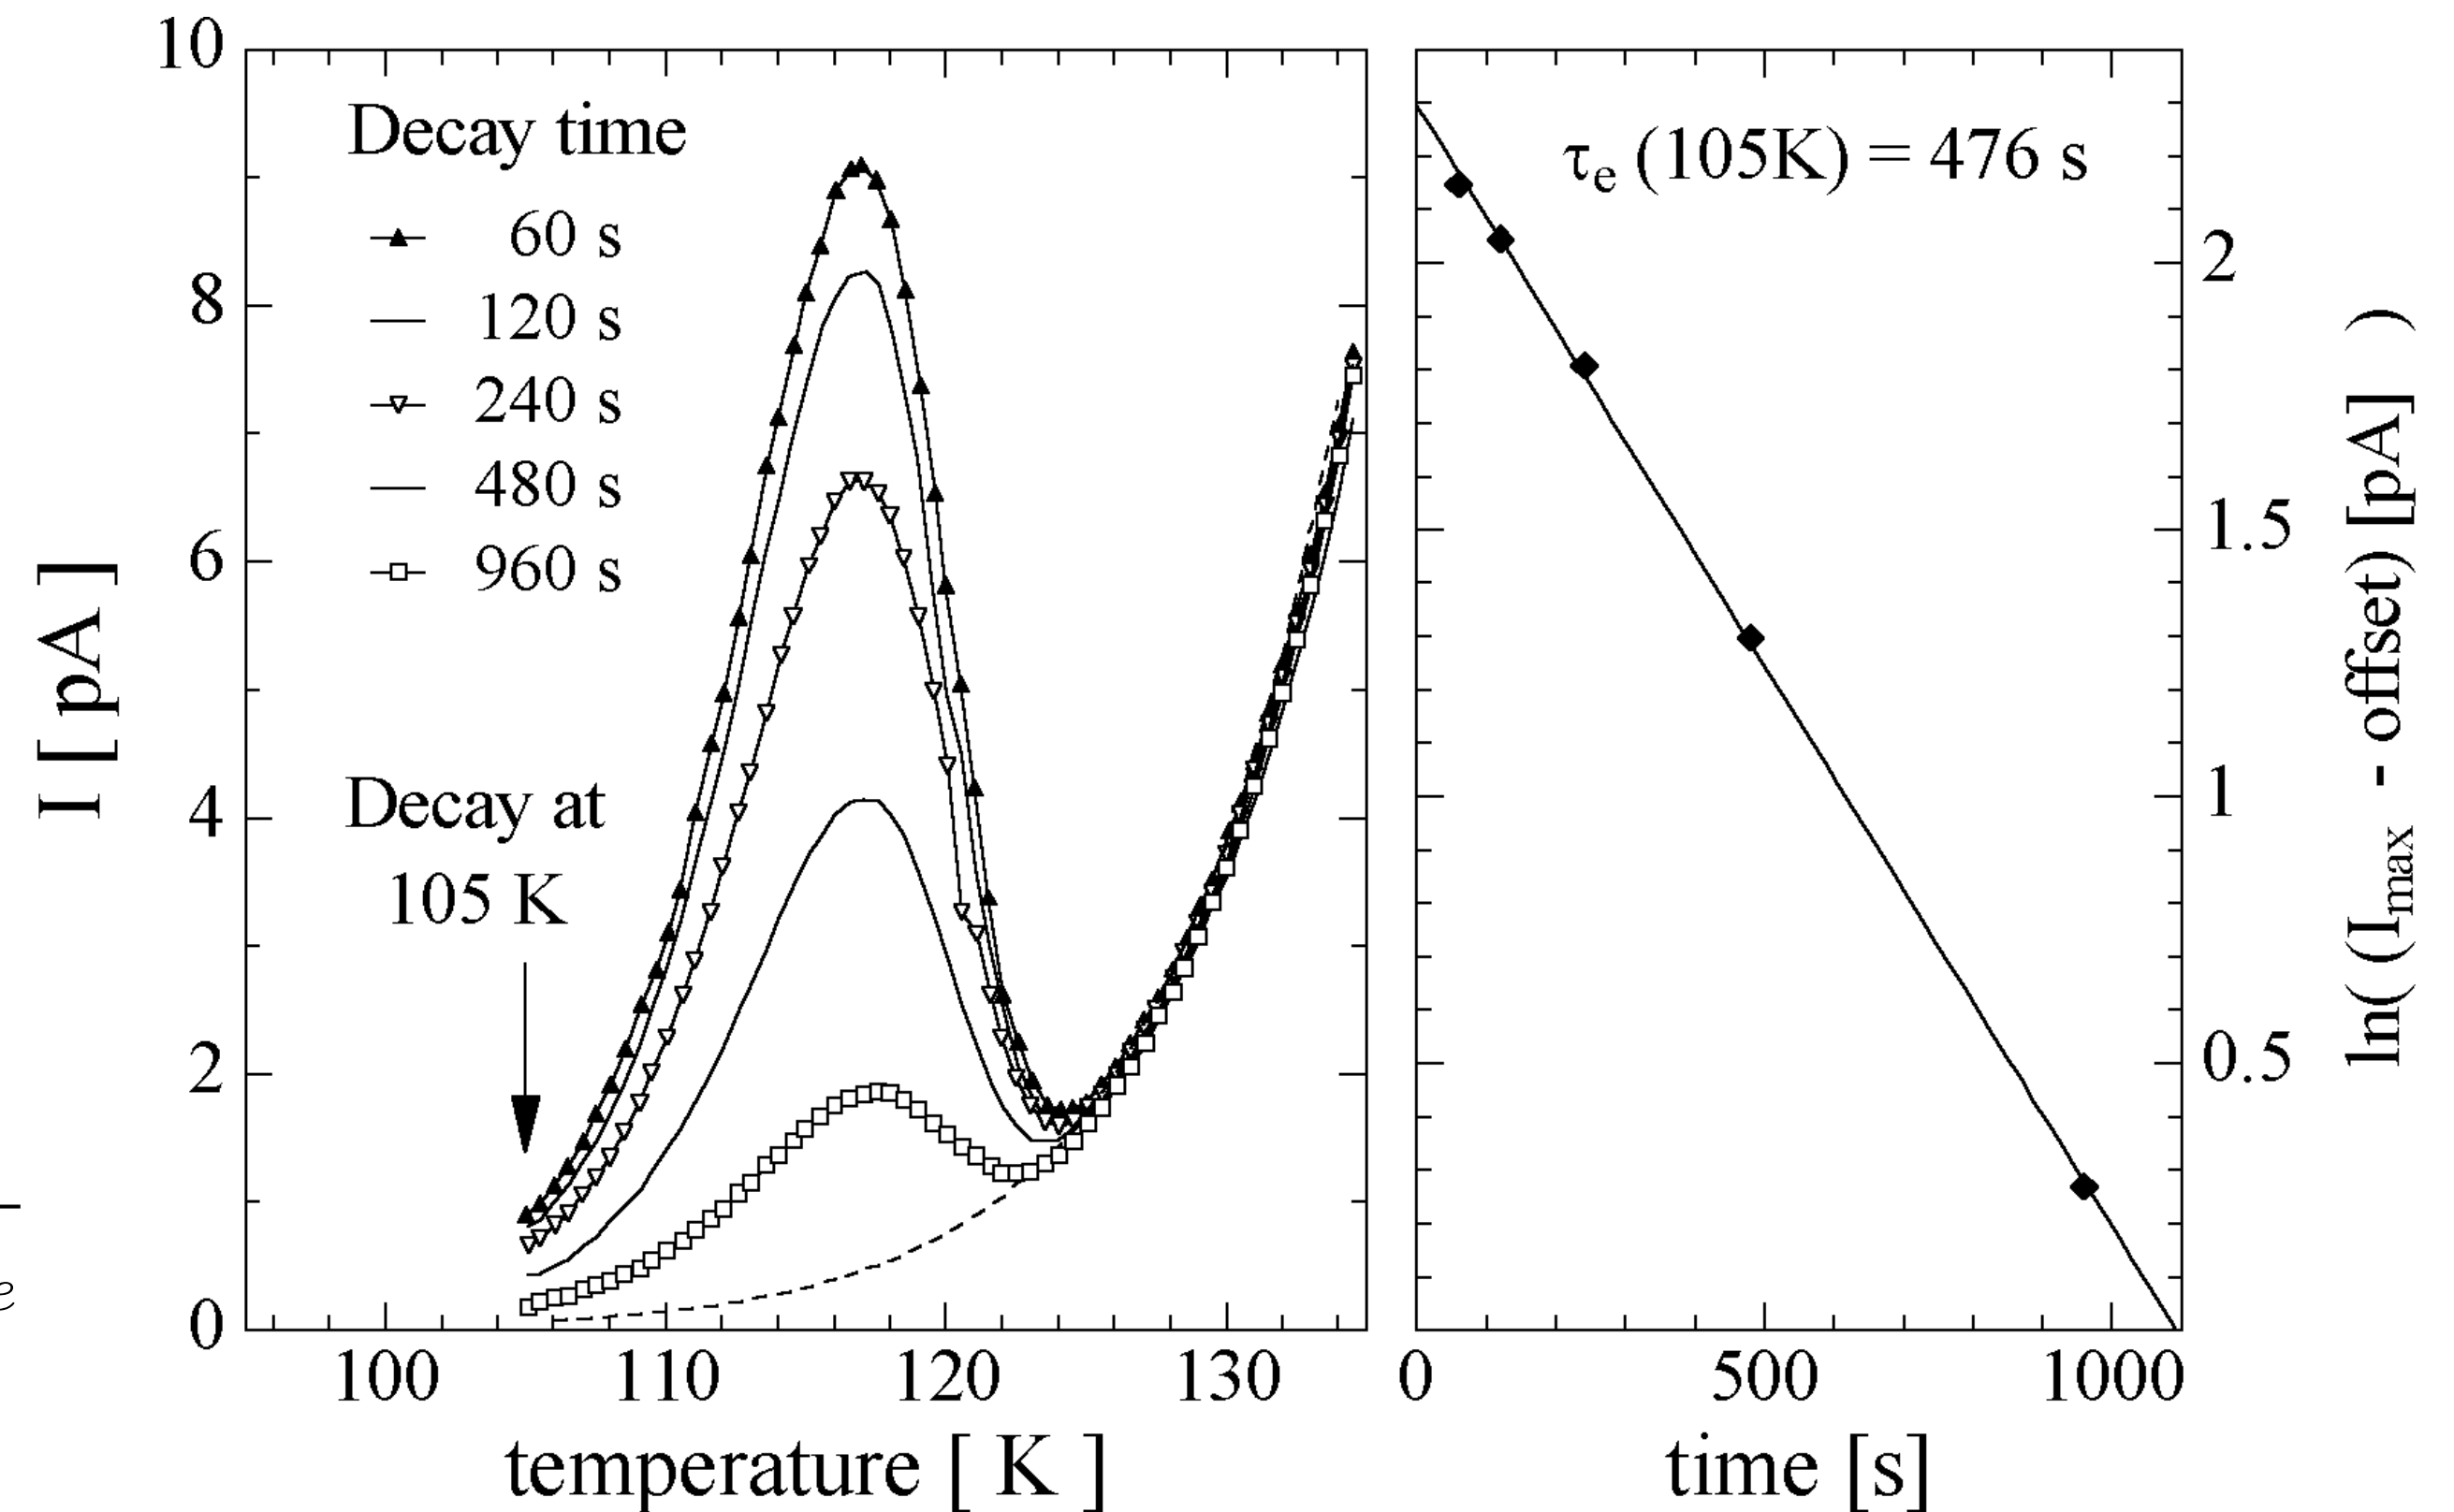


TSC - delayed heating

M.Moll, PhD thesis, 1999

If we just consider the “reaction rate” k_T for a moment:

$$N = N_0 e^{-k_T t}$$

$$\ln(N) = \ln(N_0) - k_T t$$

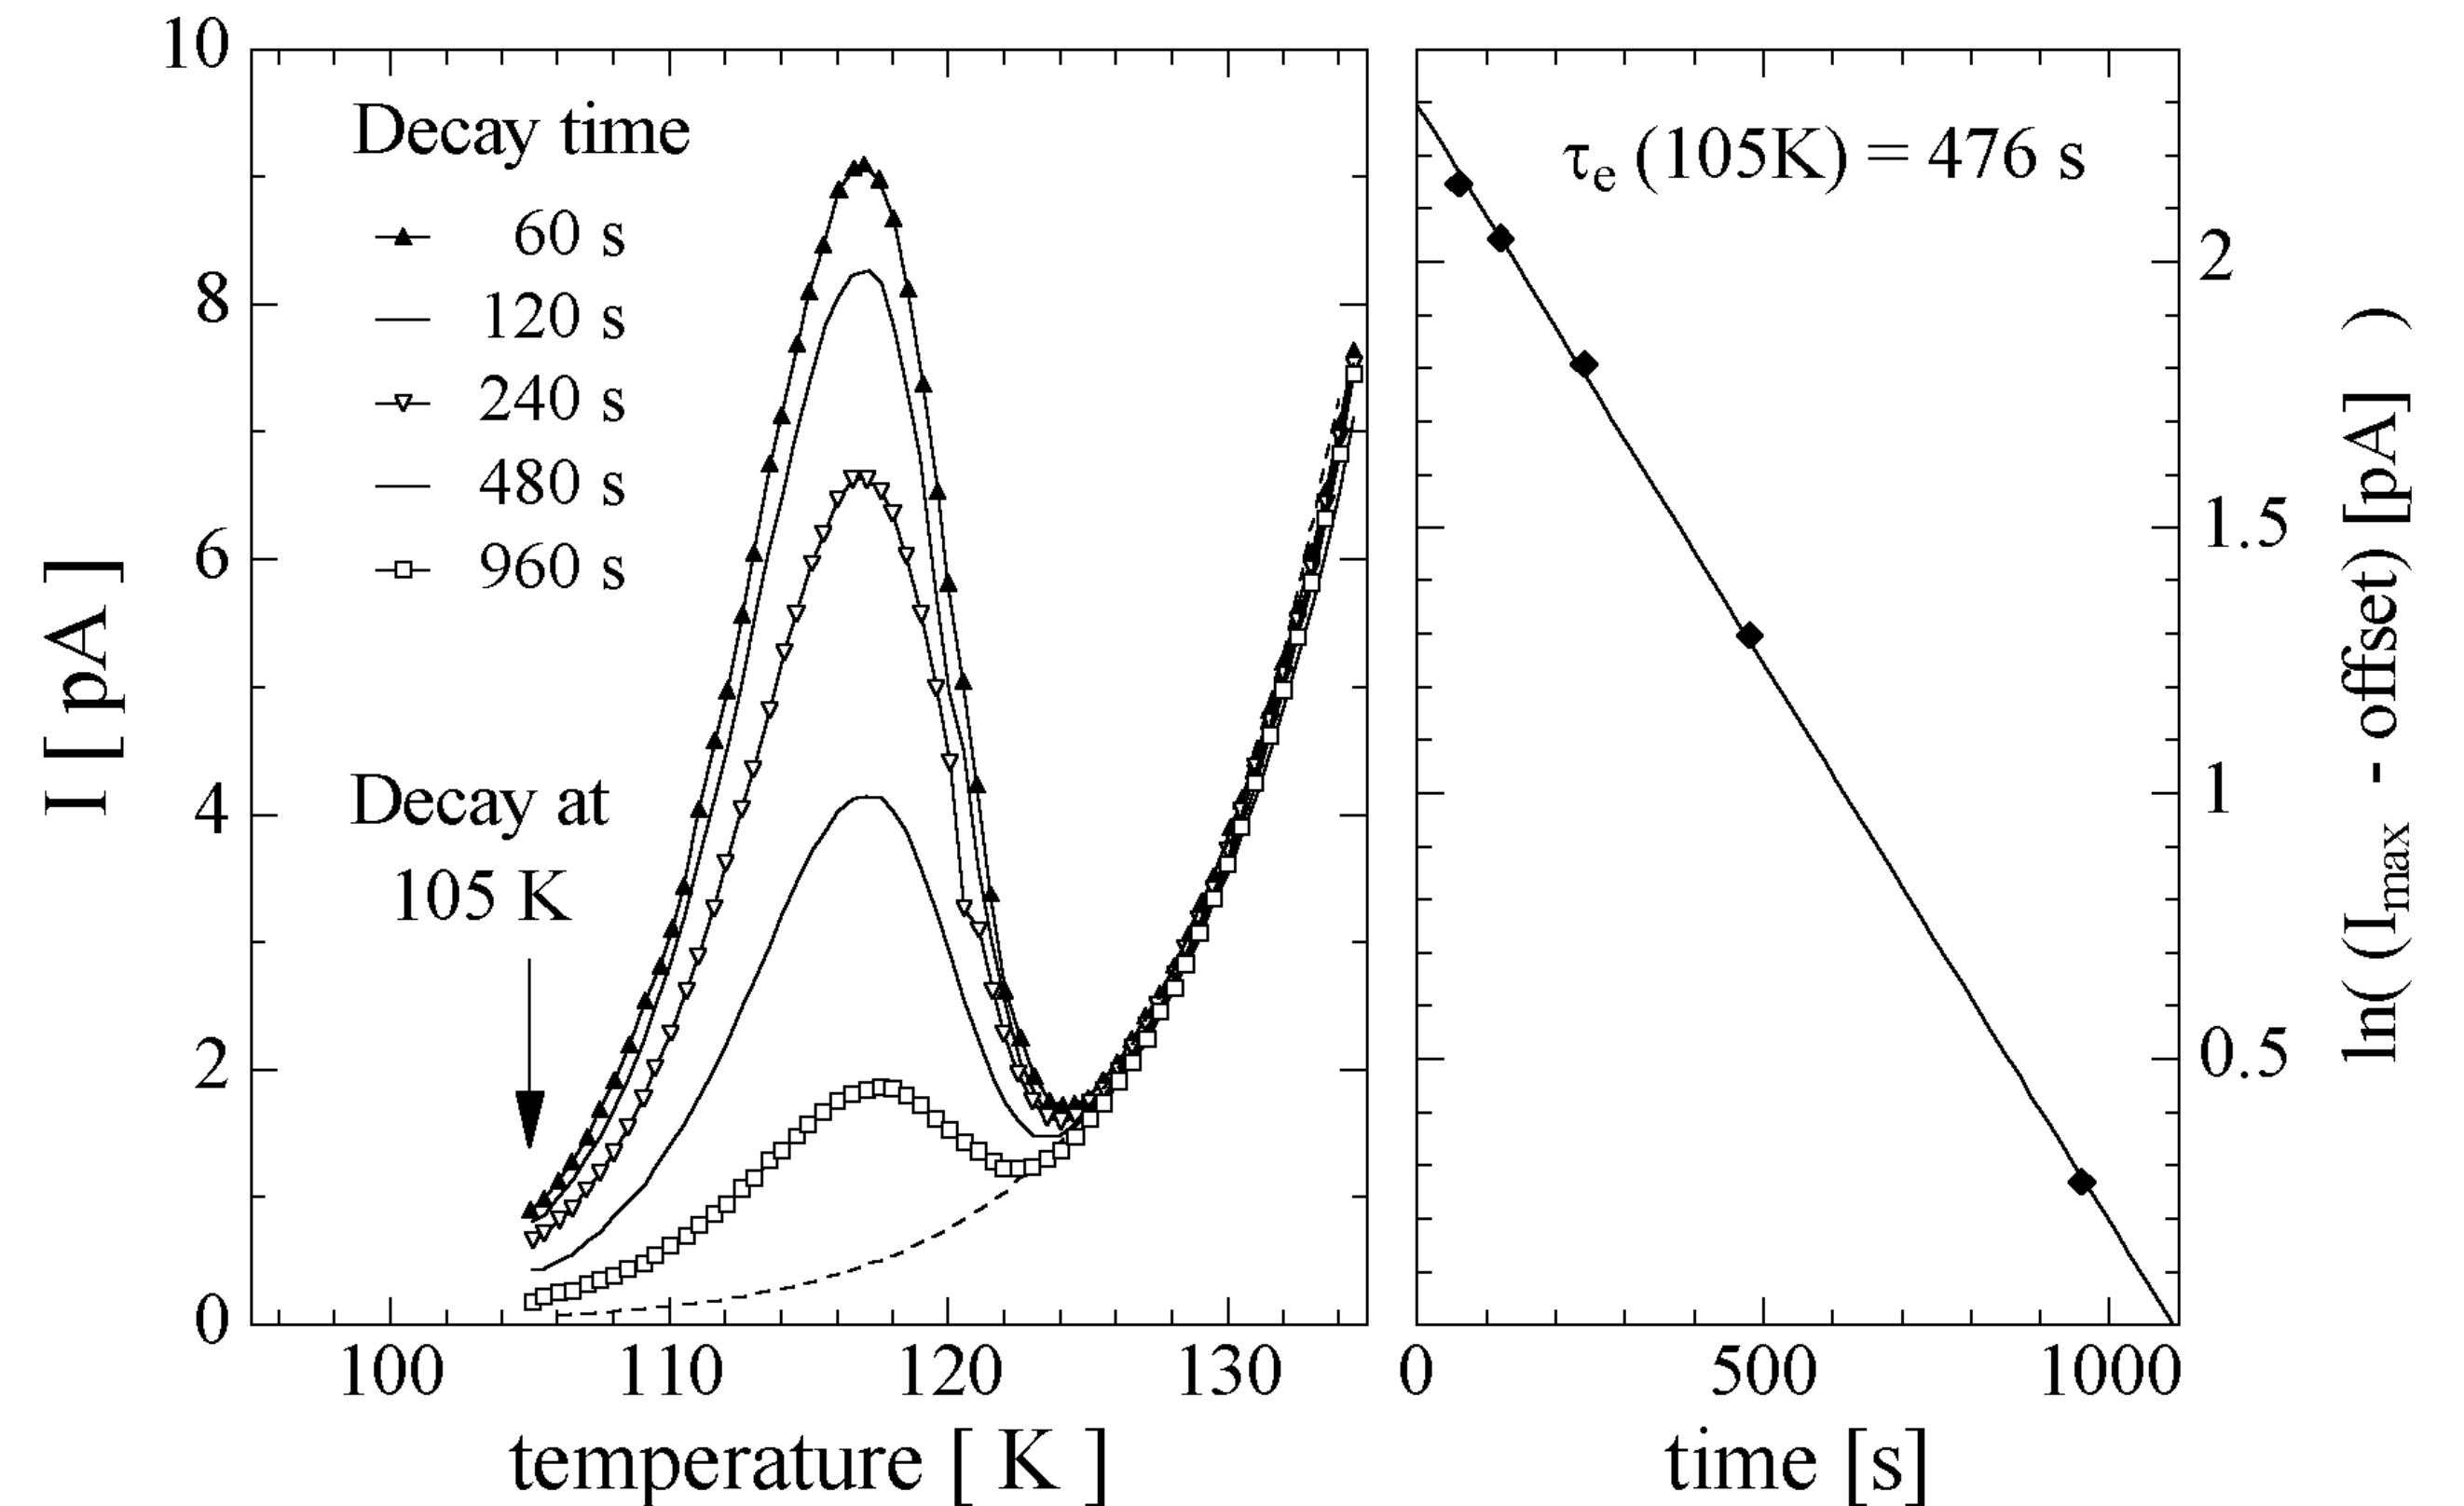

TSC - delayed heating

M.Moll, PhD thesis, 1999


If we just consider the “reaction rate” k_T for a moment:

$$N = N_0 e^{-k_T t}$$

$$\ln(N) = \ln(N_0) - k_T t$$

We can use the Arrhenius Equation to get the E_a :

$$k_T = A e^{-\frac{E_a}{k_B T}}$$

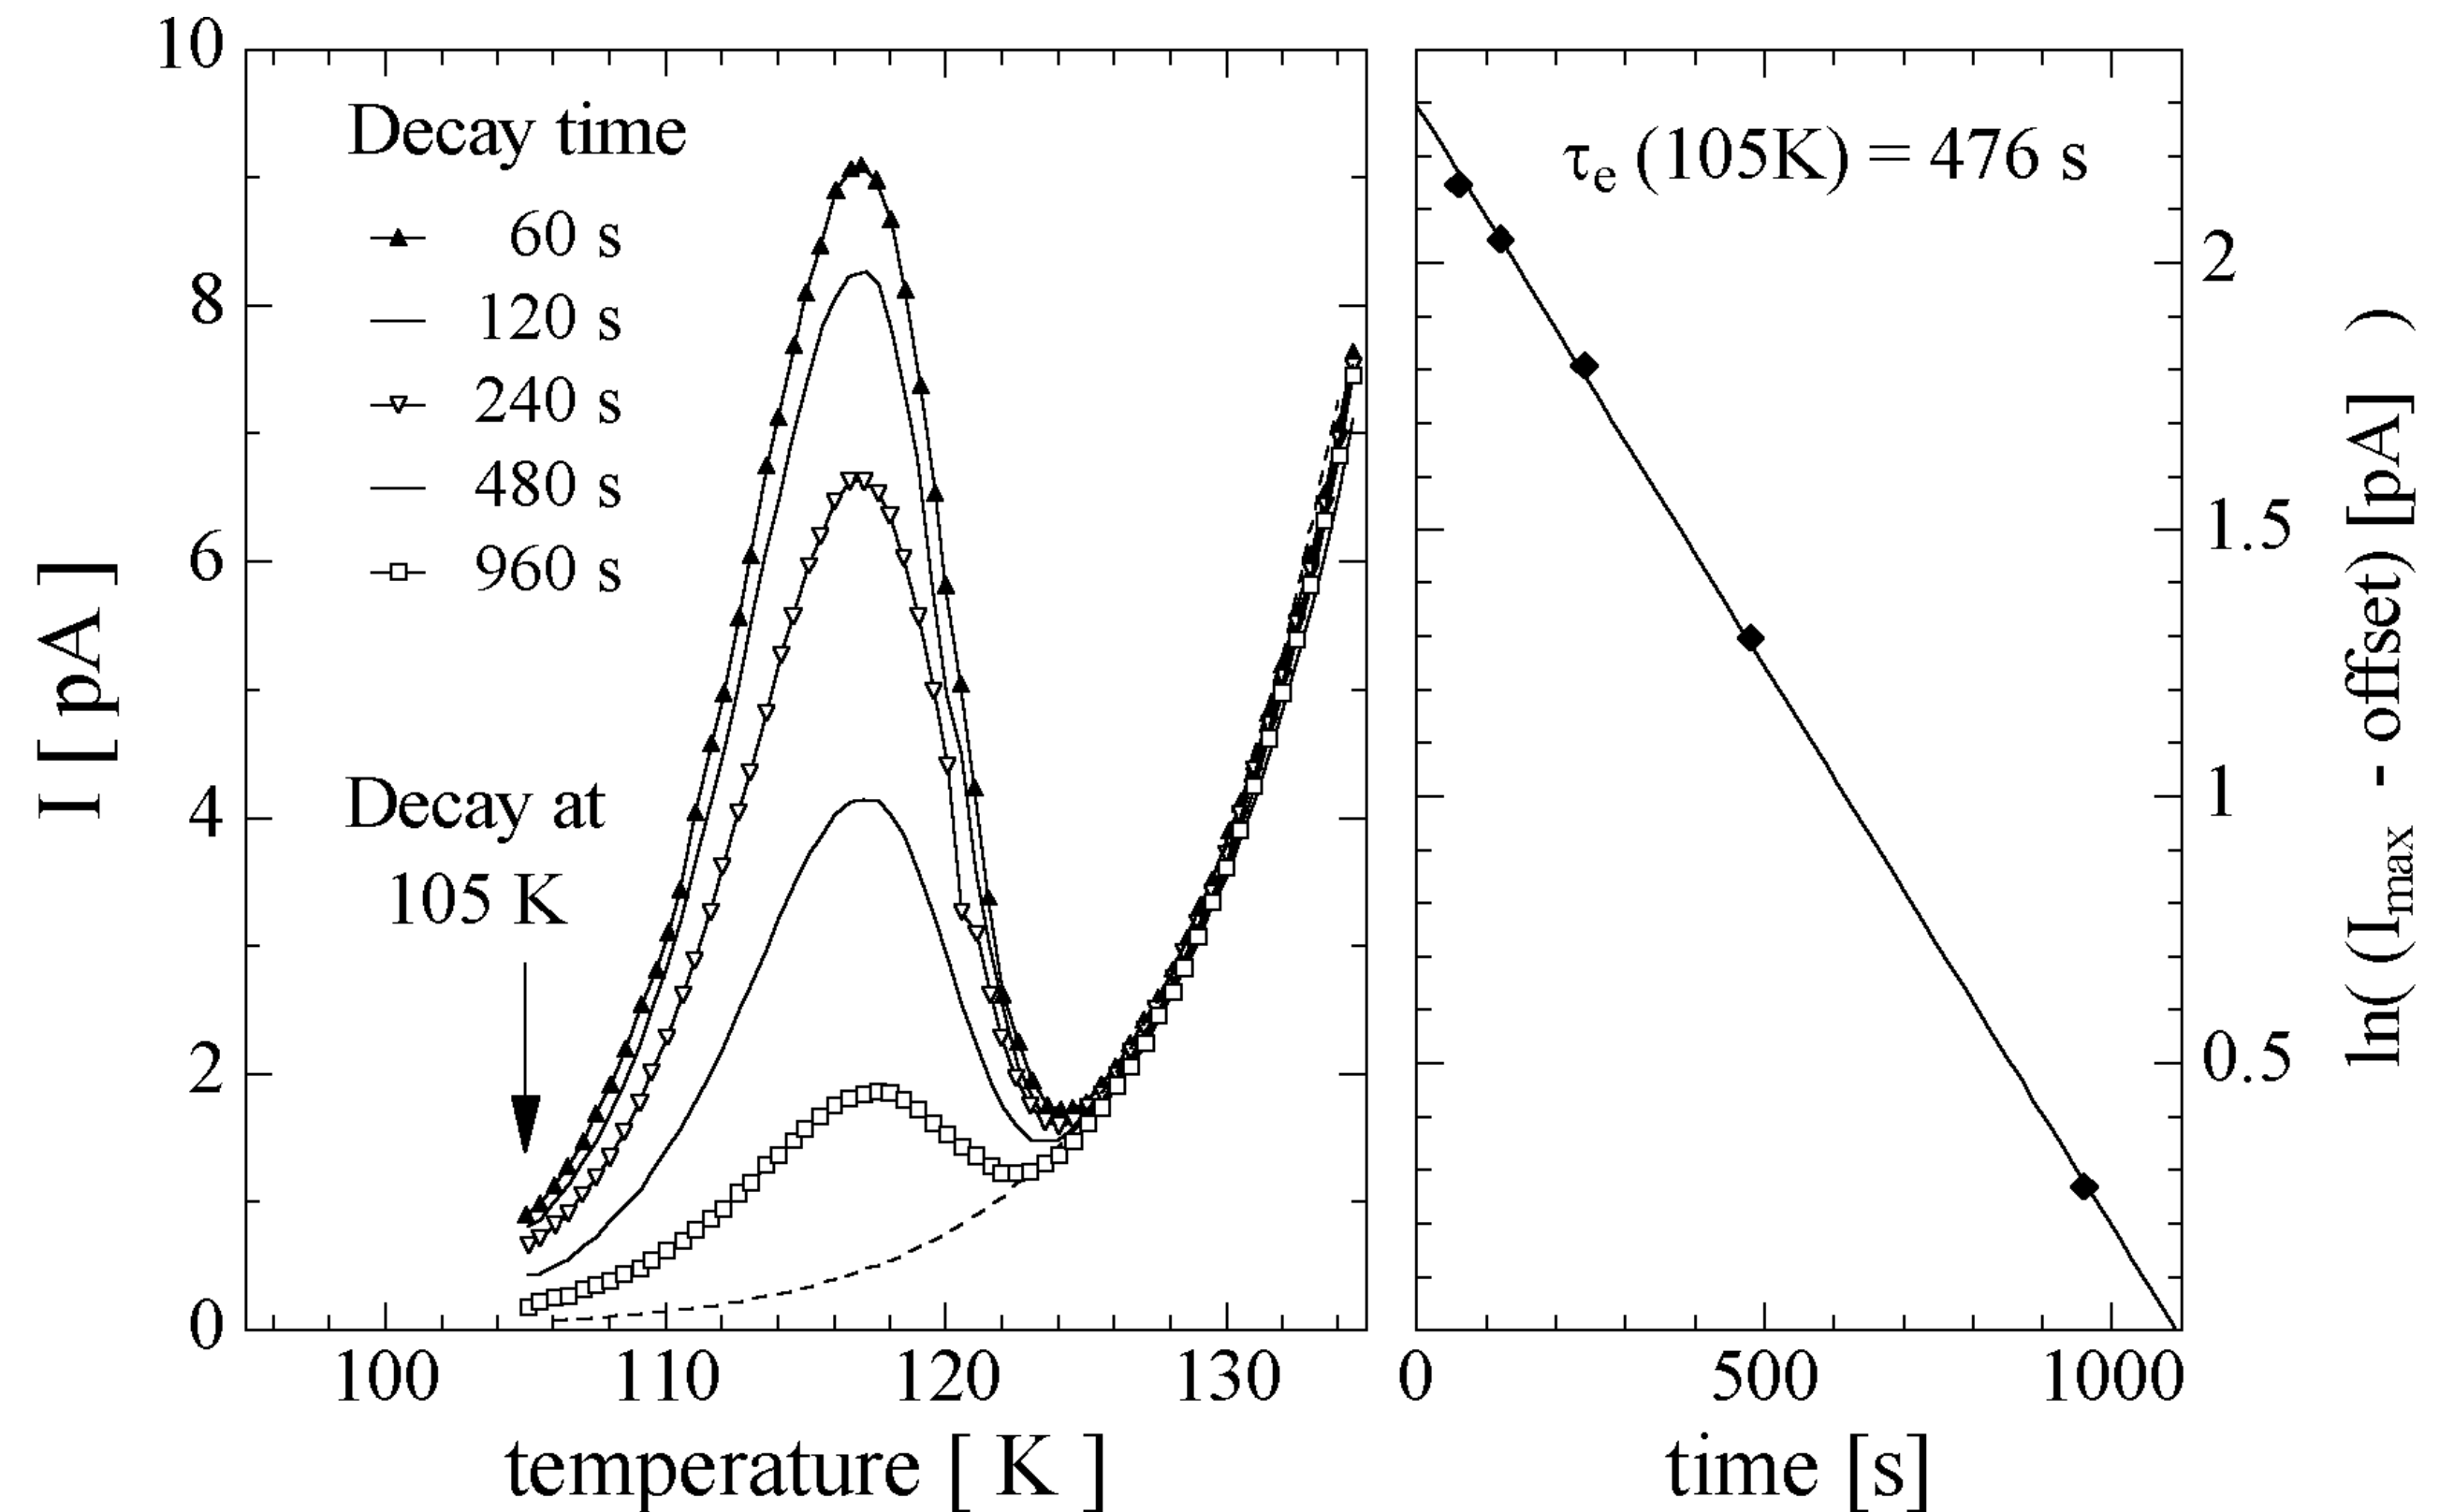

TSC - delayed heating

M.Moll, PhD thesis, 1999

If we just consider the “reaction rate” k_T for a moment:

$$N = N_0 e^{-k_T t}$$


$$\ln(N) = \ln(N_0) - k_T t$$

We can use the Arrhenius Equation to get the E_a :

$$k_T = A e^{-\frac{E_a}{k_B T}}$$

So measuring our emission time/rate constant at different temperatures allows us to extract the energy level of the trap:

$$\ln(k_T) = \ln(A) - \frac{E_a}{k_B} \frac{1}{T}$$

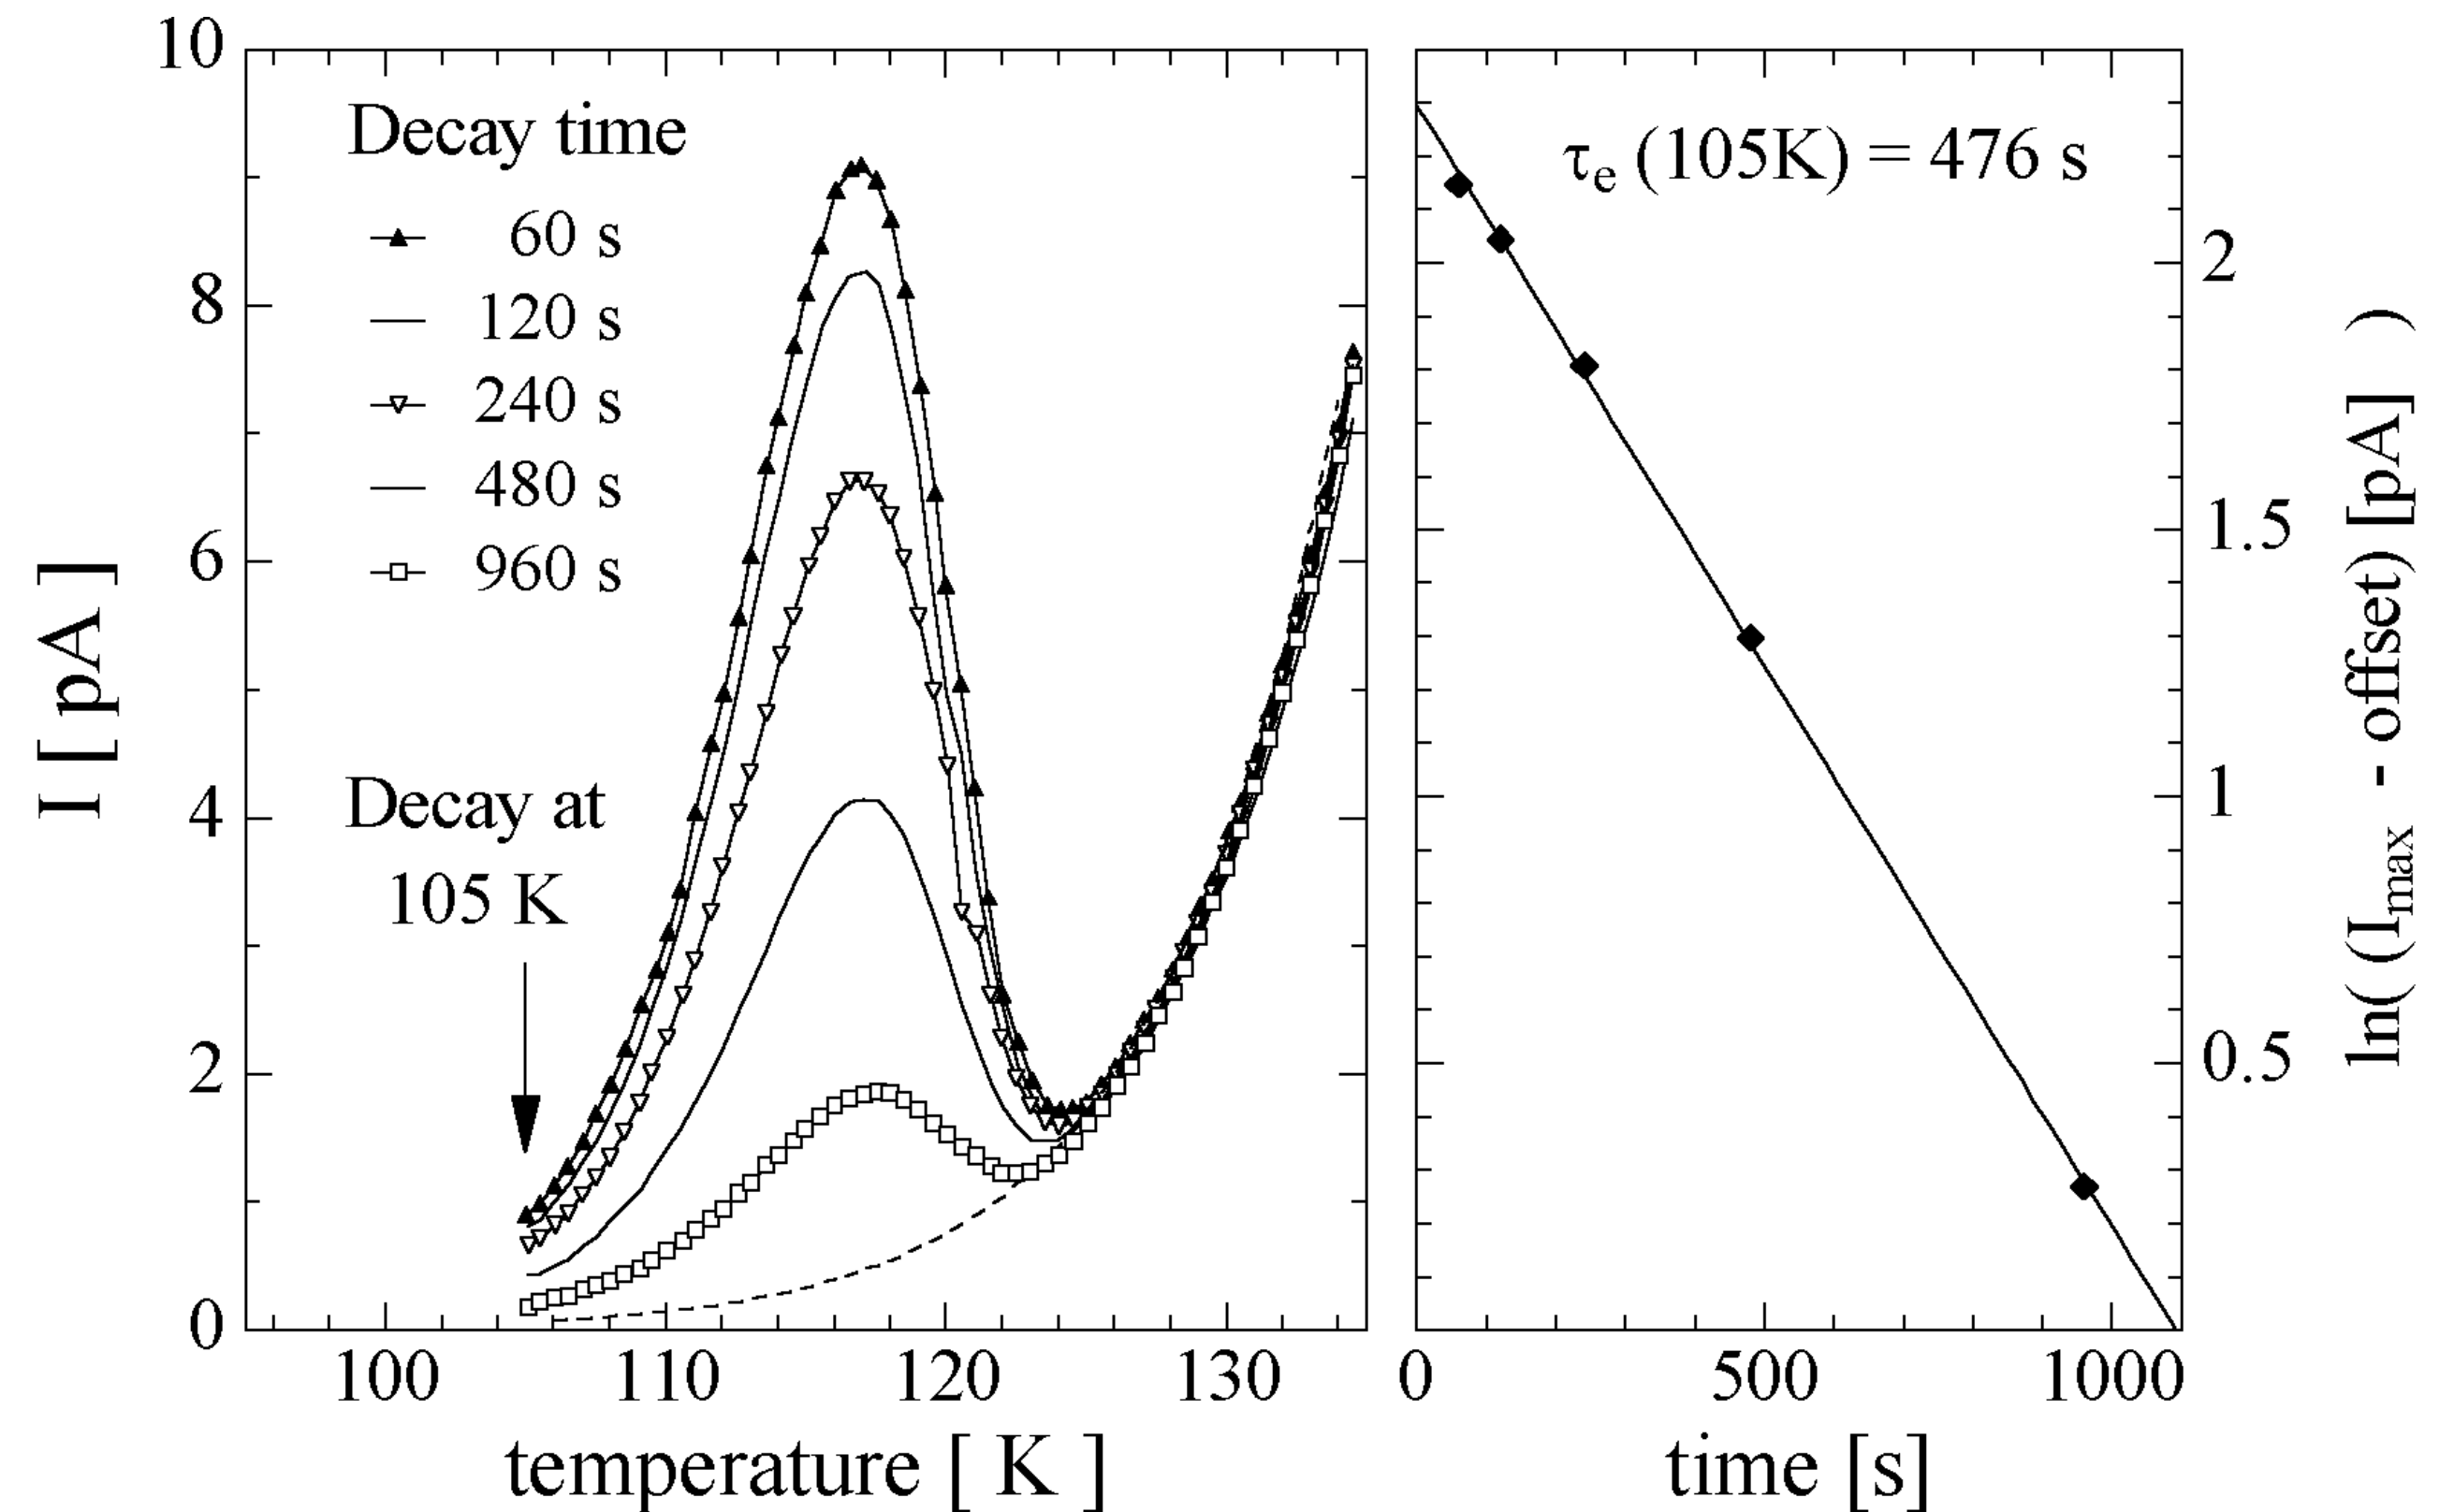

Field emission effect


Ioana Pintilie, 11th RD50 Workshop, 2007

Depending on the charge and type of the defect (and bulk), the departure of a charge carrier may be affected by the resulting space charge

- Eg. An electron emitted from a donor state in an n-type bulk leaves a positive charge

This energy barrier can be affected by the external bias: this is known as the **Poole-Frenkel effect**

- Measurements taken with different reverse biases can help to deduce the defect type, and extract the activation energy dependence on bias

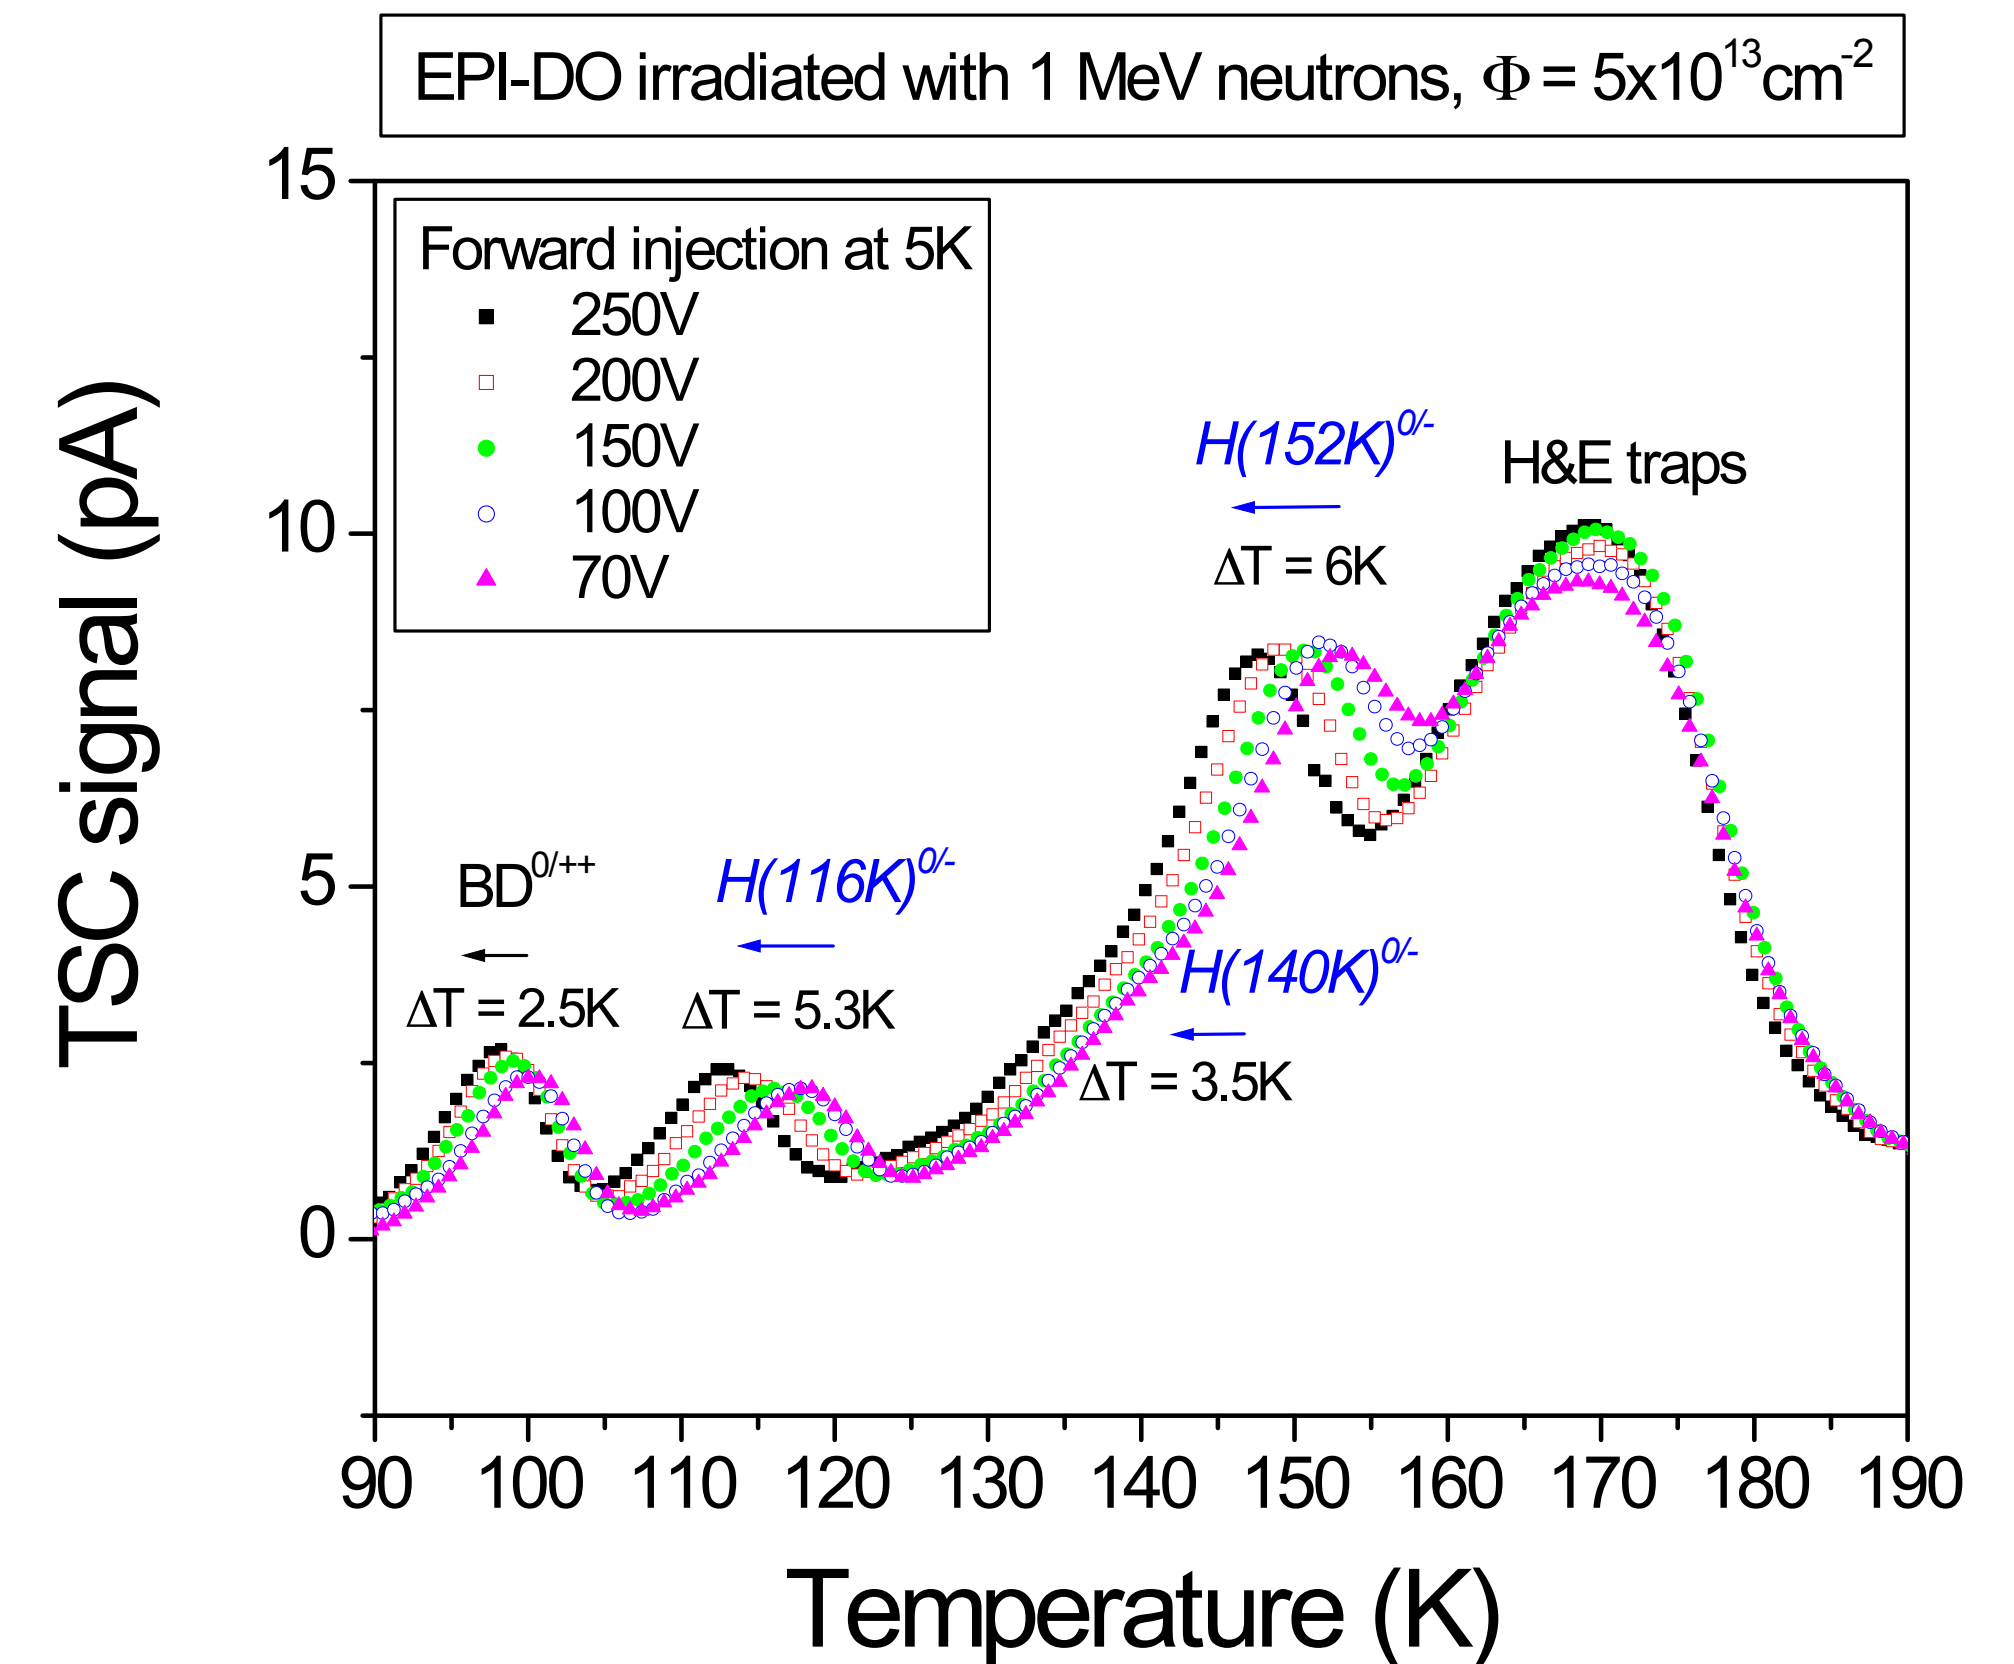

TSC - electron/hole capture cross-section



M.Moll, PhD thesis, 1999

As mentioned earlier, for some filling techniques there is an injection of both electrons and holes

- Eg. Forward-biasing the sensor

For different filling temperatures, the ratio of electrons captured to holes captured will vary as the activation energies are different

- The peak height as a function of temperature gives an indication for the ratio between the electron and hole capture coefficient

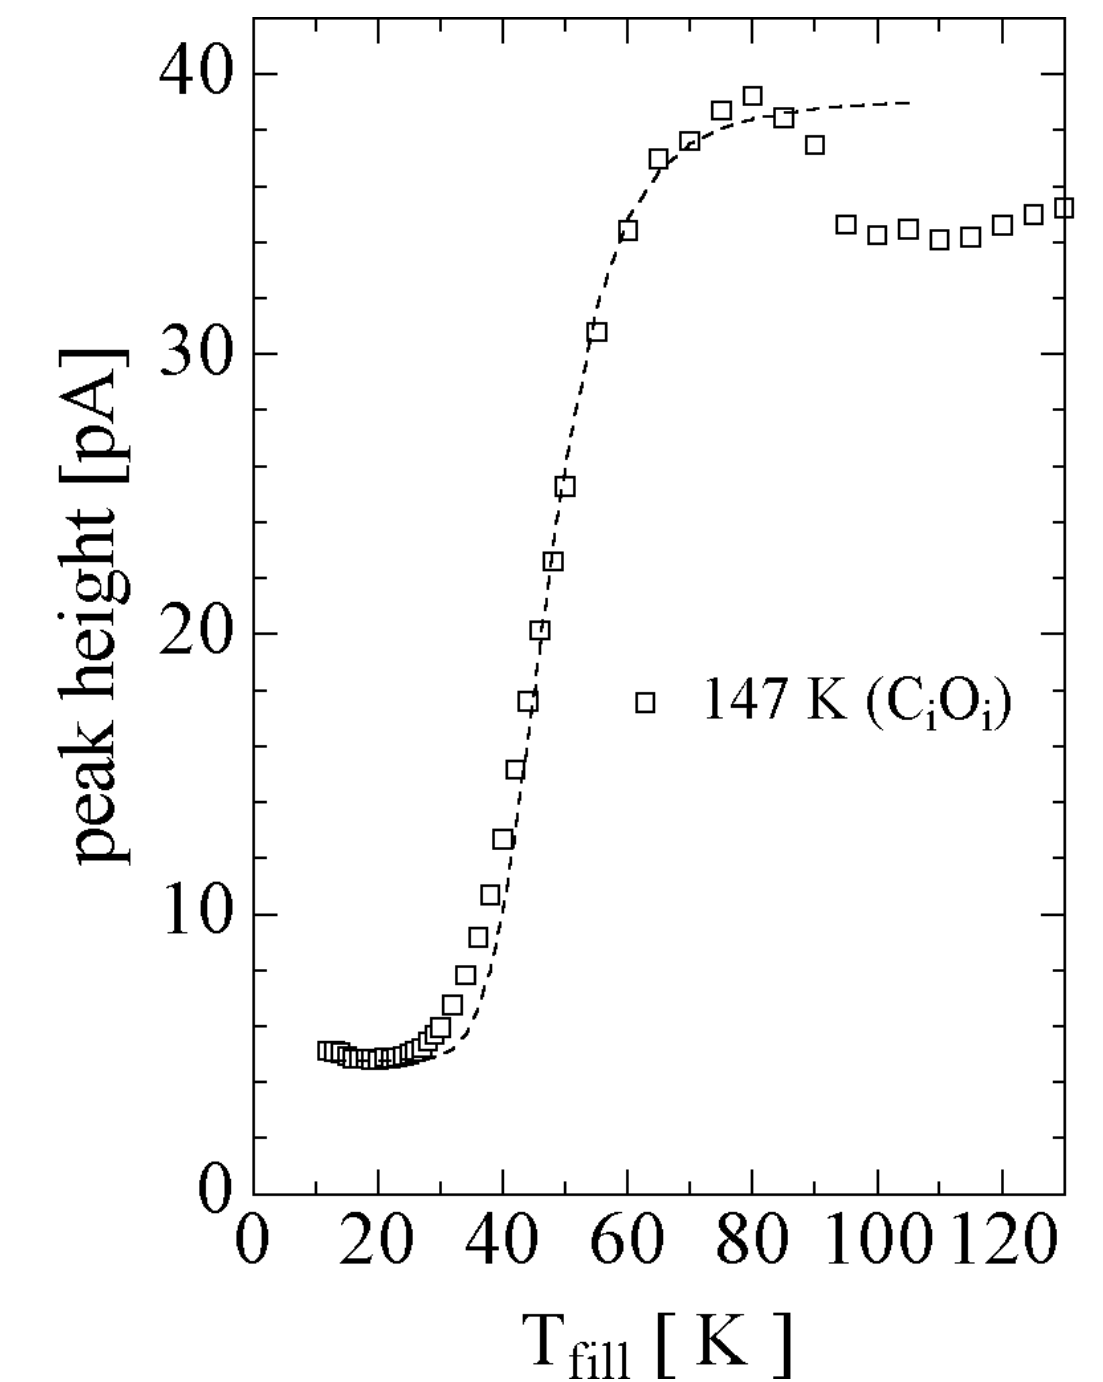
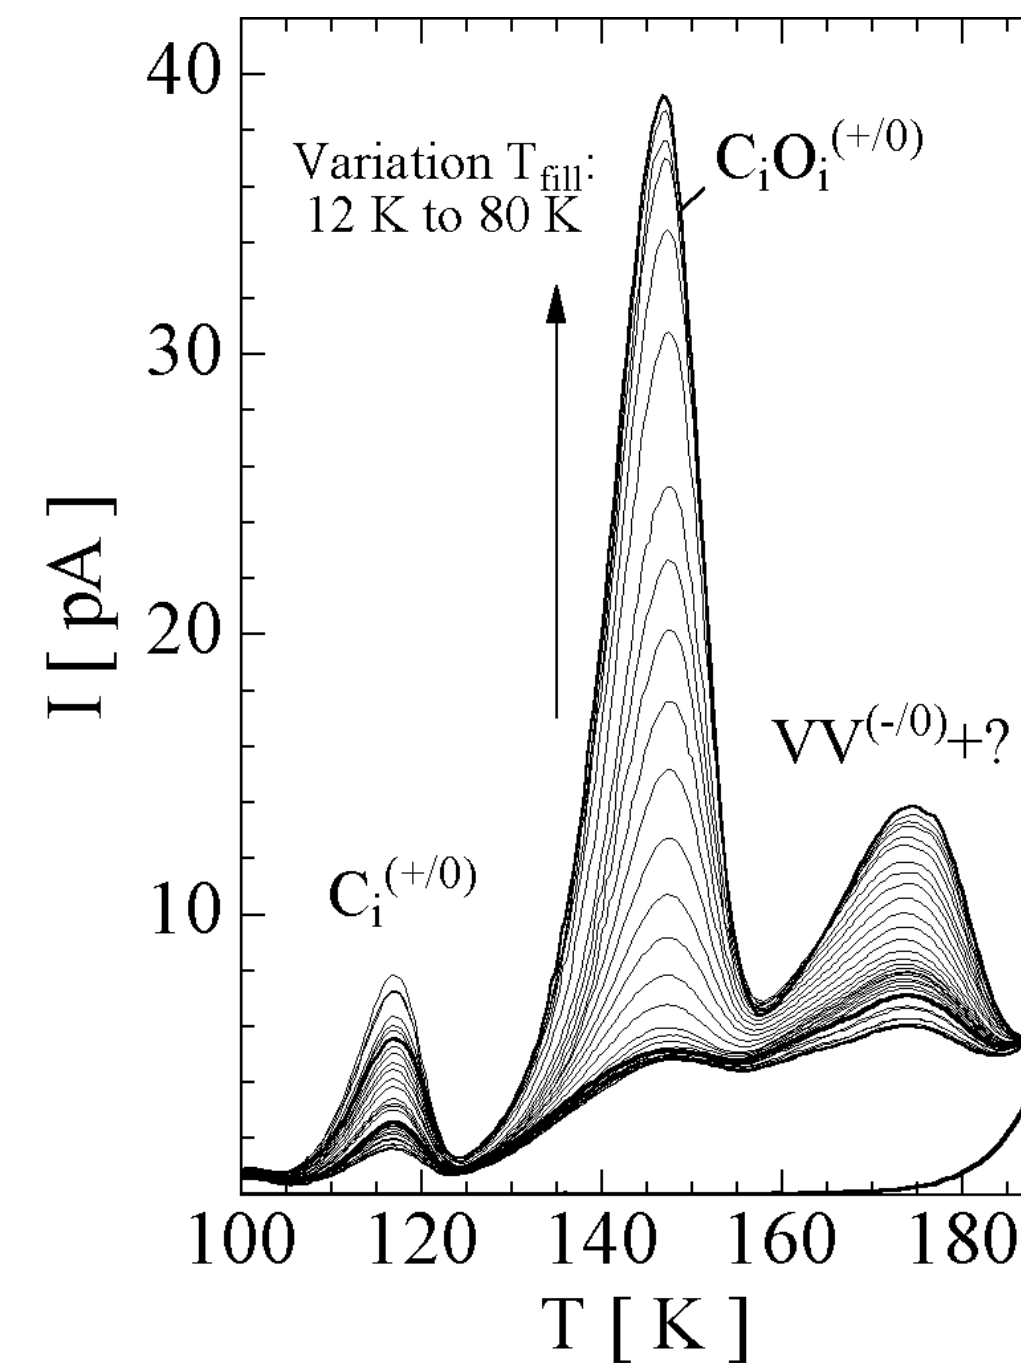


These measurements are not easy to interpret

M.Moll, PhD thesis, 1999

Can compare explicitly the difference in observed spectra for things like variation in the filling temperature, or the effect of cooling the sample with zero applied bias voltage

- On the left, the filling is via **forward biasing**; note that the C_iO_i dependence on temperature was shown on the previous slide
- On the right, traps were filled by cooling under zero bias (majority carriers, n-type bulk)

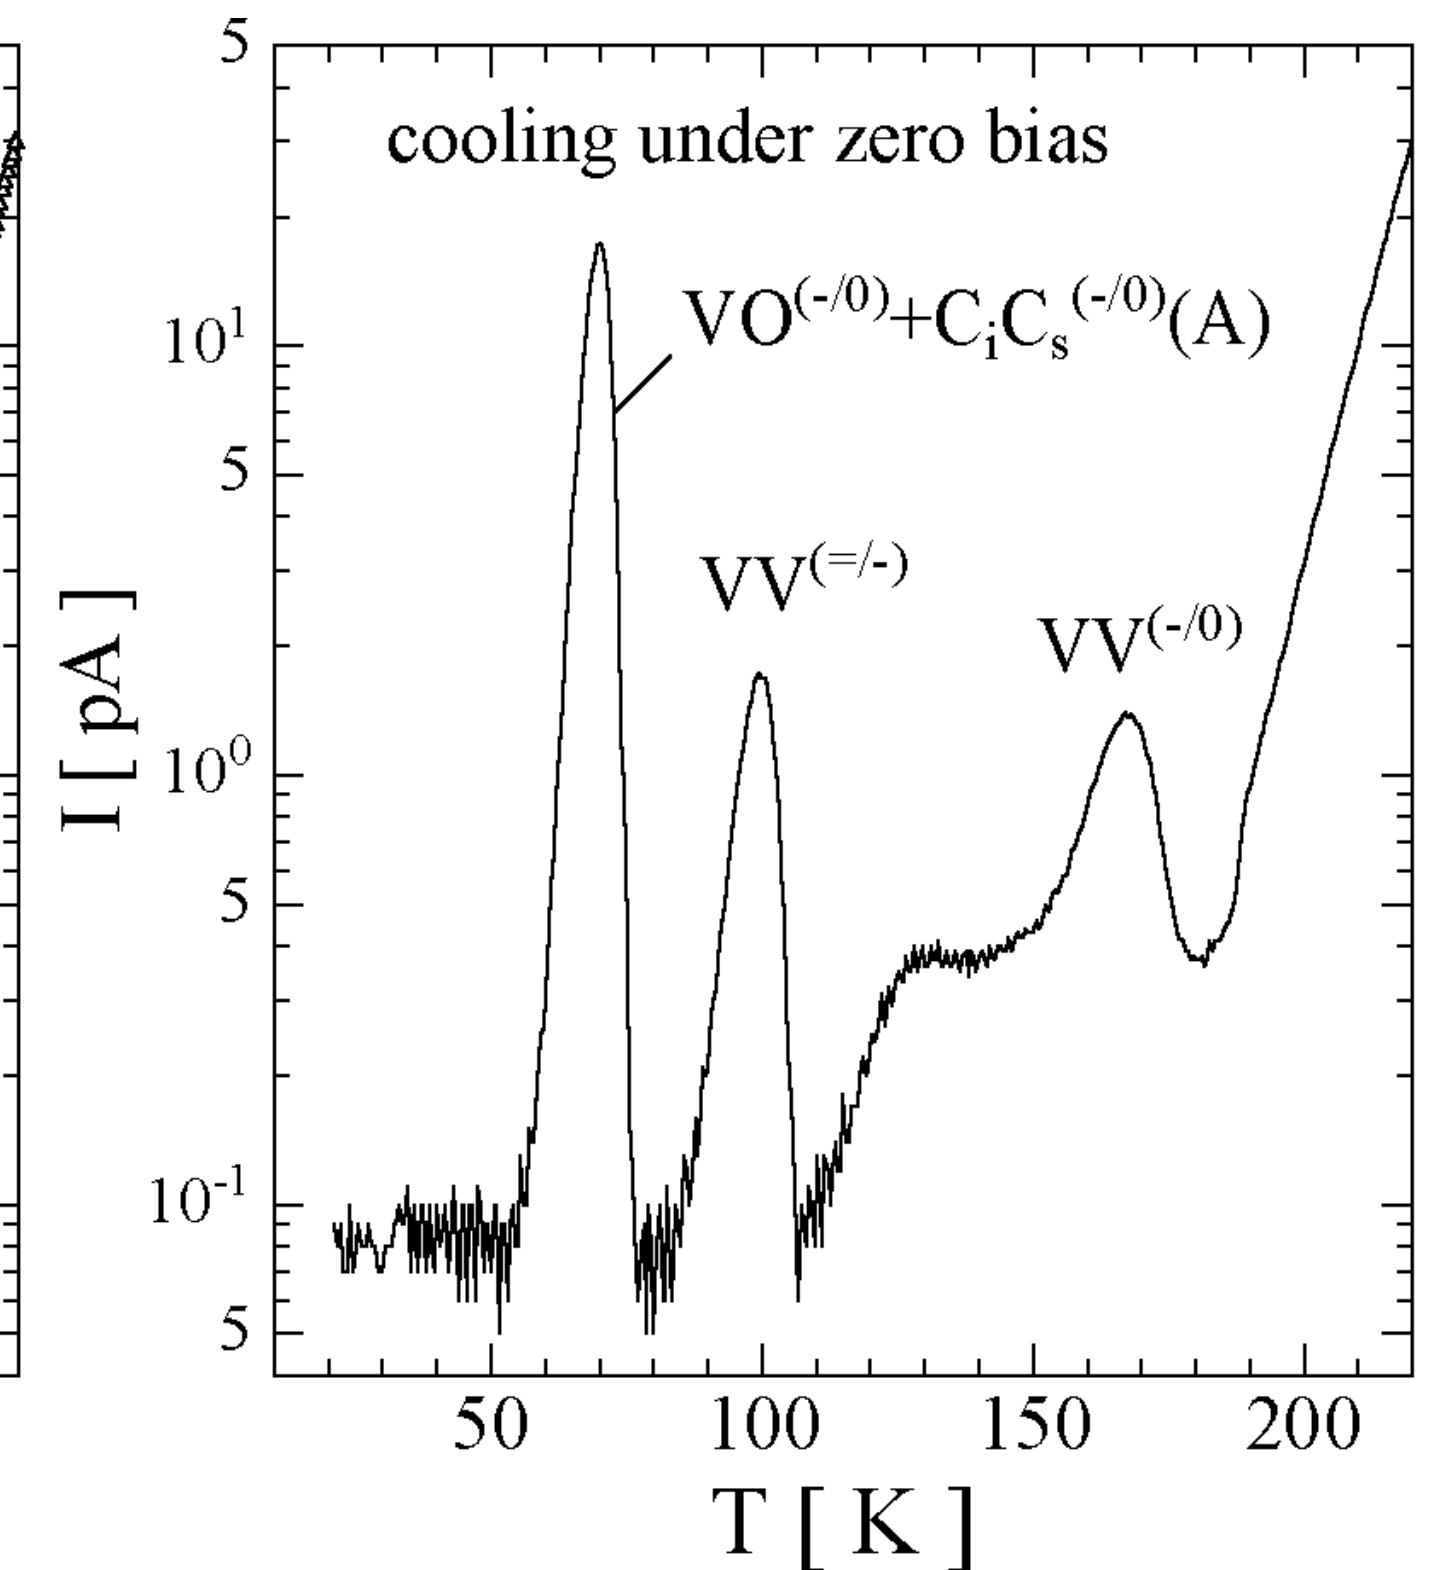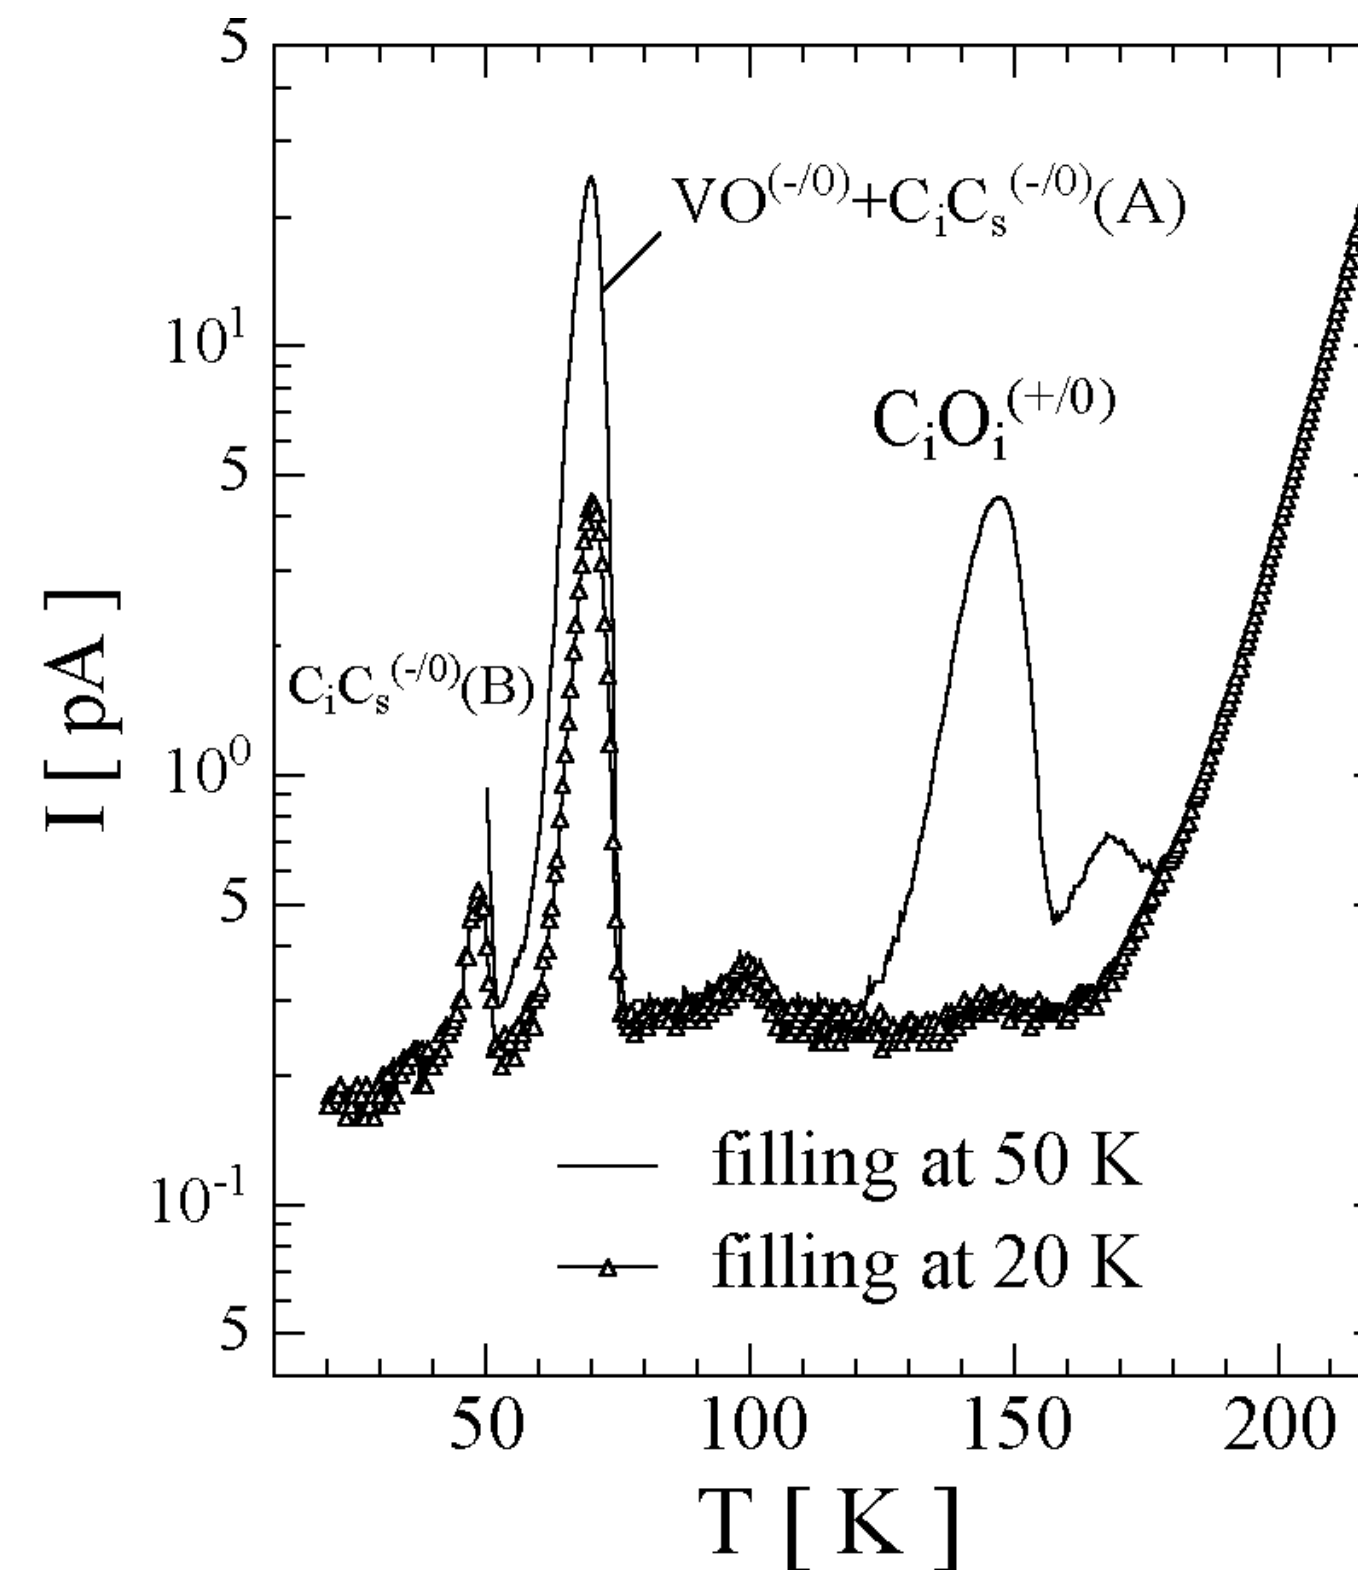

DLTS

For TSC, all that we could observe on heating was a current

- No indication of whether traps were acting on electrons or holes


A different technique for determining trap type and presence is

Deep Level Transient Spectroscopy (DLTS)

DLTS - signal generation

DLTS is based around transient measurements of occupied traps within the semiconductor


- The *transient* part relates to the relaxation of the system, which starts off under reverse bias

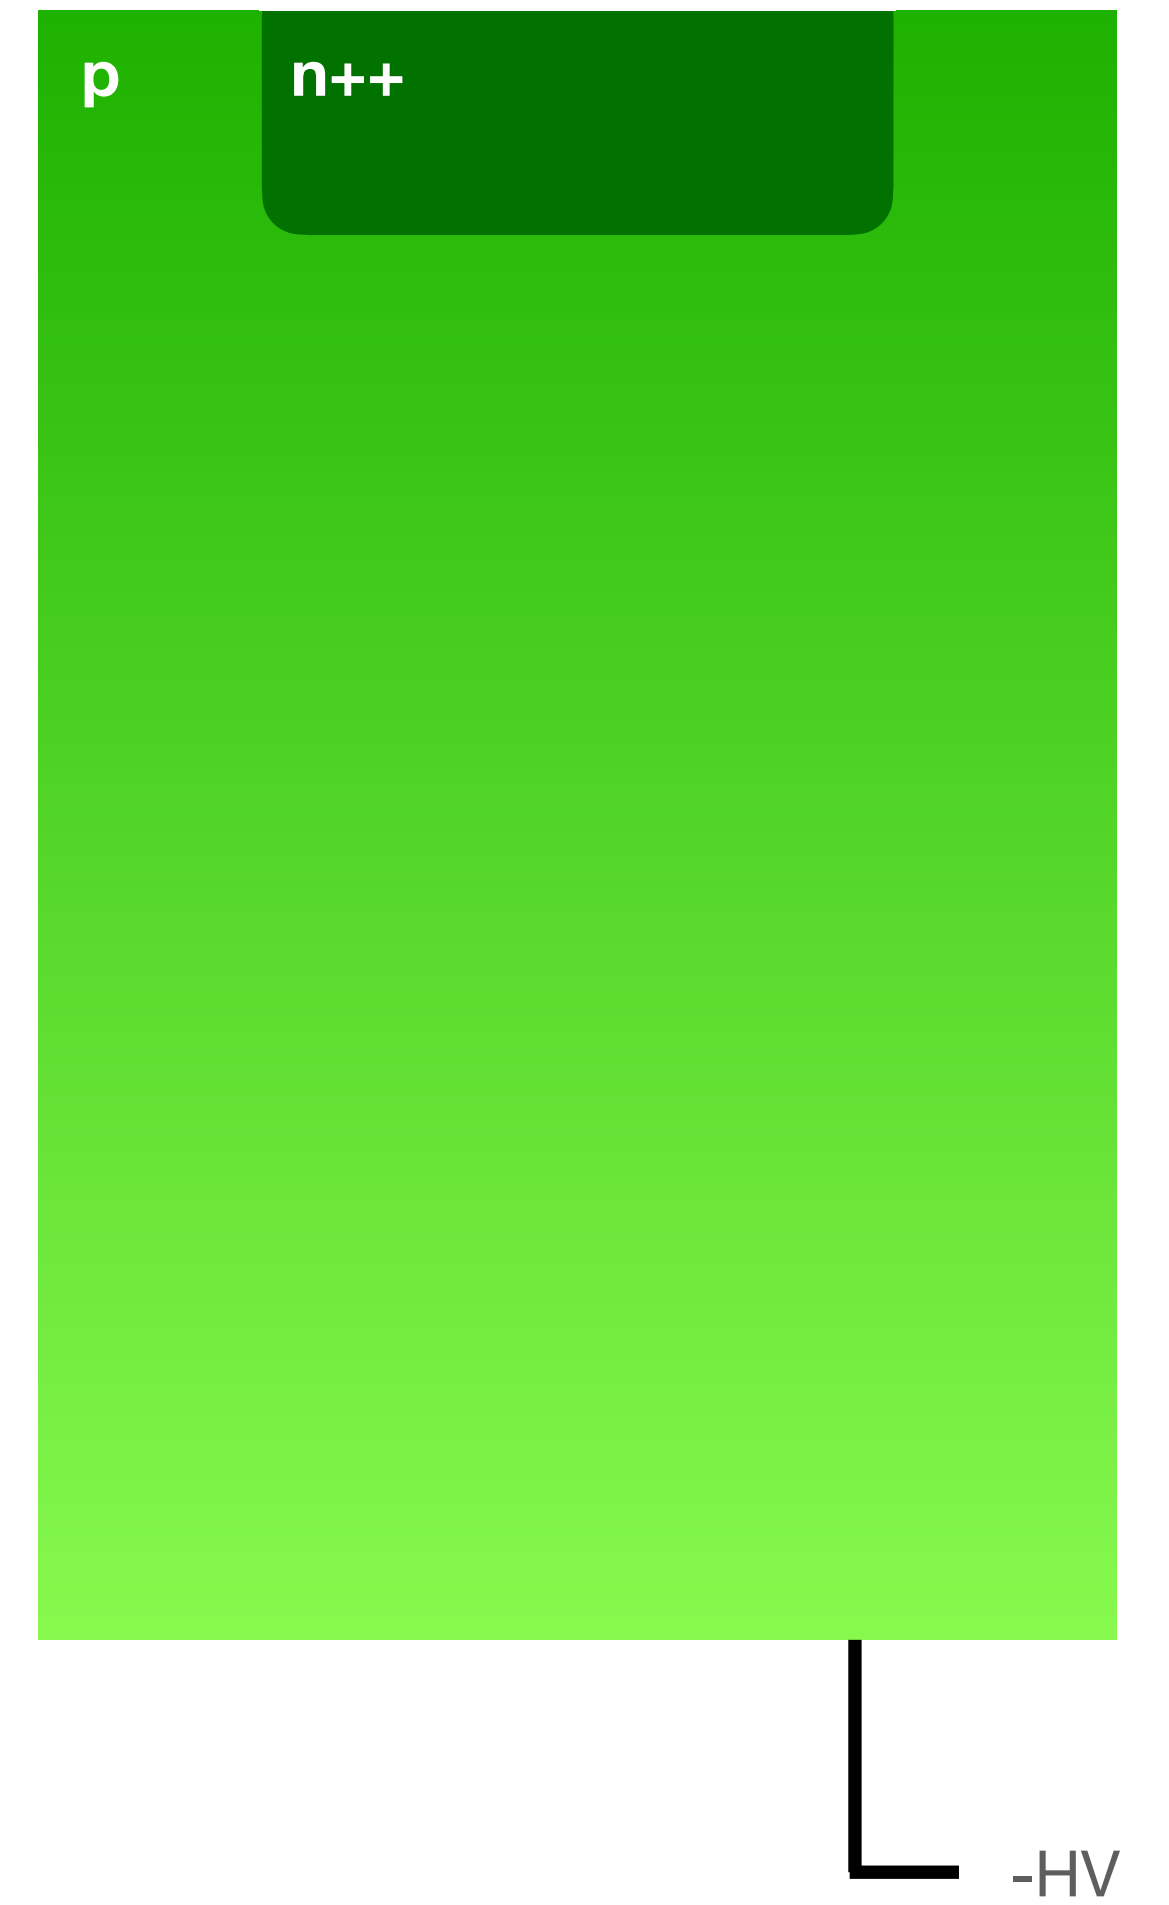

DLTS - signal generation

DLTS is based around transient measurements of occupied traps within the semiconductor


- The *transient* part relates to the relaxation of the system, which starts off under reverse bias
- Traps are often filled by pulsing a voltage across the sensor - though they can be filled optically as for TSC - which fills all of the traps with majority carriers (reduced depletion) or a mixture of minority and majority carriers (forward bias)

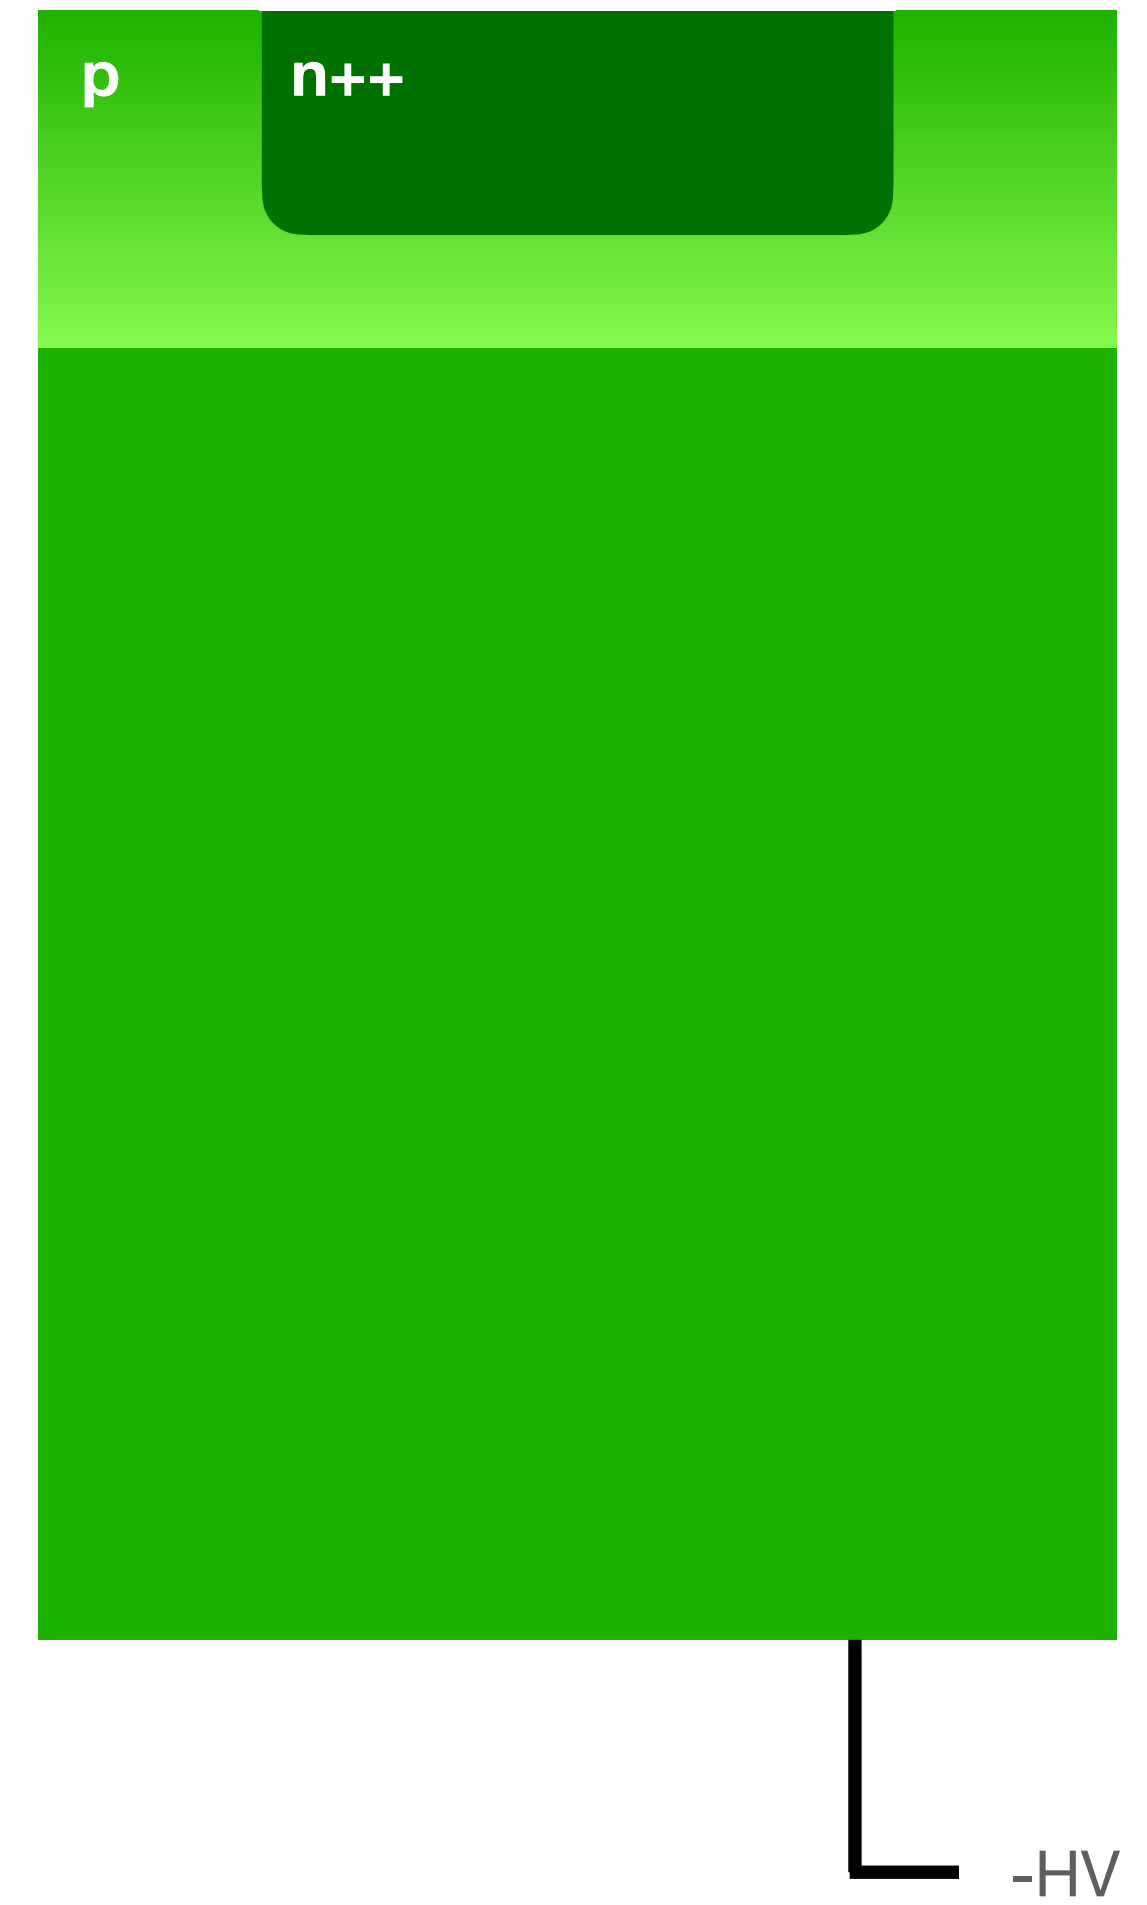

DLTS - signal generation

DLTS is based around transient measurements of occupied traps within the semiconductor

- The *transient* part relates to the relaxation of the system, which starts off under reverse bias
- Traps are often filled by pulsing a voltage across the sensor - though they can be filled optically as for TSC - which fills all of the traps with majority carriers (reduced depletion) or a mixture of minority and majority carriers (forward bias)
- The sensor is returned to full depletion and the change in capacitance measured

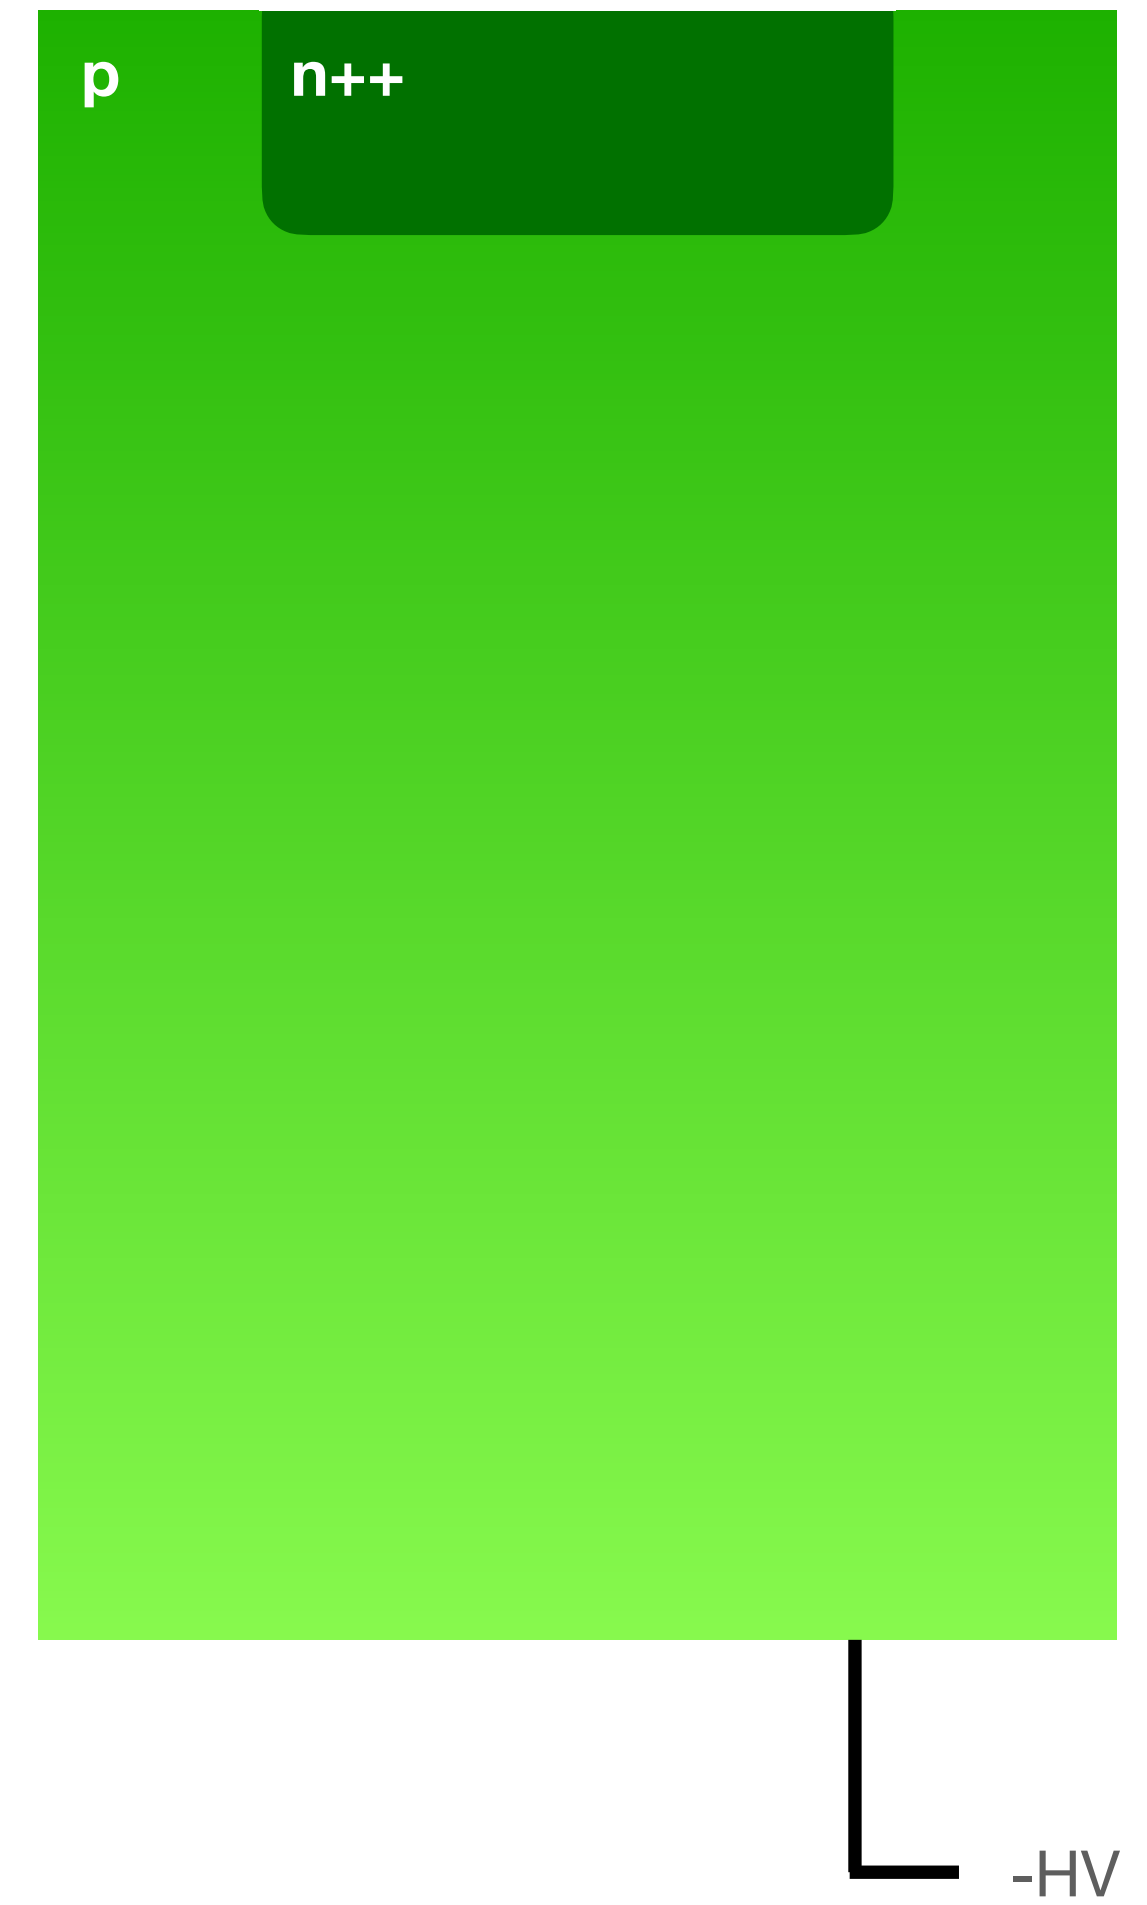


DLTS - signal generation

M.Moll, PhD thesis, 1999


DLTS is based around transient measurements of occupied traps within the semiconductor

- The *transient* part relates to the relaxation of the system, which starts off under reverse bias
- Traps are often filled by pulsing a voltage across the sensor - though they can be filled optically as for TSC - which fills all of the traps with majority carriers (reduced depletion) or a mixture of minority and majority carriers (forward bias)
- The sensor is returned to full depletion and the change in capacitance measured - **the capacitance change tells us if the defects were hole or electron traps**

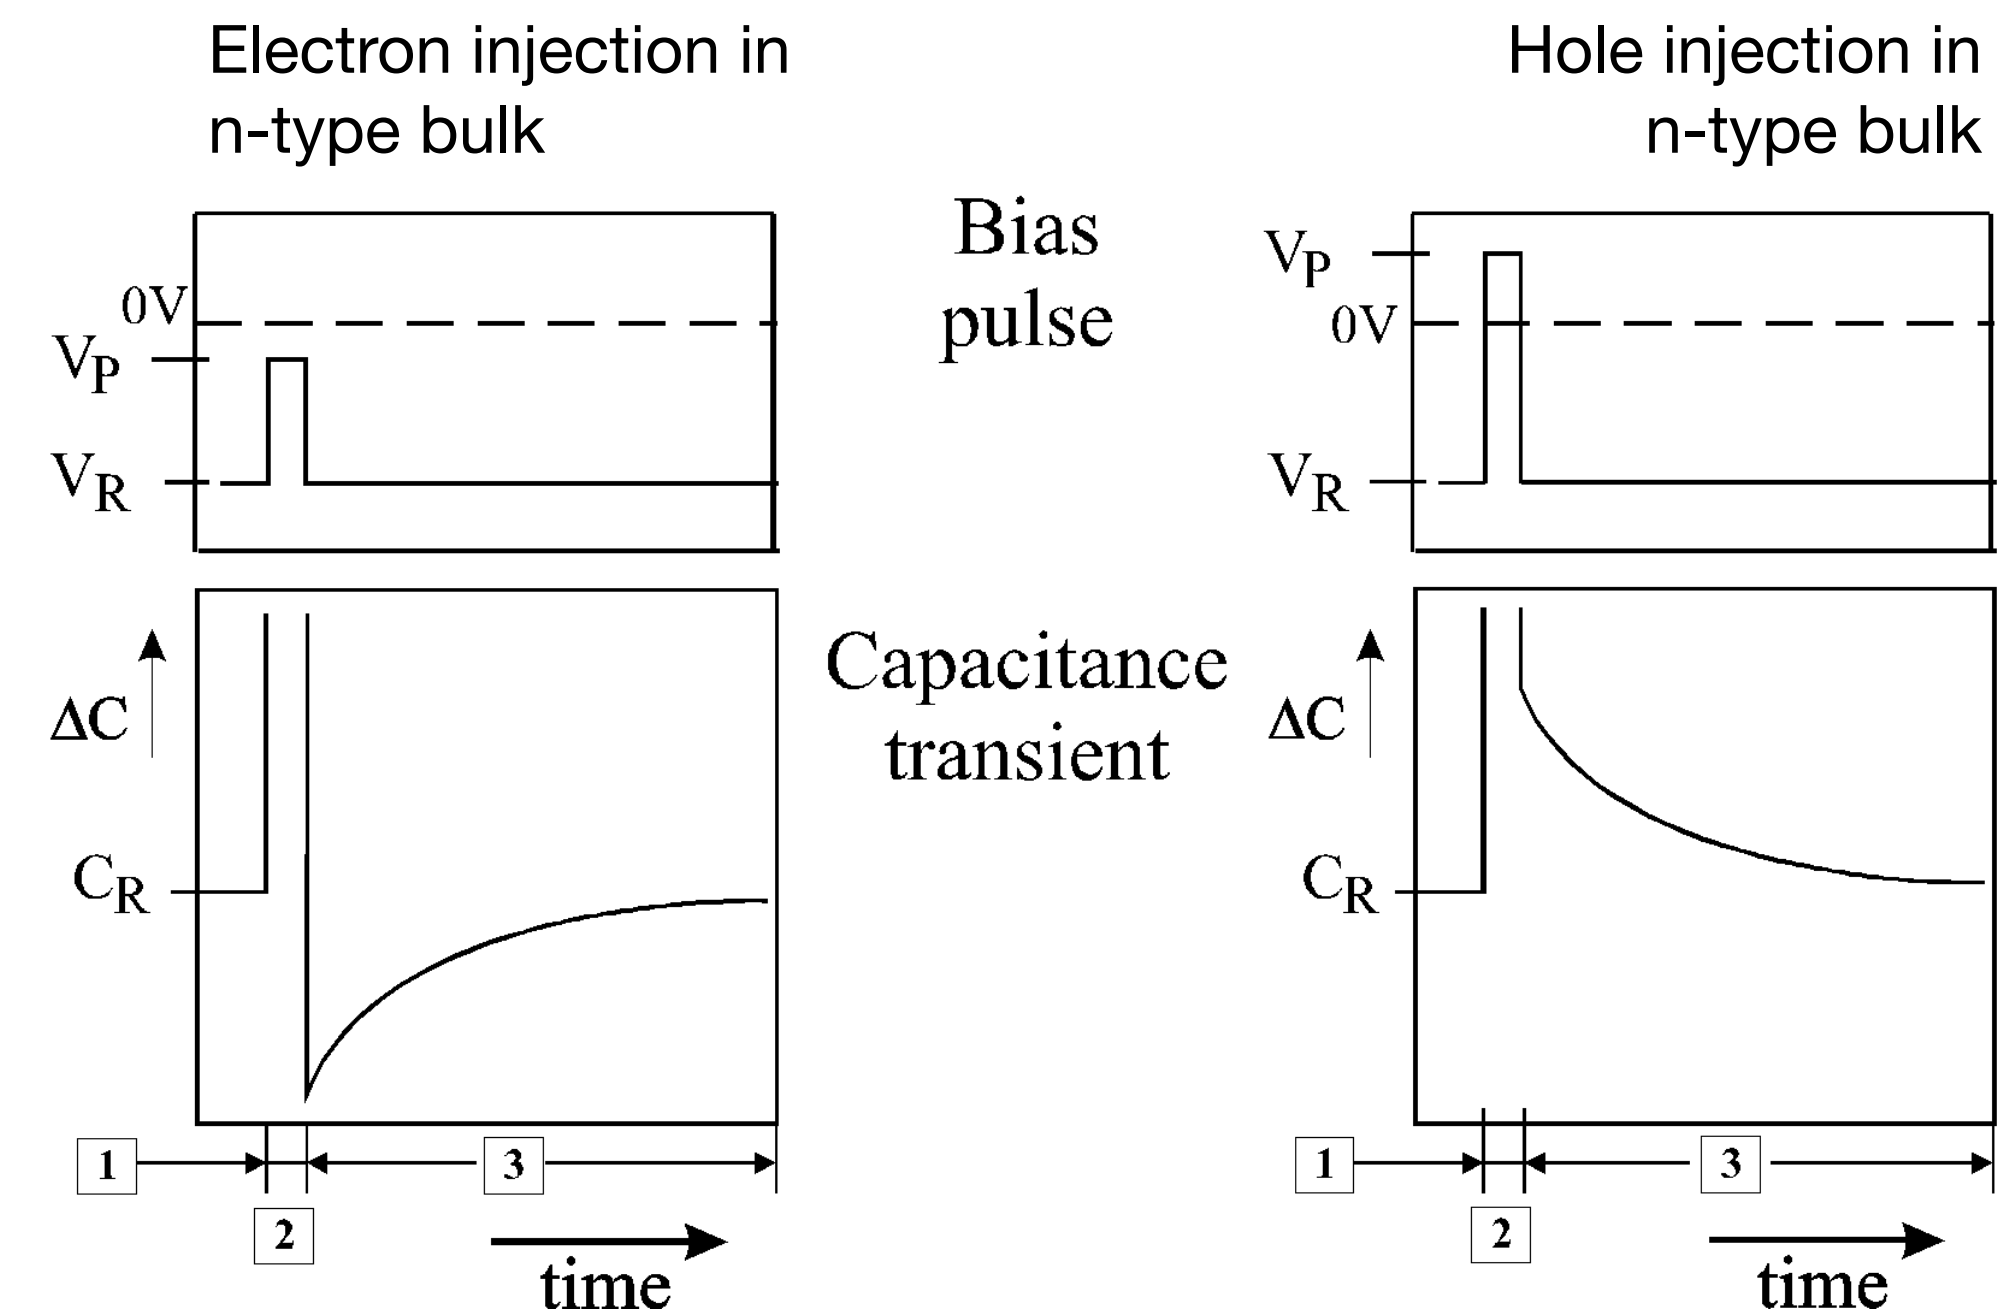



Analysing the data from DLTS can be done in several ways

- One of the simplest/most straightforward is to basically compare the capacitance shortly after the end of the voltage pulse with the steady-state capacitance some time later
- This is usually called the *double boxcar* approach
- Comparing this value versus temperature gives similar peak formation as TSC, but with information on the trapped carrier type

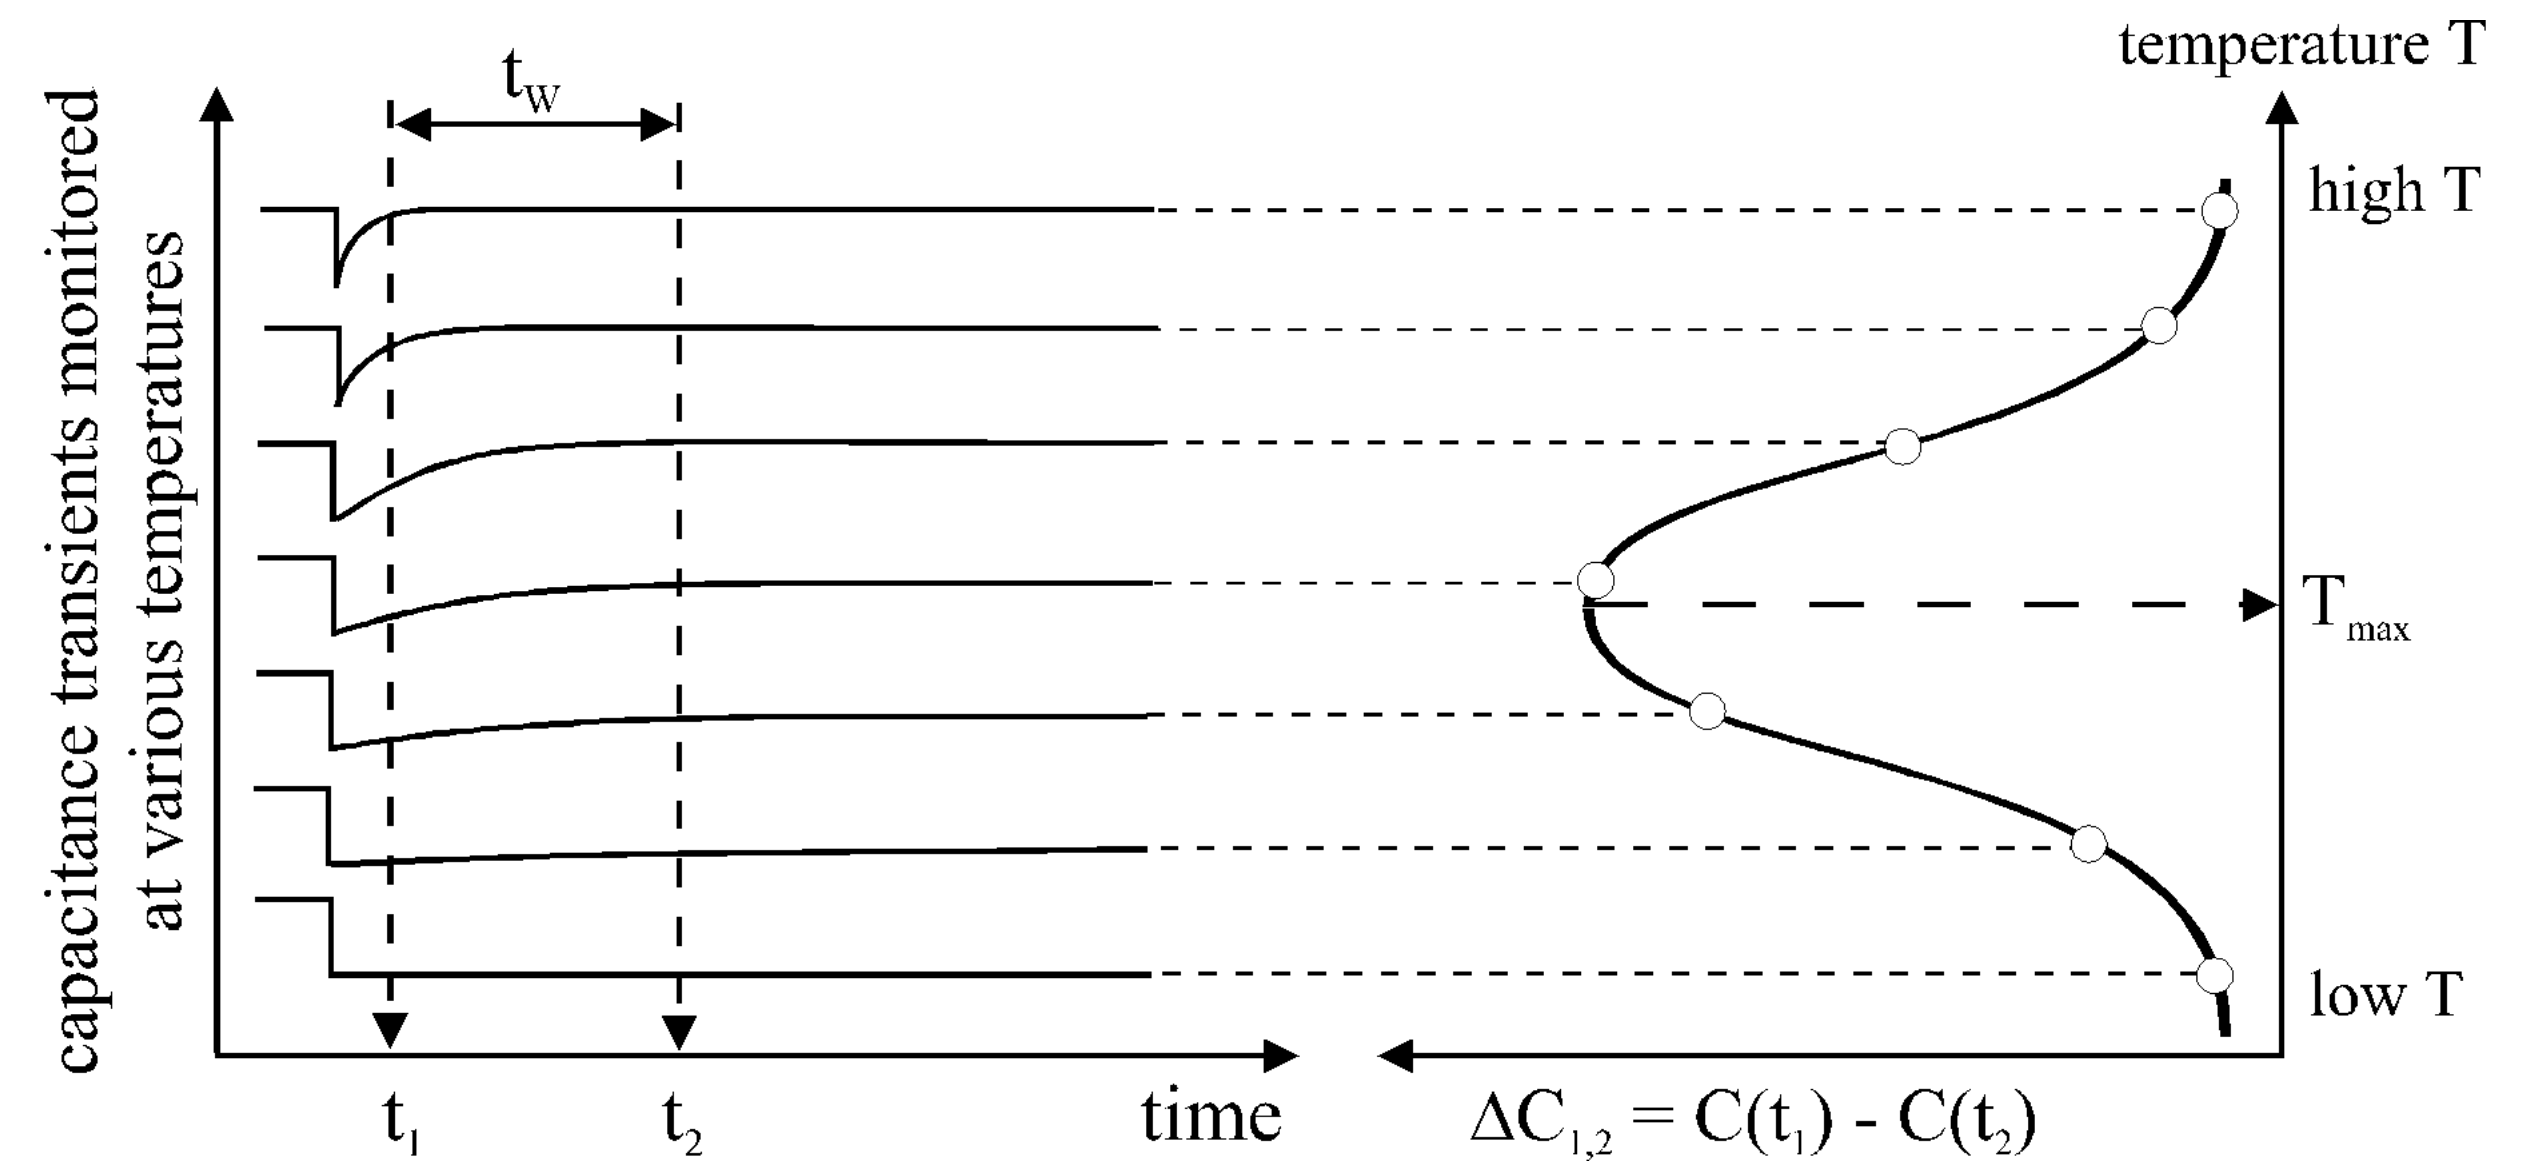


An alternative to the double boxcar method is effectively Fourier analysis of the measured transient capacitance

- Correlator functions defined for the time window T_w of the measurement

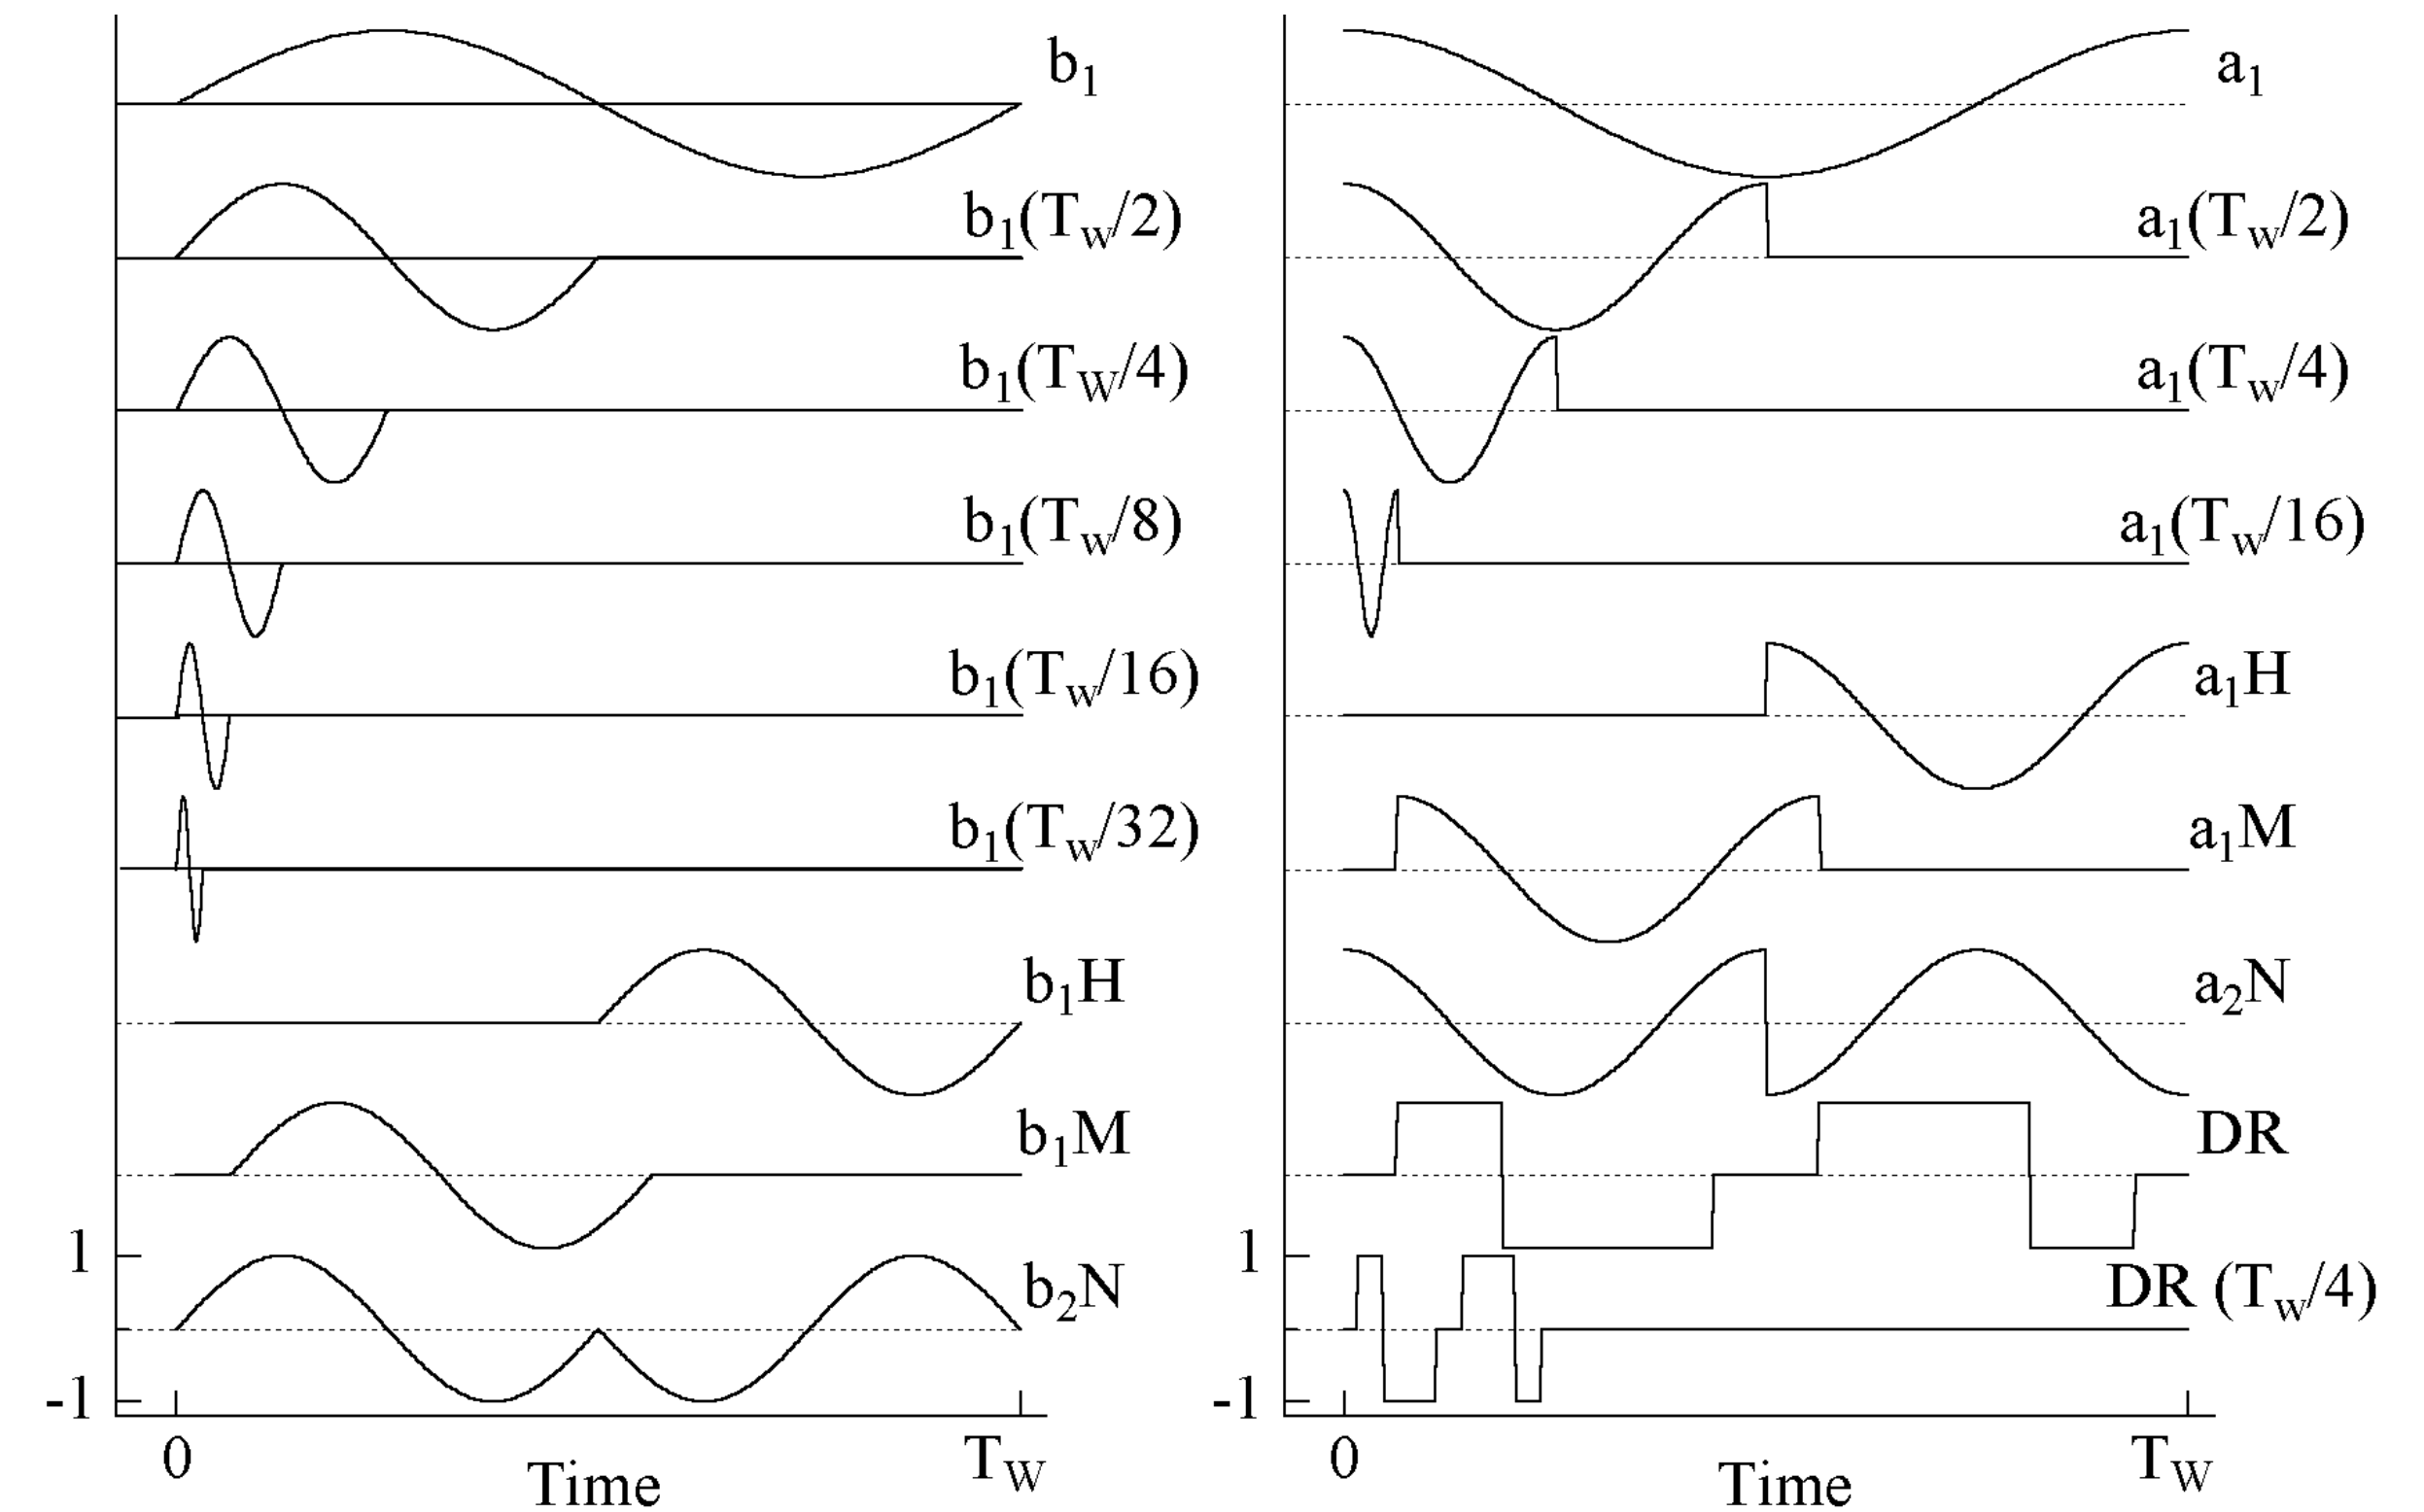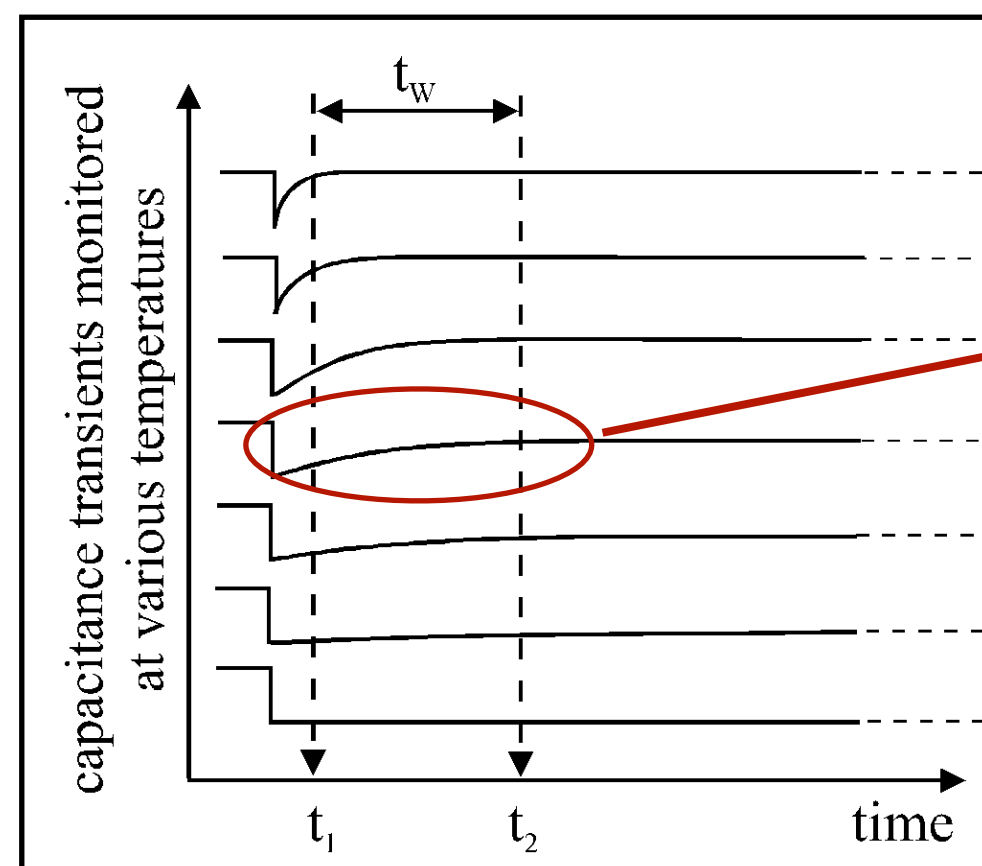

An alternative to the double boxcar method is effectively Fourier analysis of the measured transient capacitance

- Correlator functions defined for the time window T_W of the measurement
- This gives (in the case on the right) 18 pairs of Temperature and emission rate for each time window, allowing an Arrhenius plot to be produced to extract the activation energy

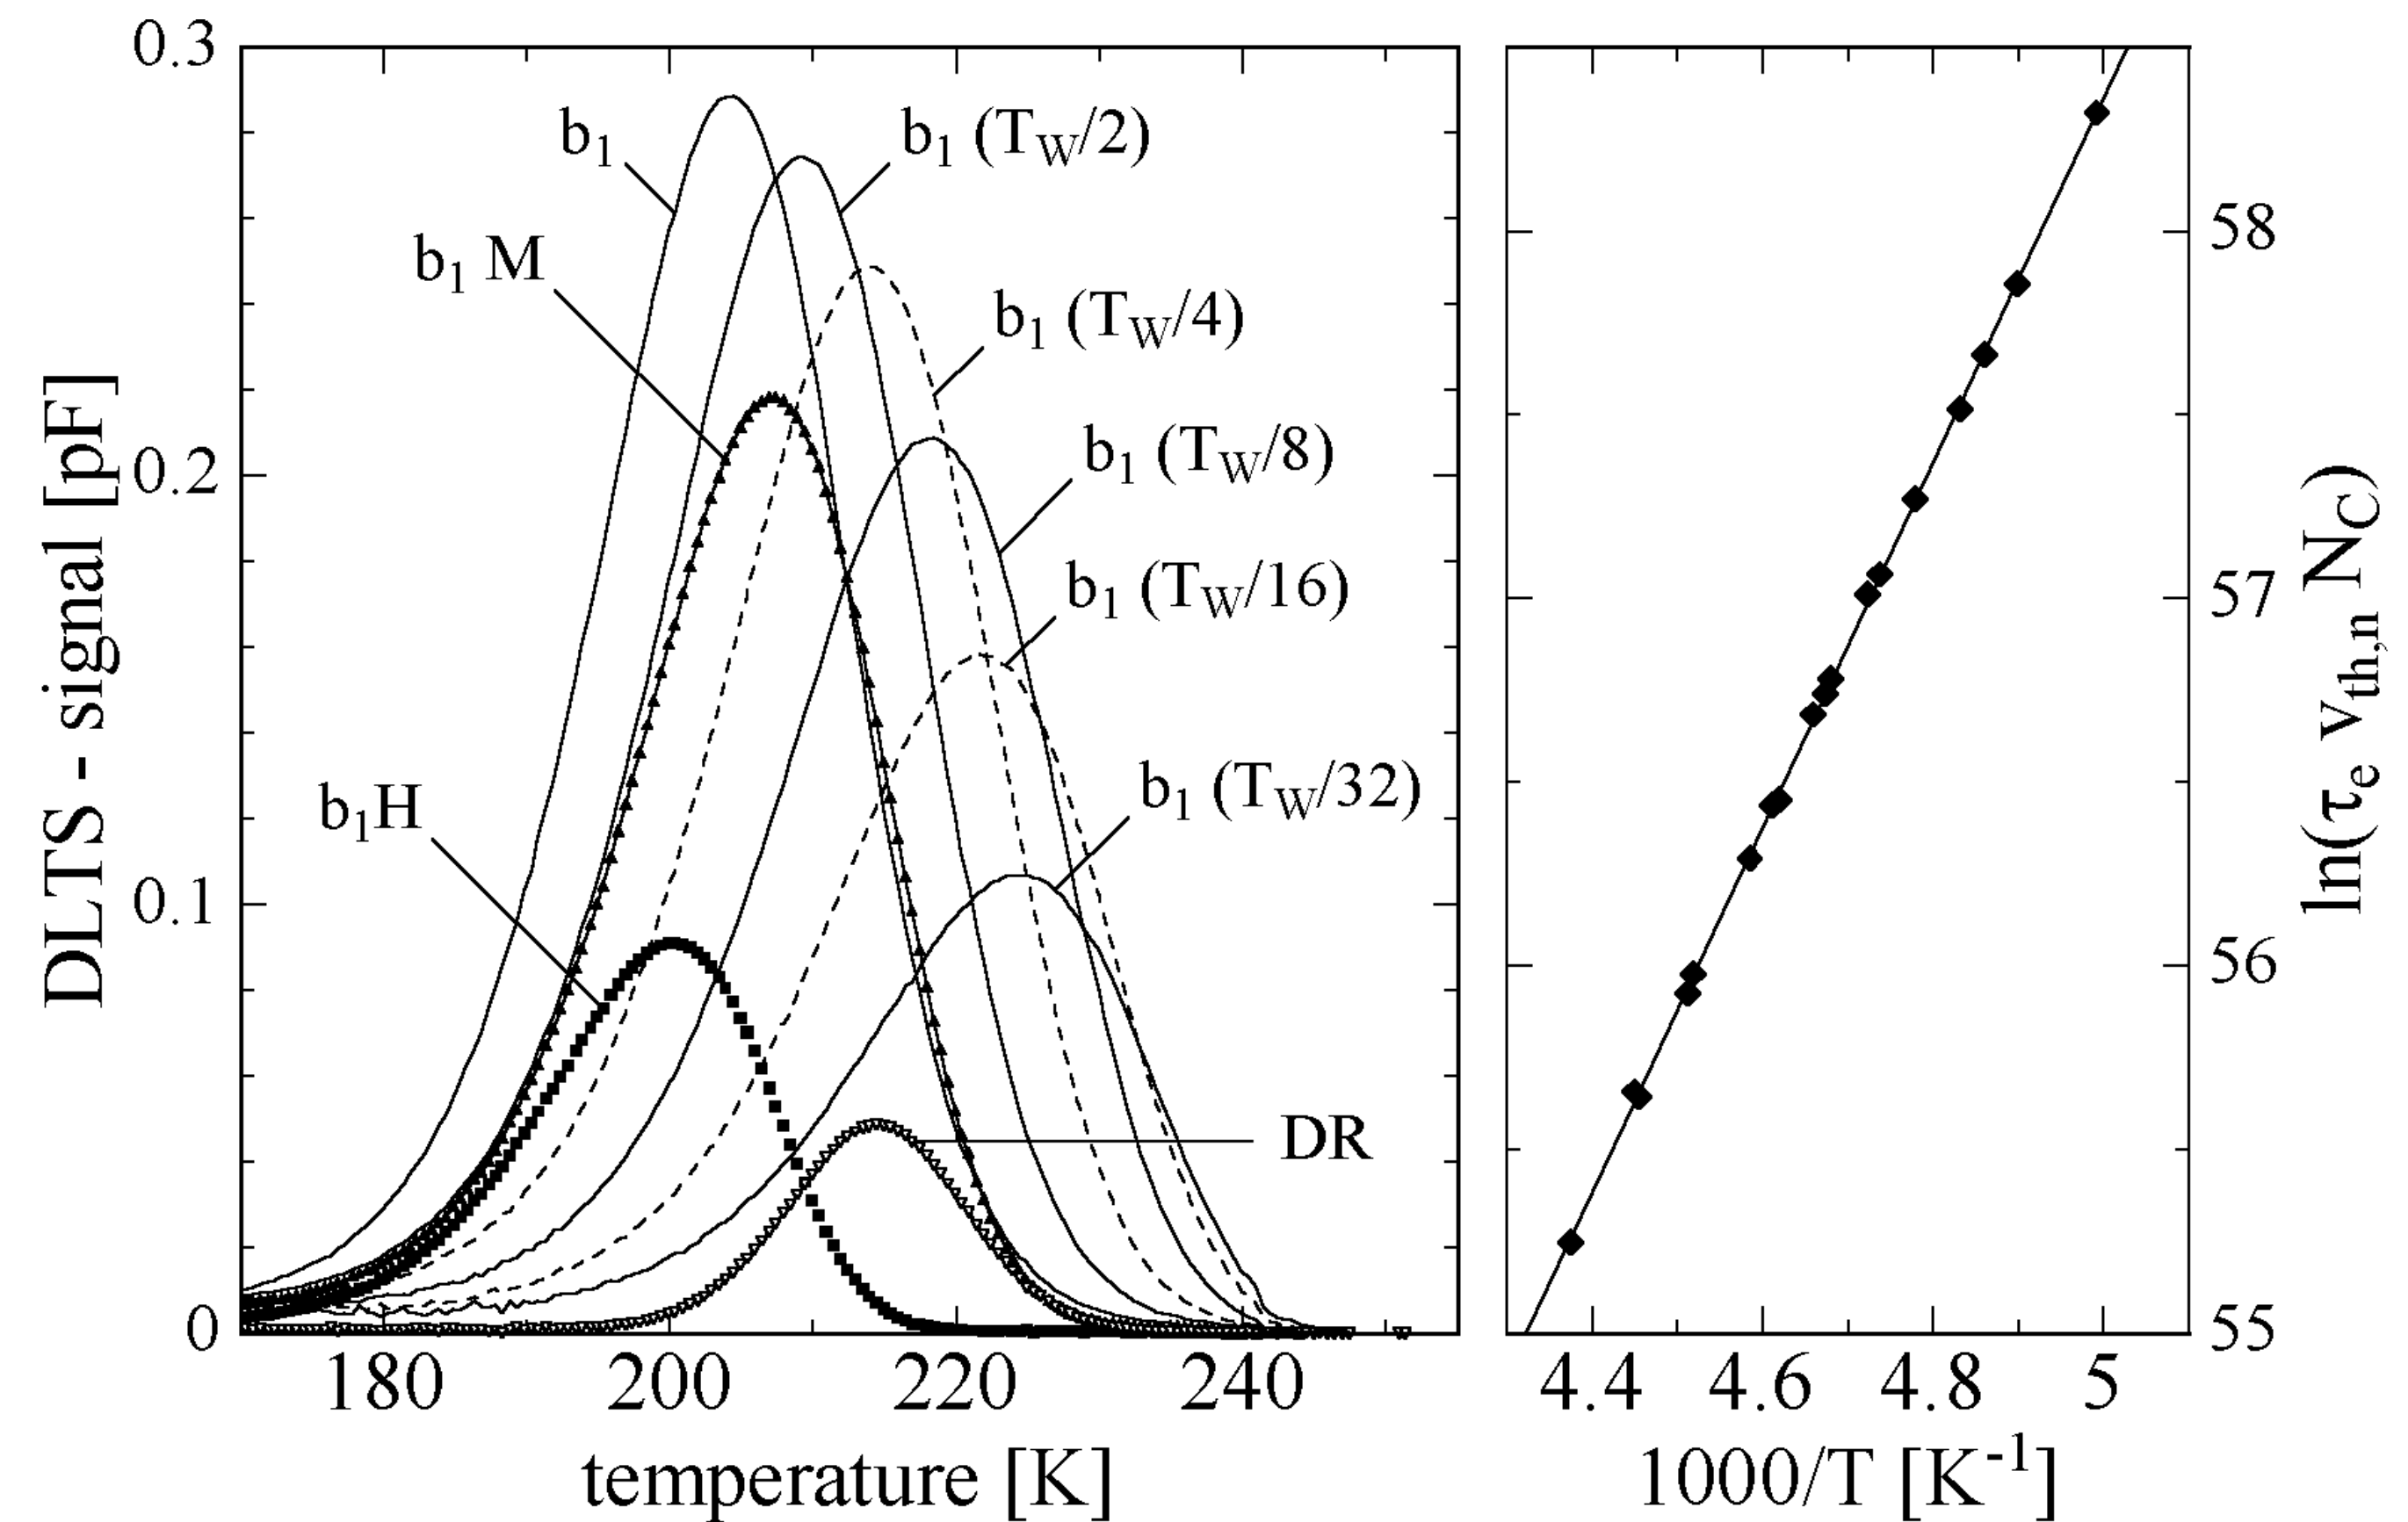


Typical DLTS plots

F.Hönniger, PhD thesis, 2007

Plotting a single of the extracted variables versus temperature gives us a typical DLTS plot

- As before, it is important to understand the bulk material, the injection method, the detector state during cooling, the analysis...

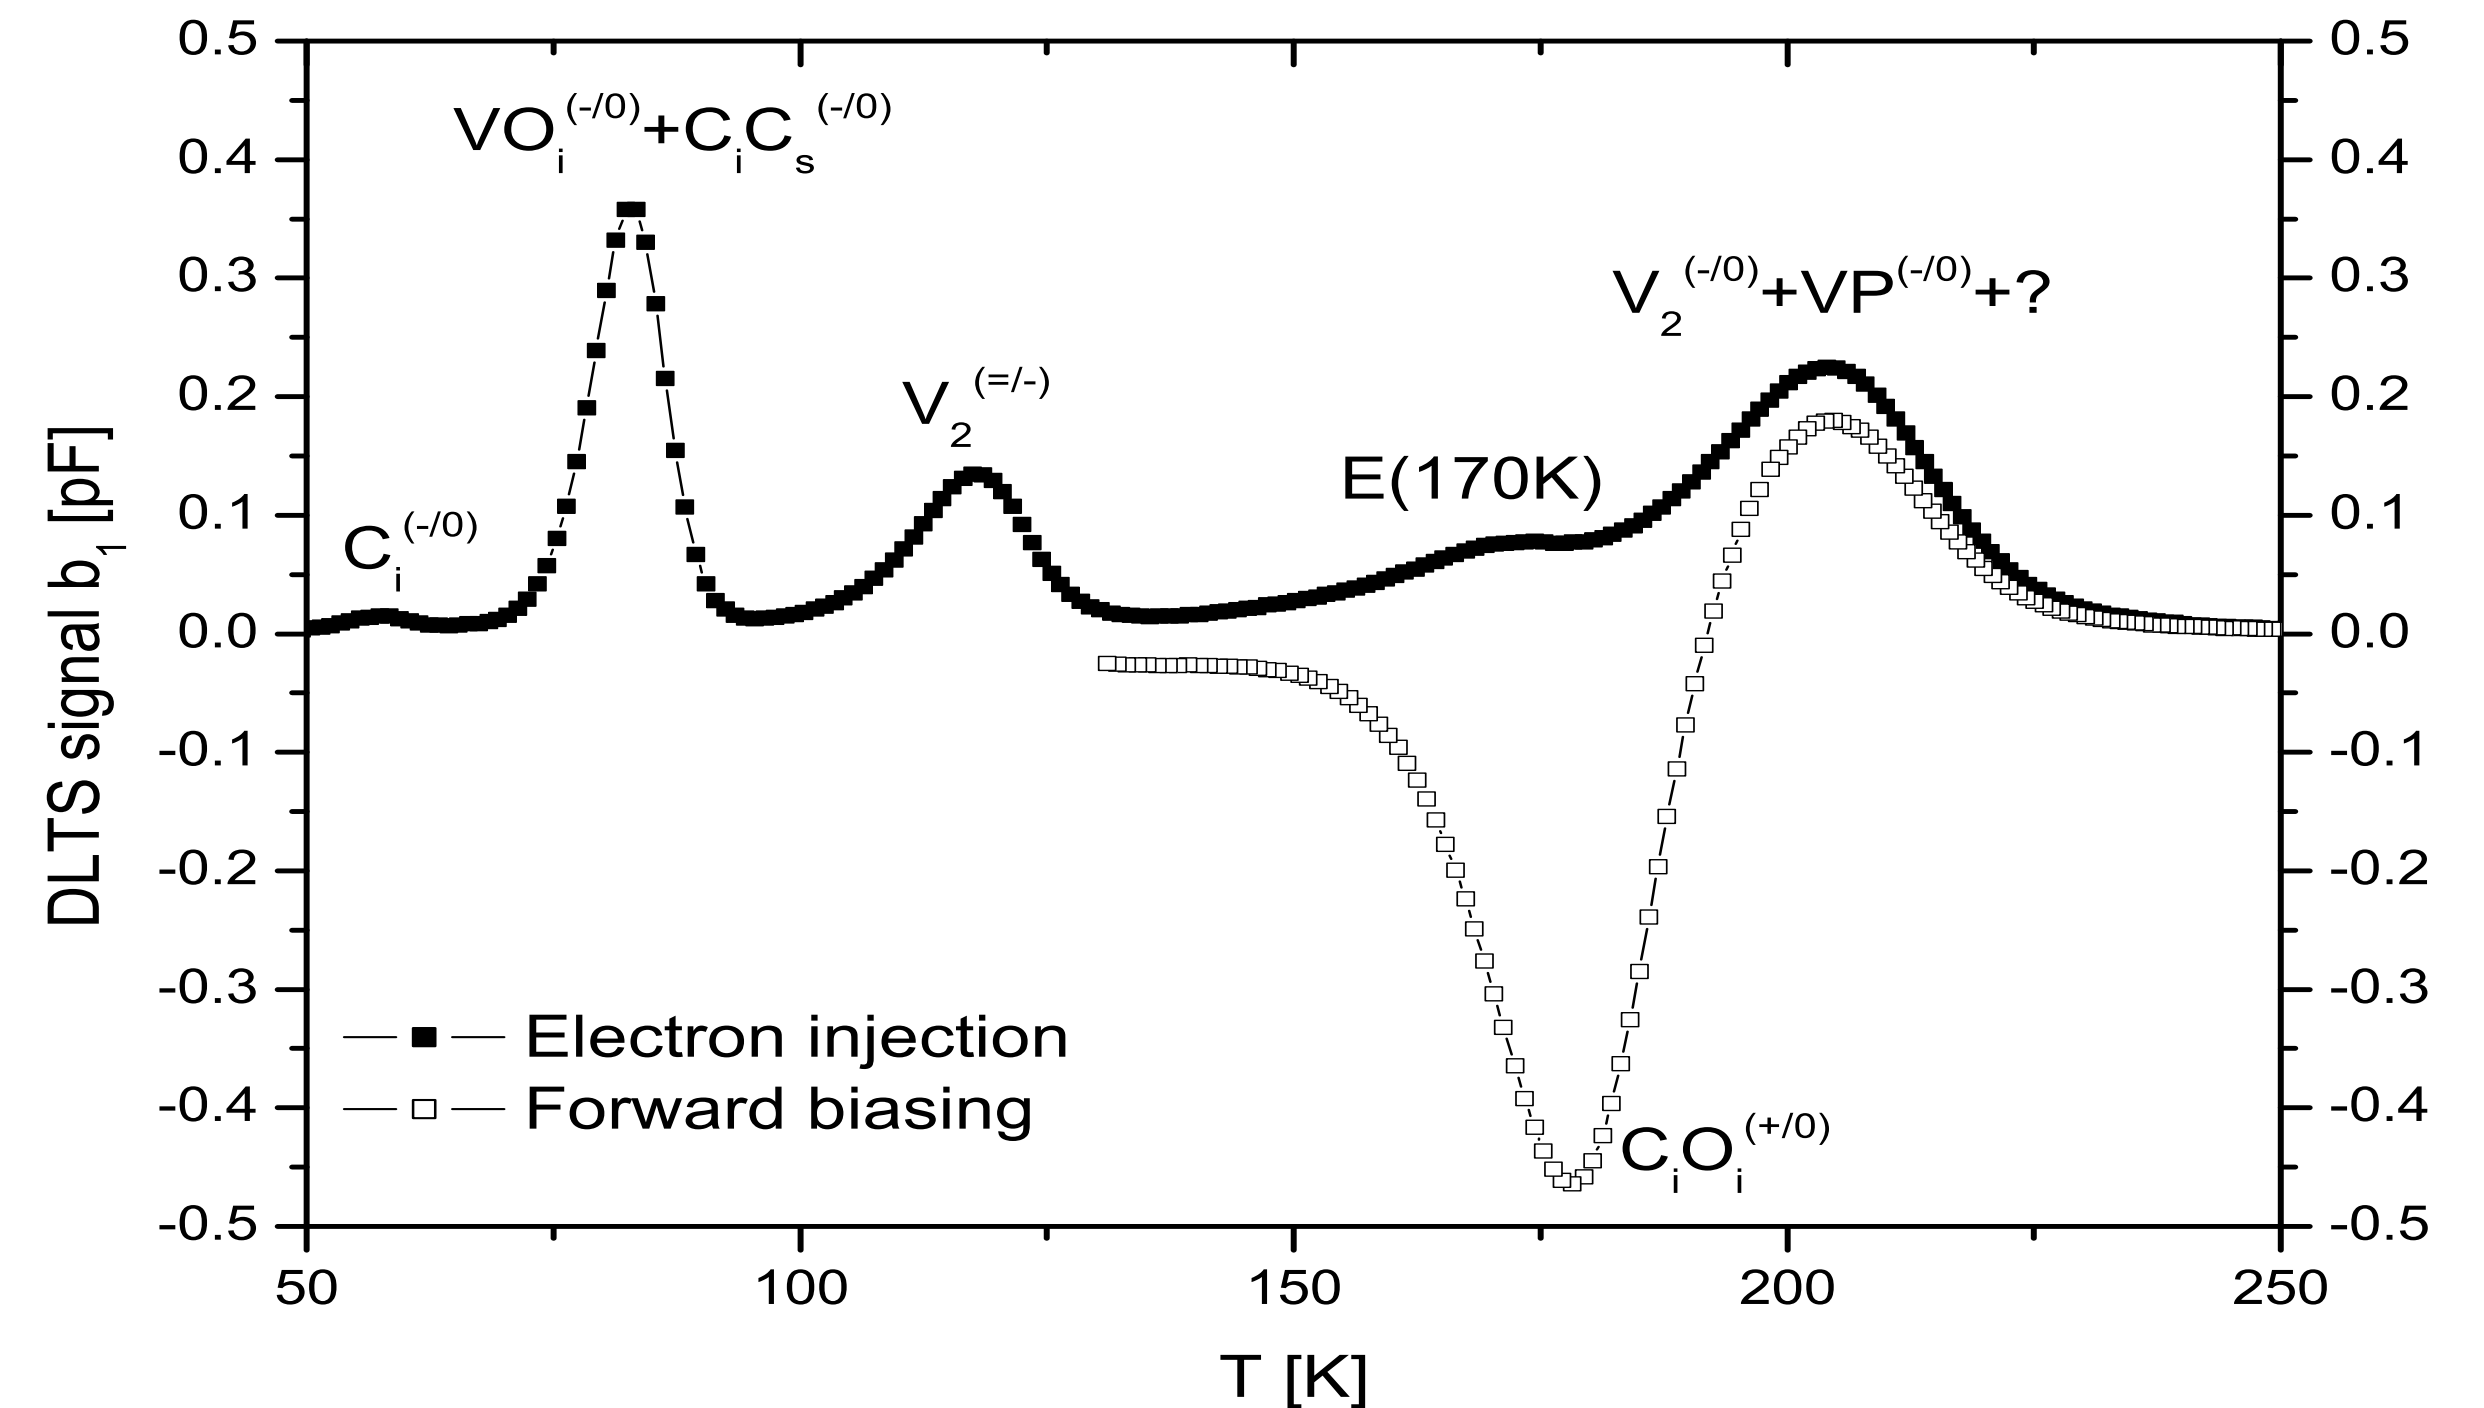


Typical DLTS plots


M.Moll, RD50 Workshop, IP2I Lyon, 2021

Plotting a single of the extracted variables versus temperature gives us a typical DLTS plot

- As before, it is important to understand the bulk material, the injection method, the detector state during cooling, the analysis...
- All of this is before we start trying to analyse which defects are produced by radiation, how they develop with annealing/passivation/whatever else we can think to do to them!

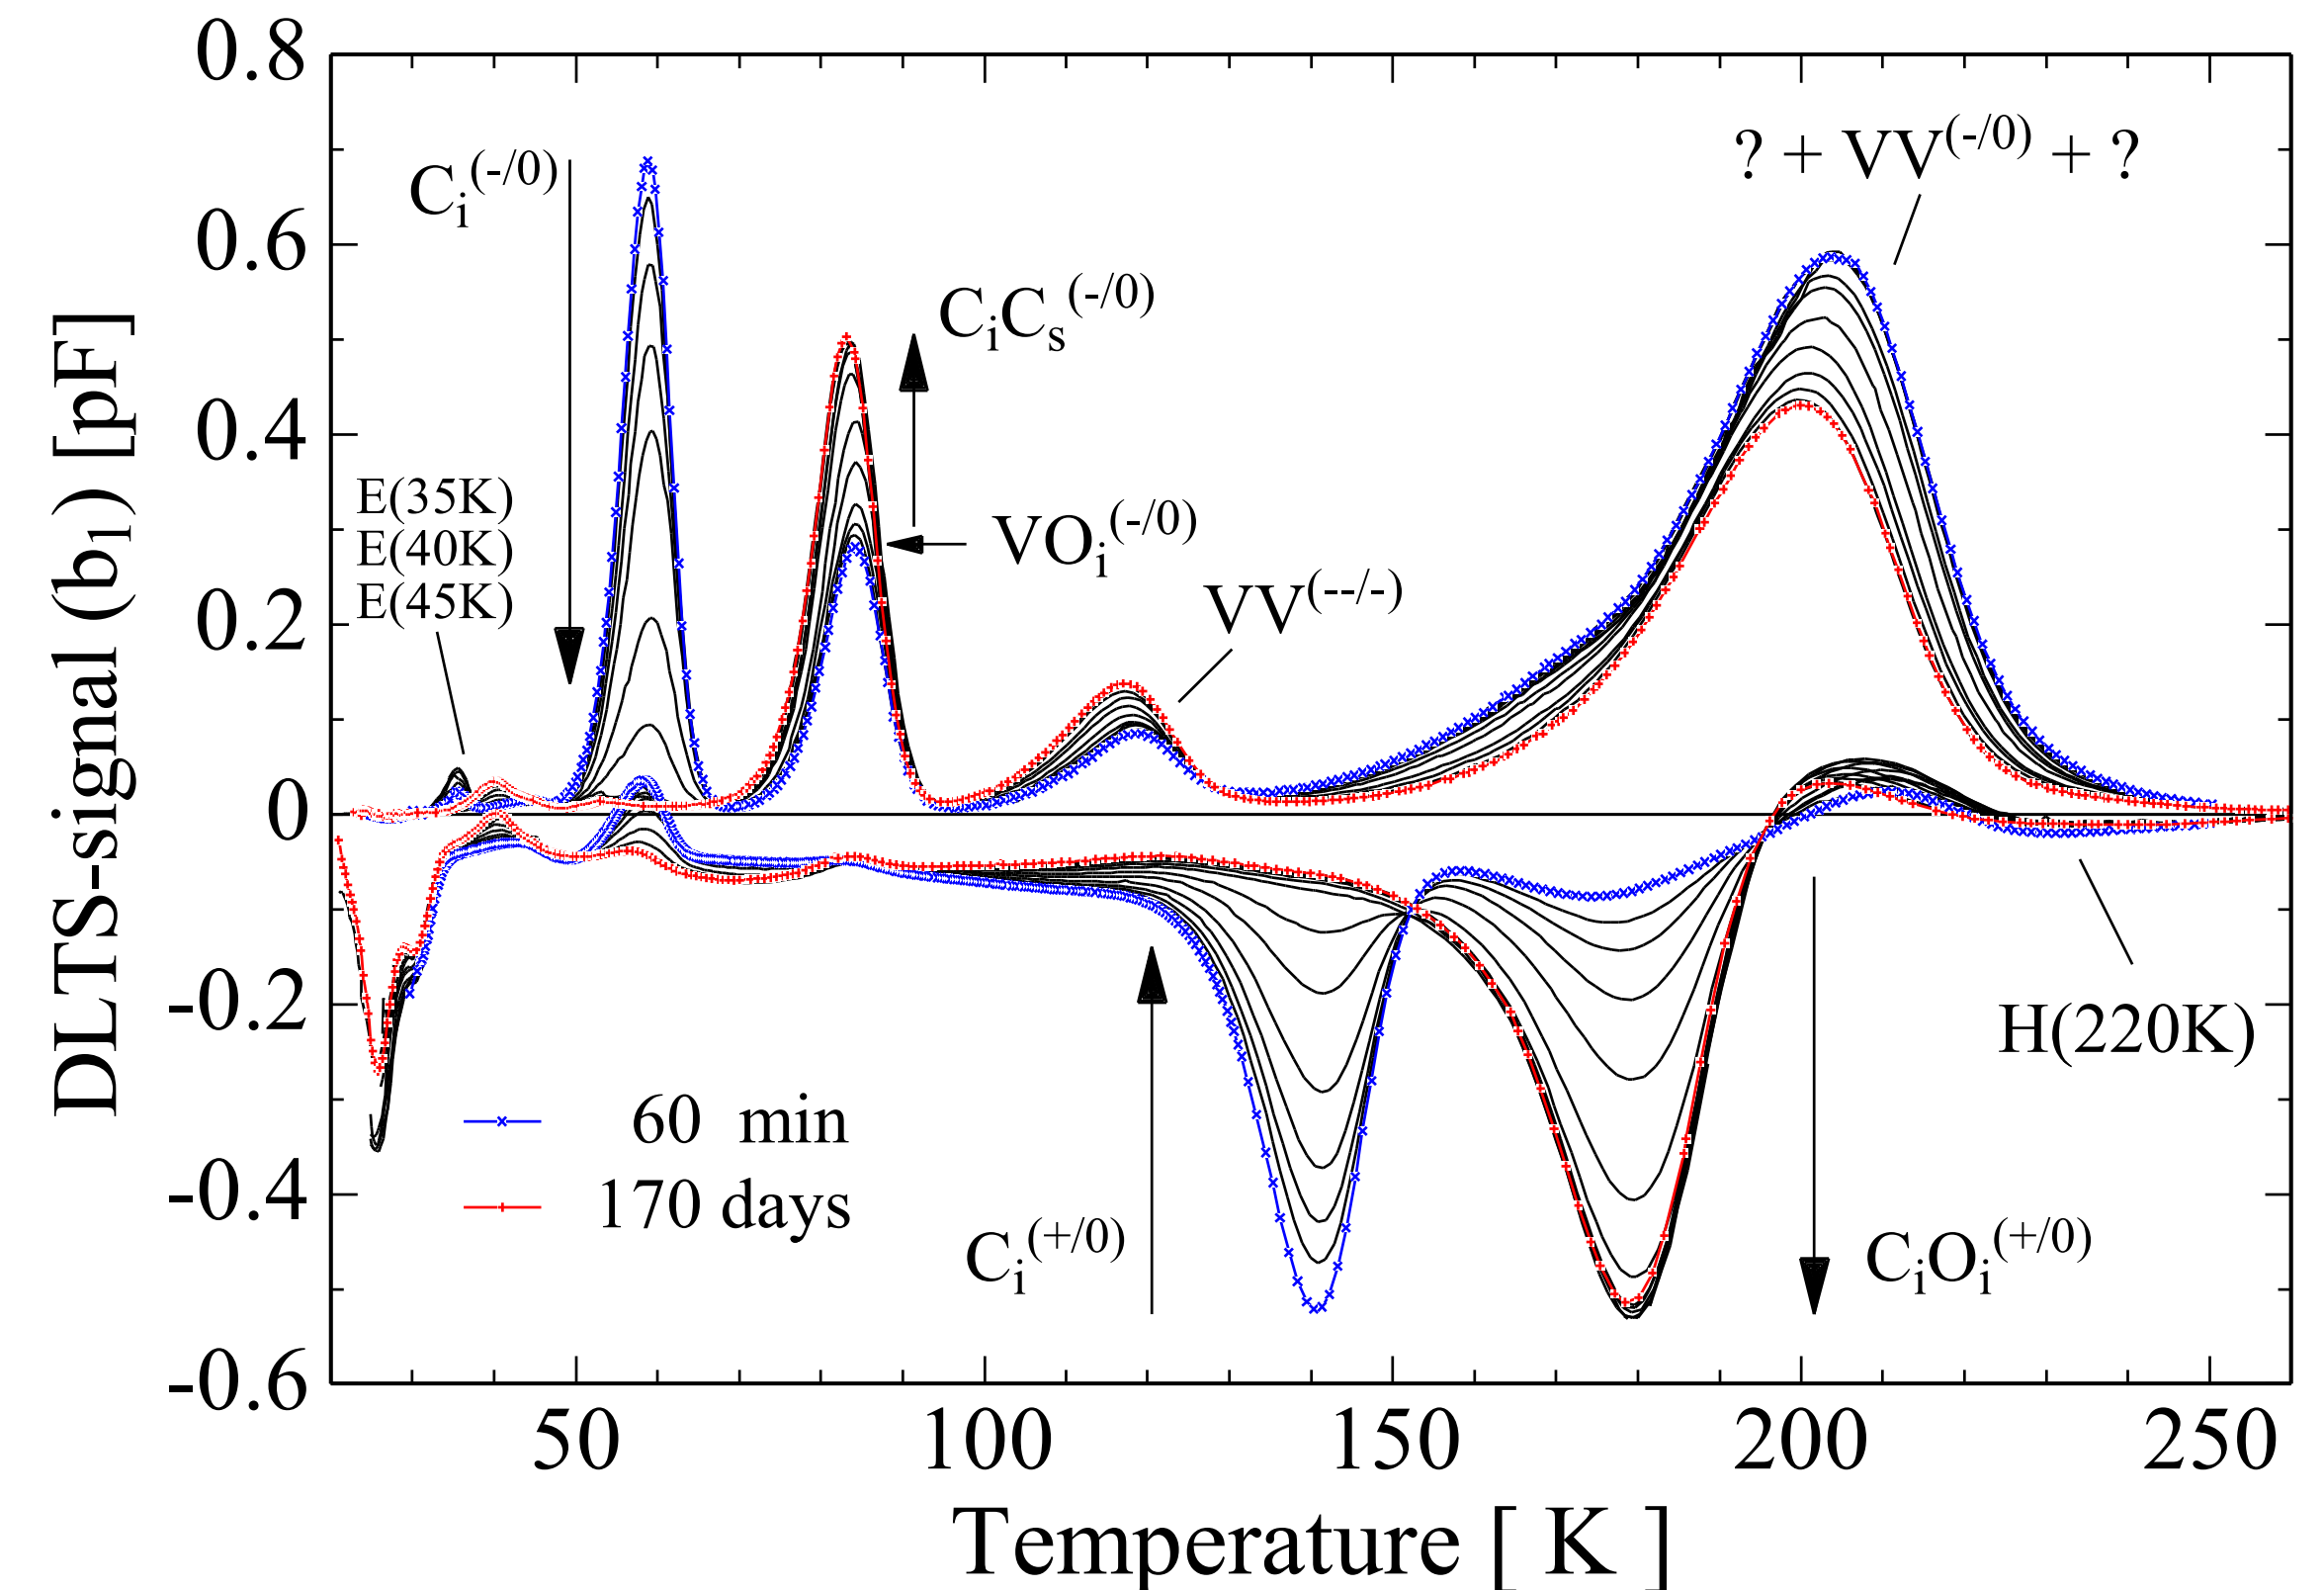


The same effect as was observed for TSC can be seen in DLTS - influence of the electric field on the energy barrier to escape from a trap

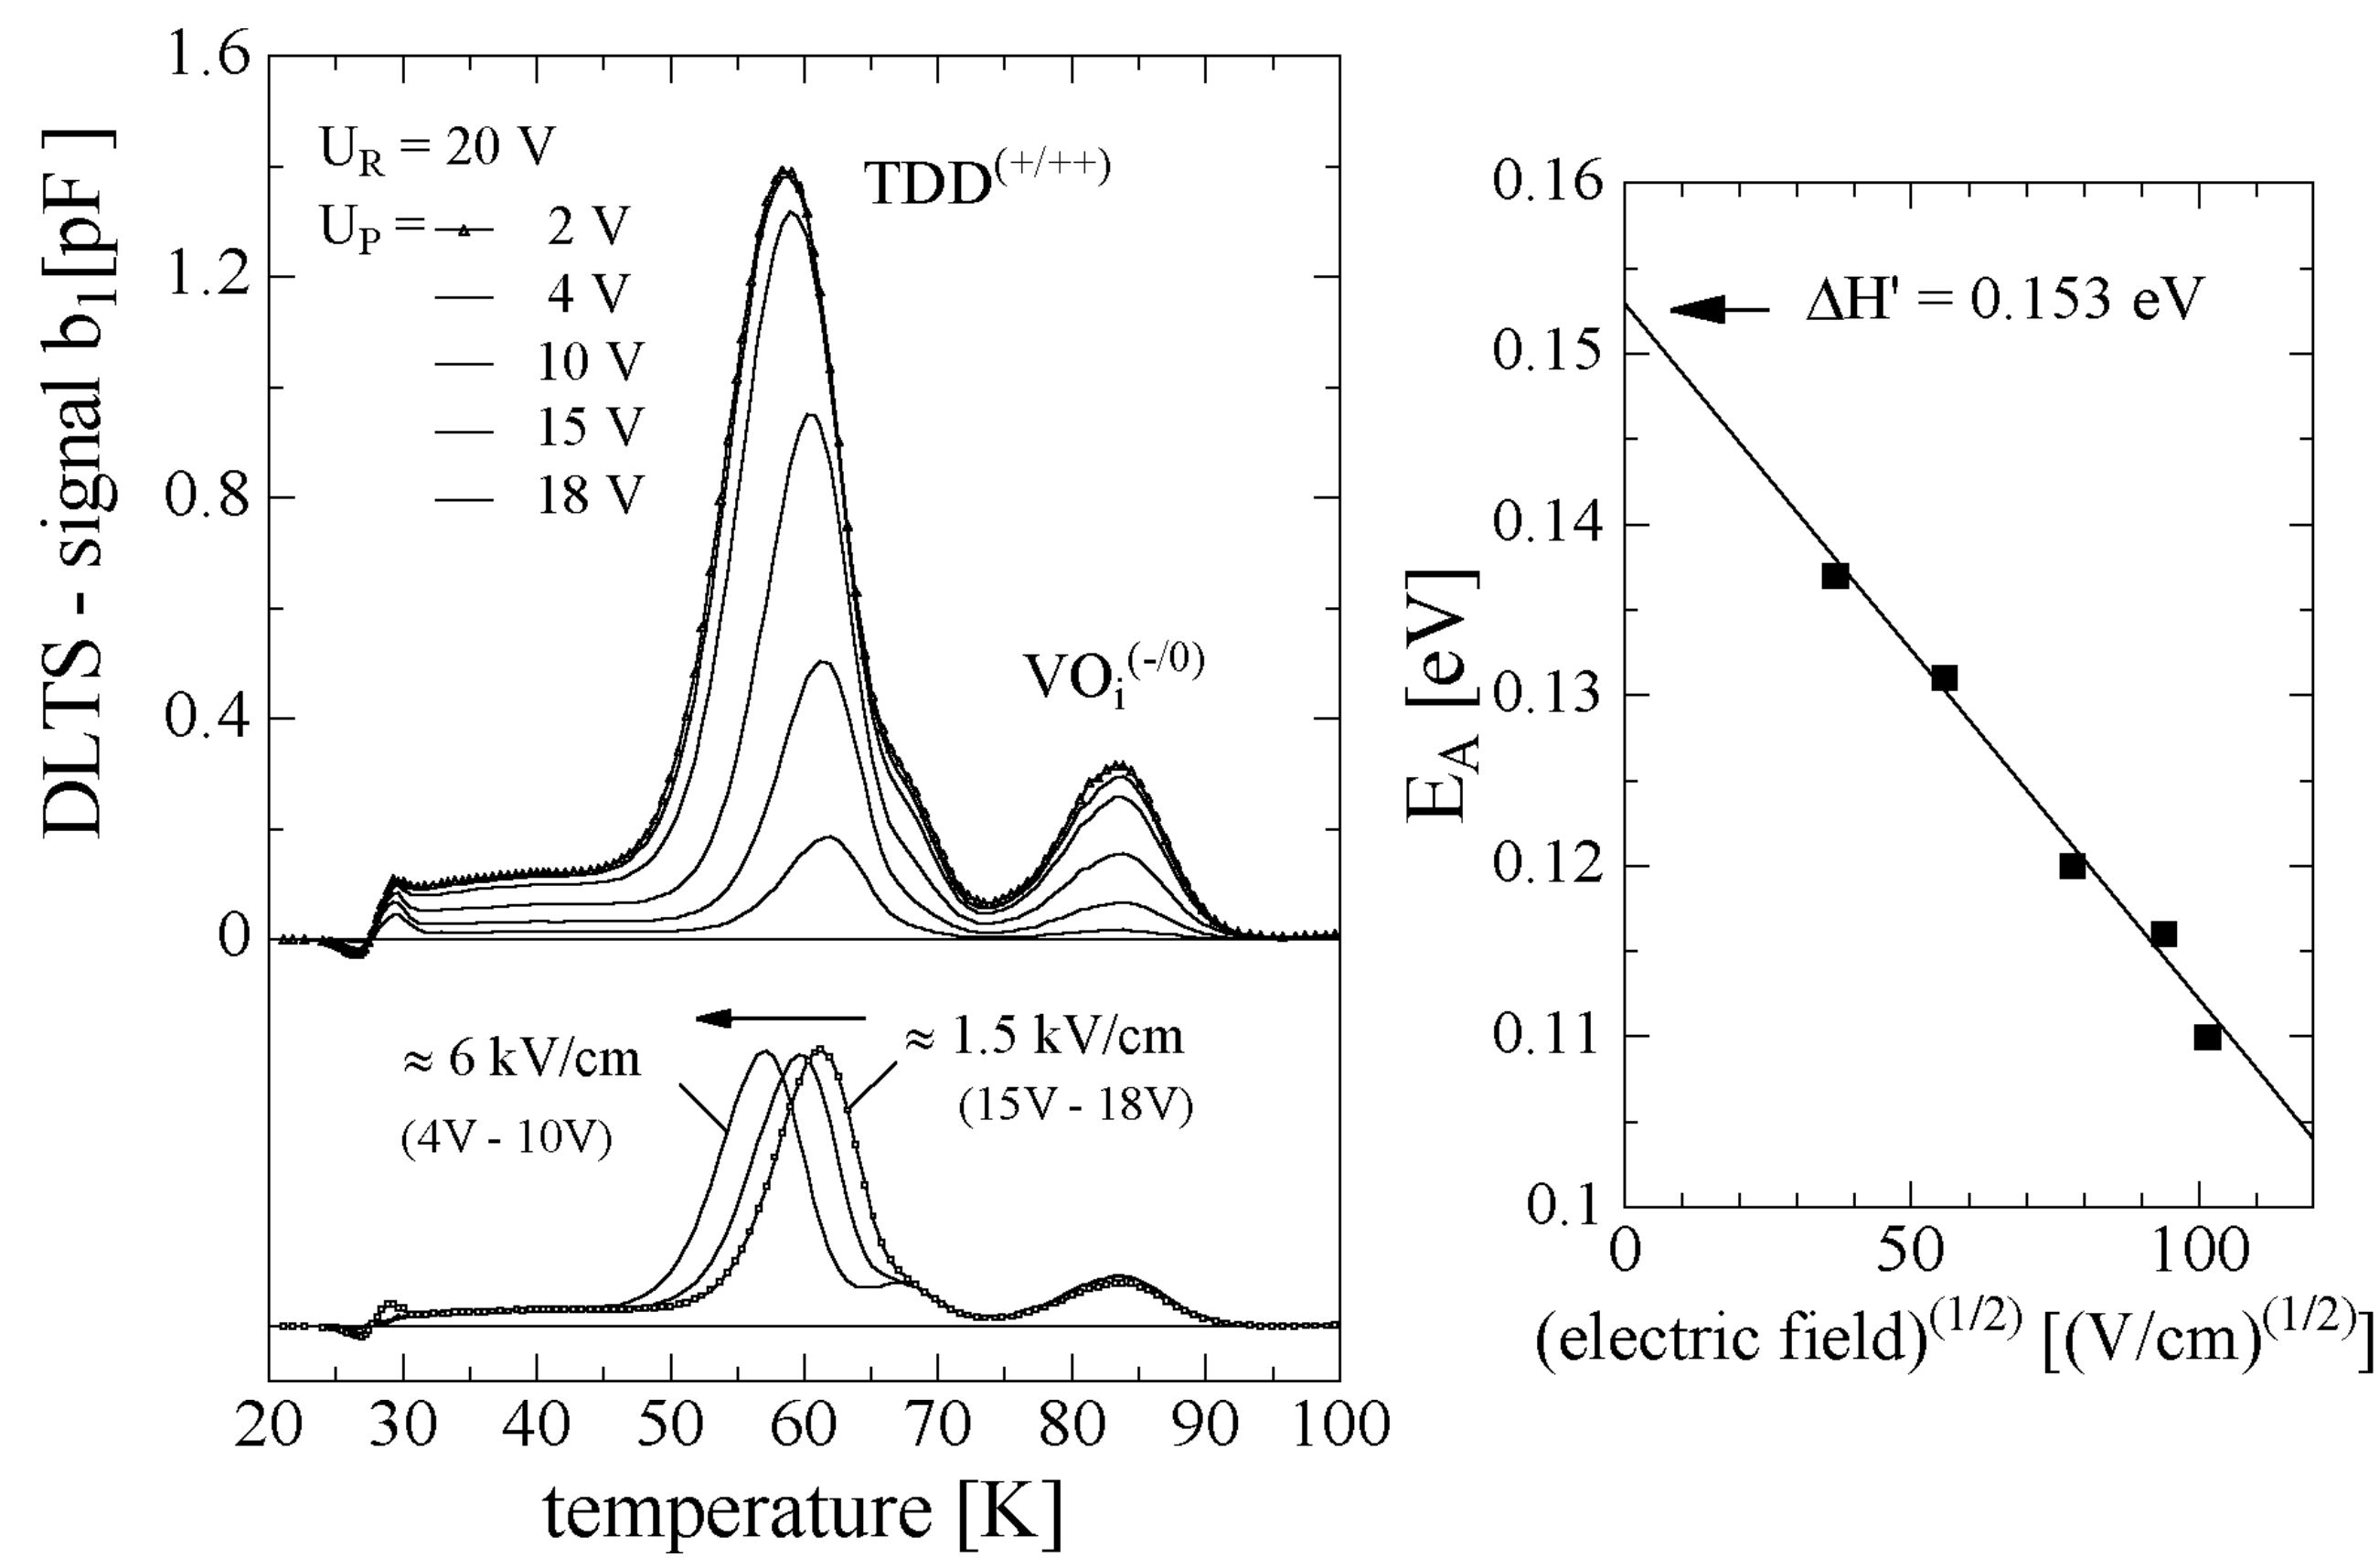



To make things more complicated, some defects exhibit quasi-stable behaviour

- CiCs defect has more than one role - can be an acceptor **or** a donor
- Two spectra shown on the right: minority carrier DLTS for an n-type bulk material (optical trap filling)
- Difference between the curves is the **presence of reverse bias during cooling**

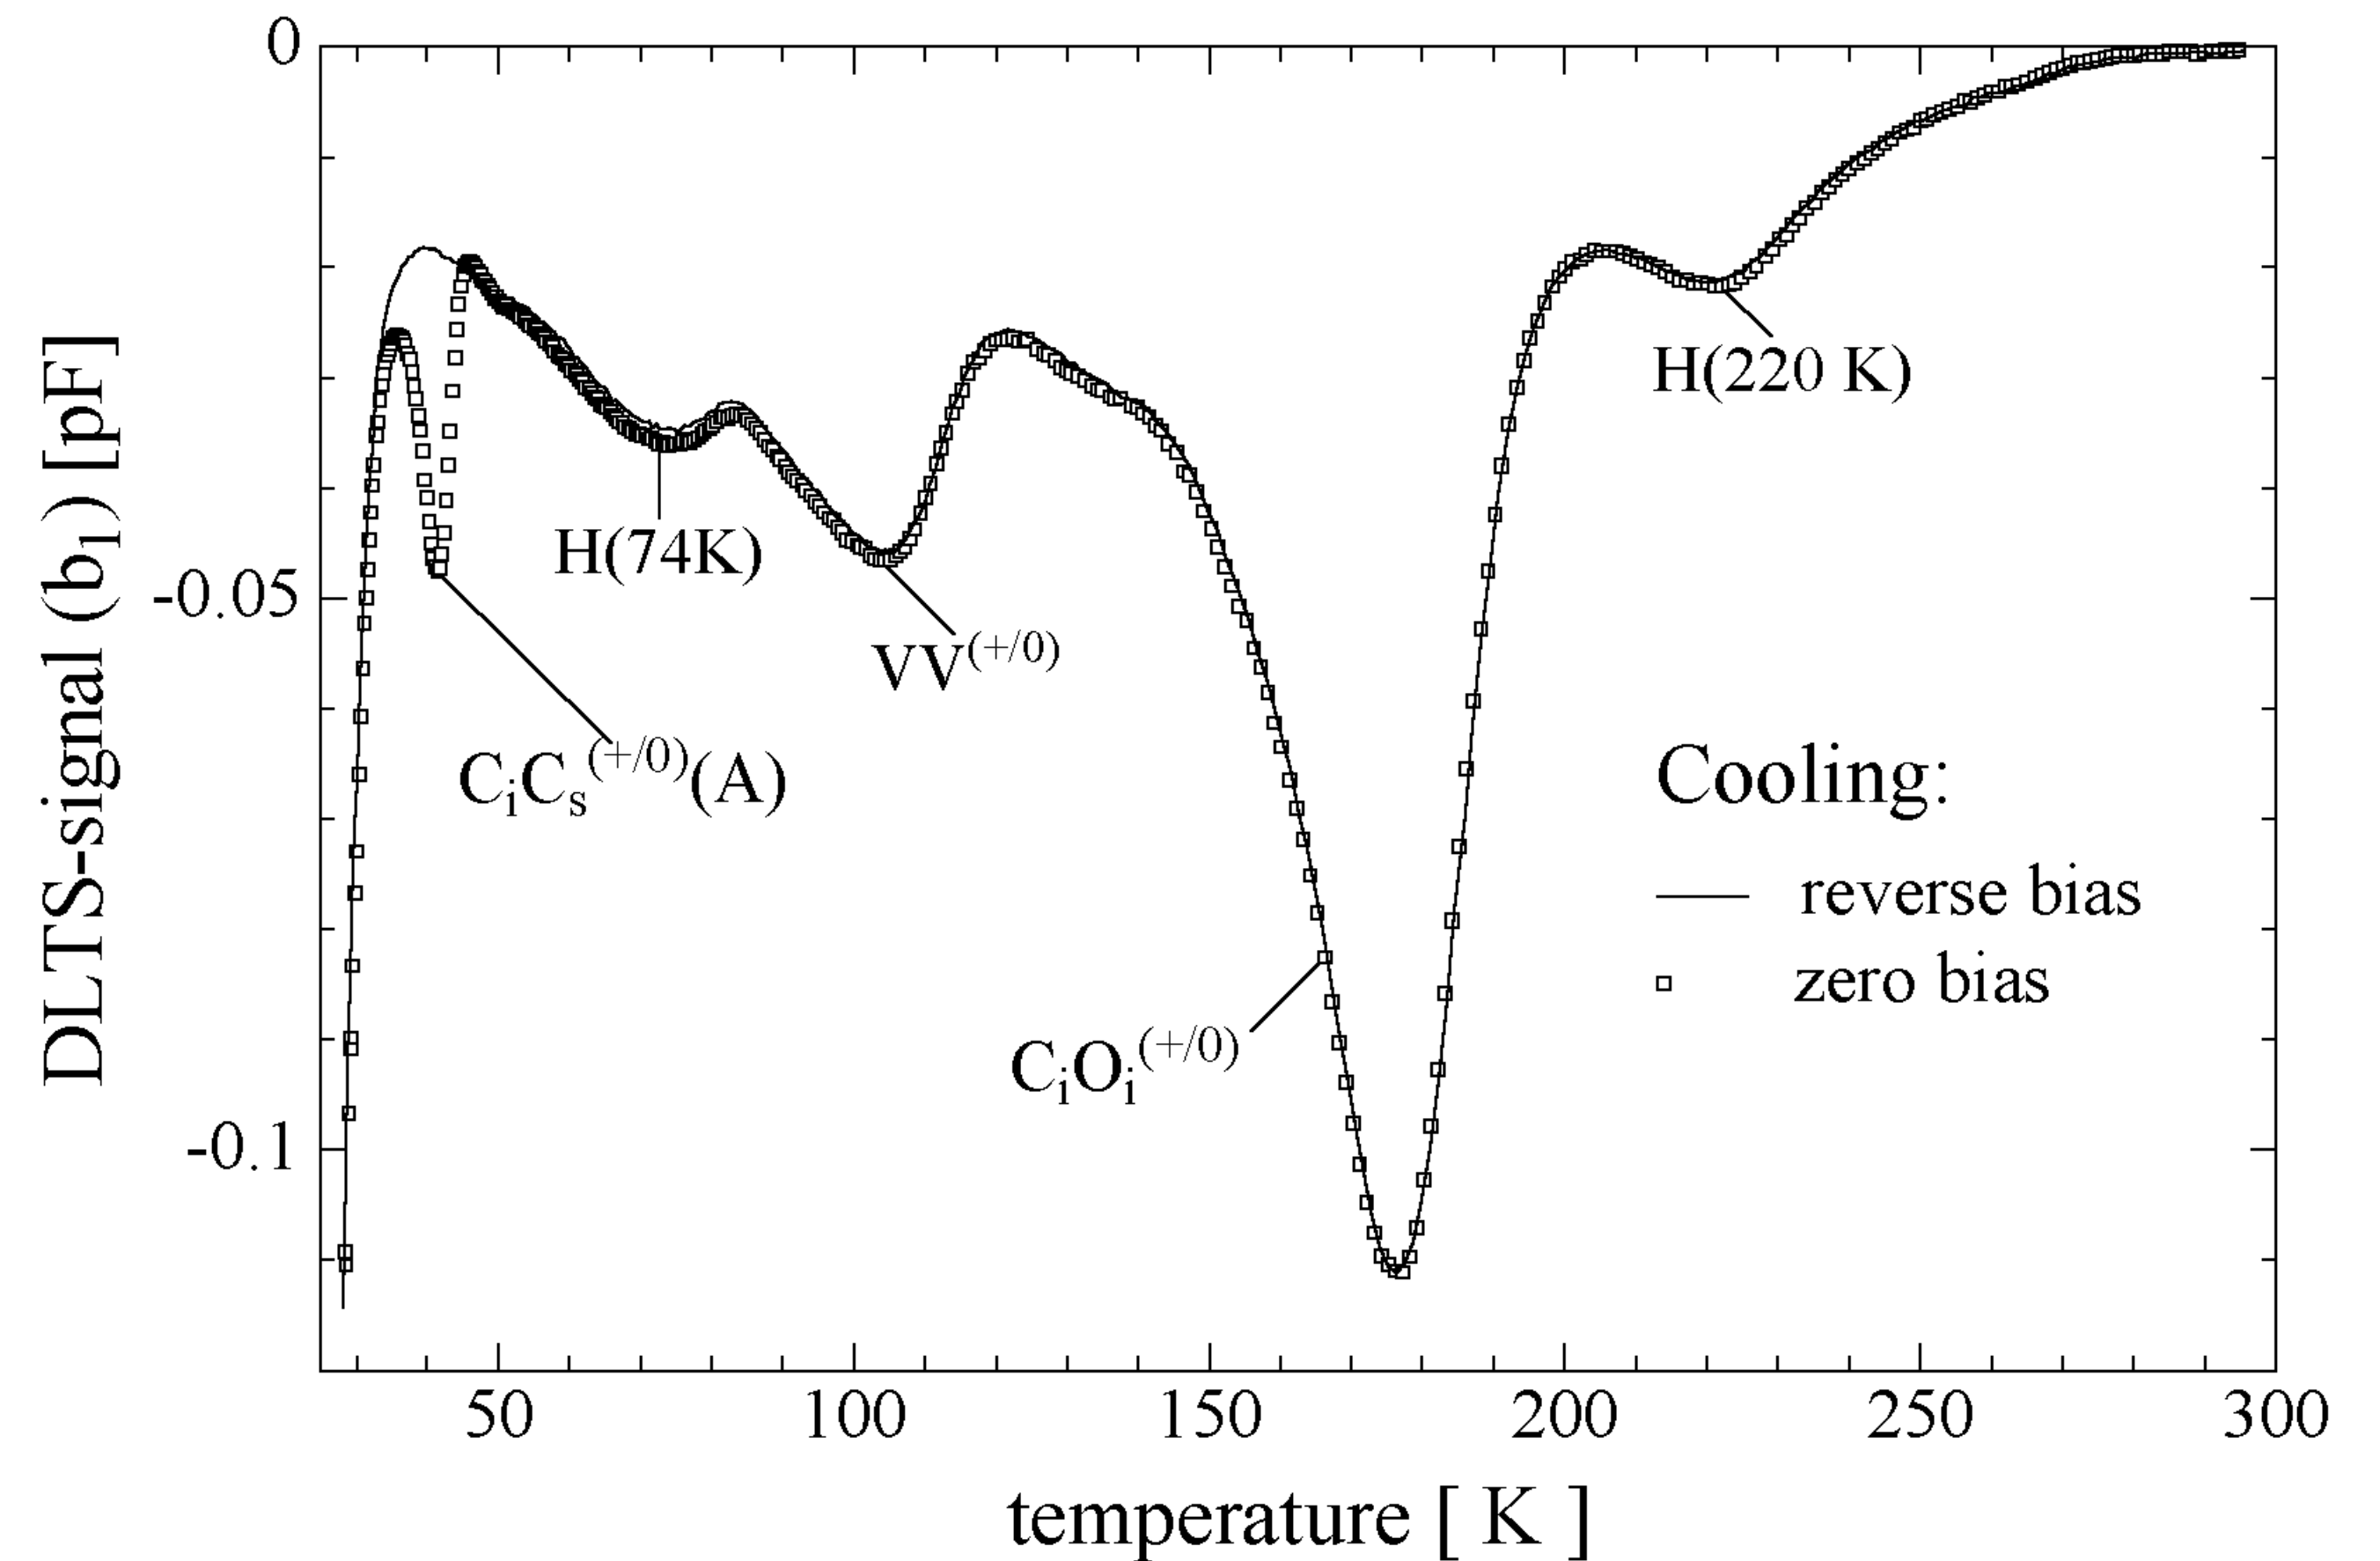

Radiation damage is complicated...

M.Moll, PhD thesis, 1999

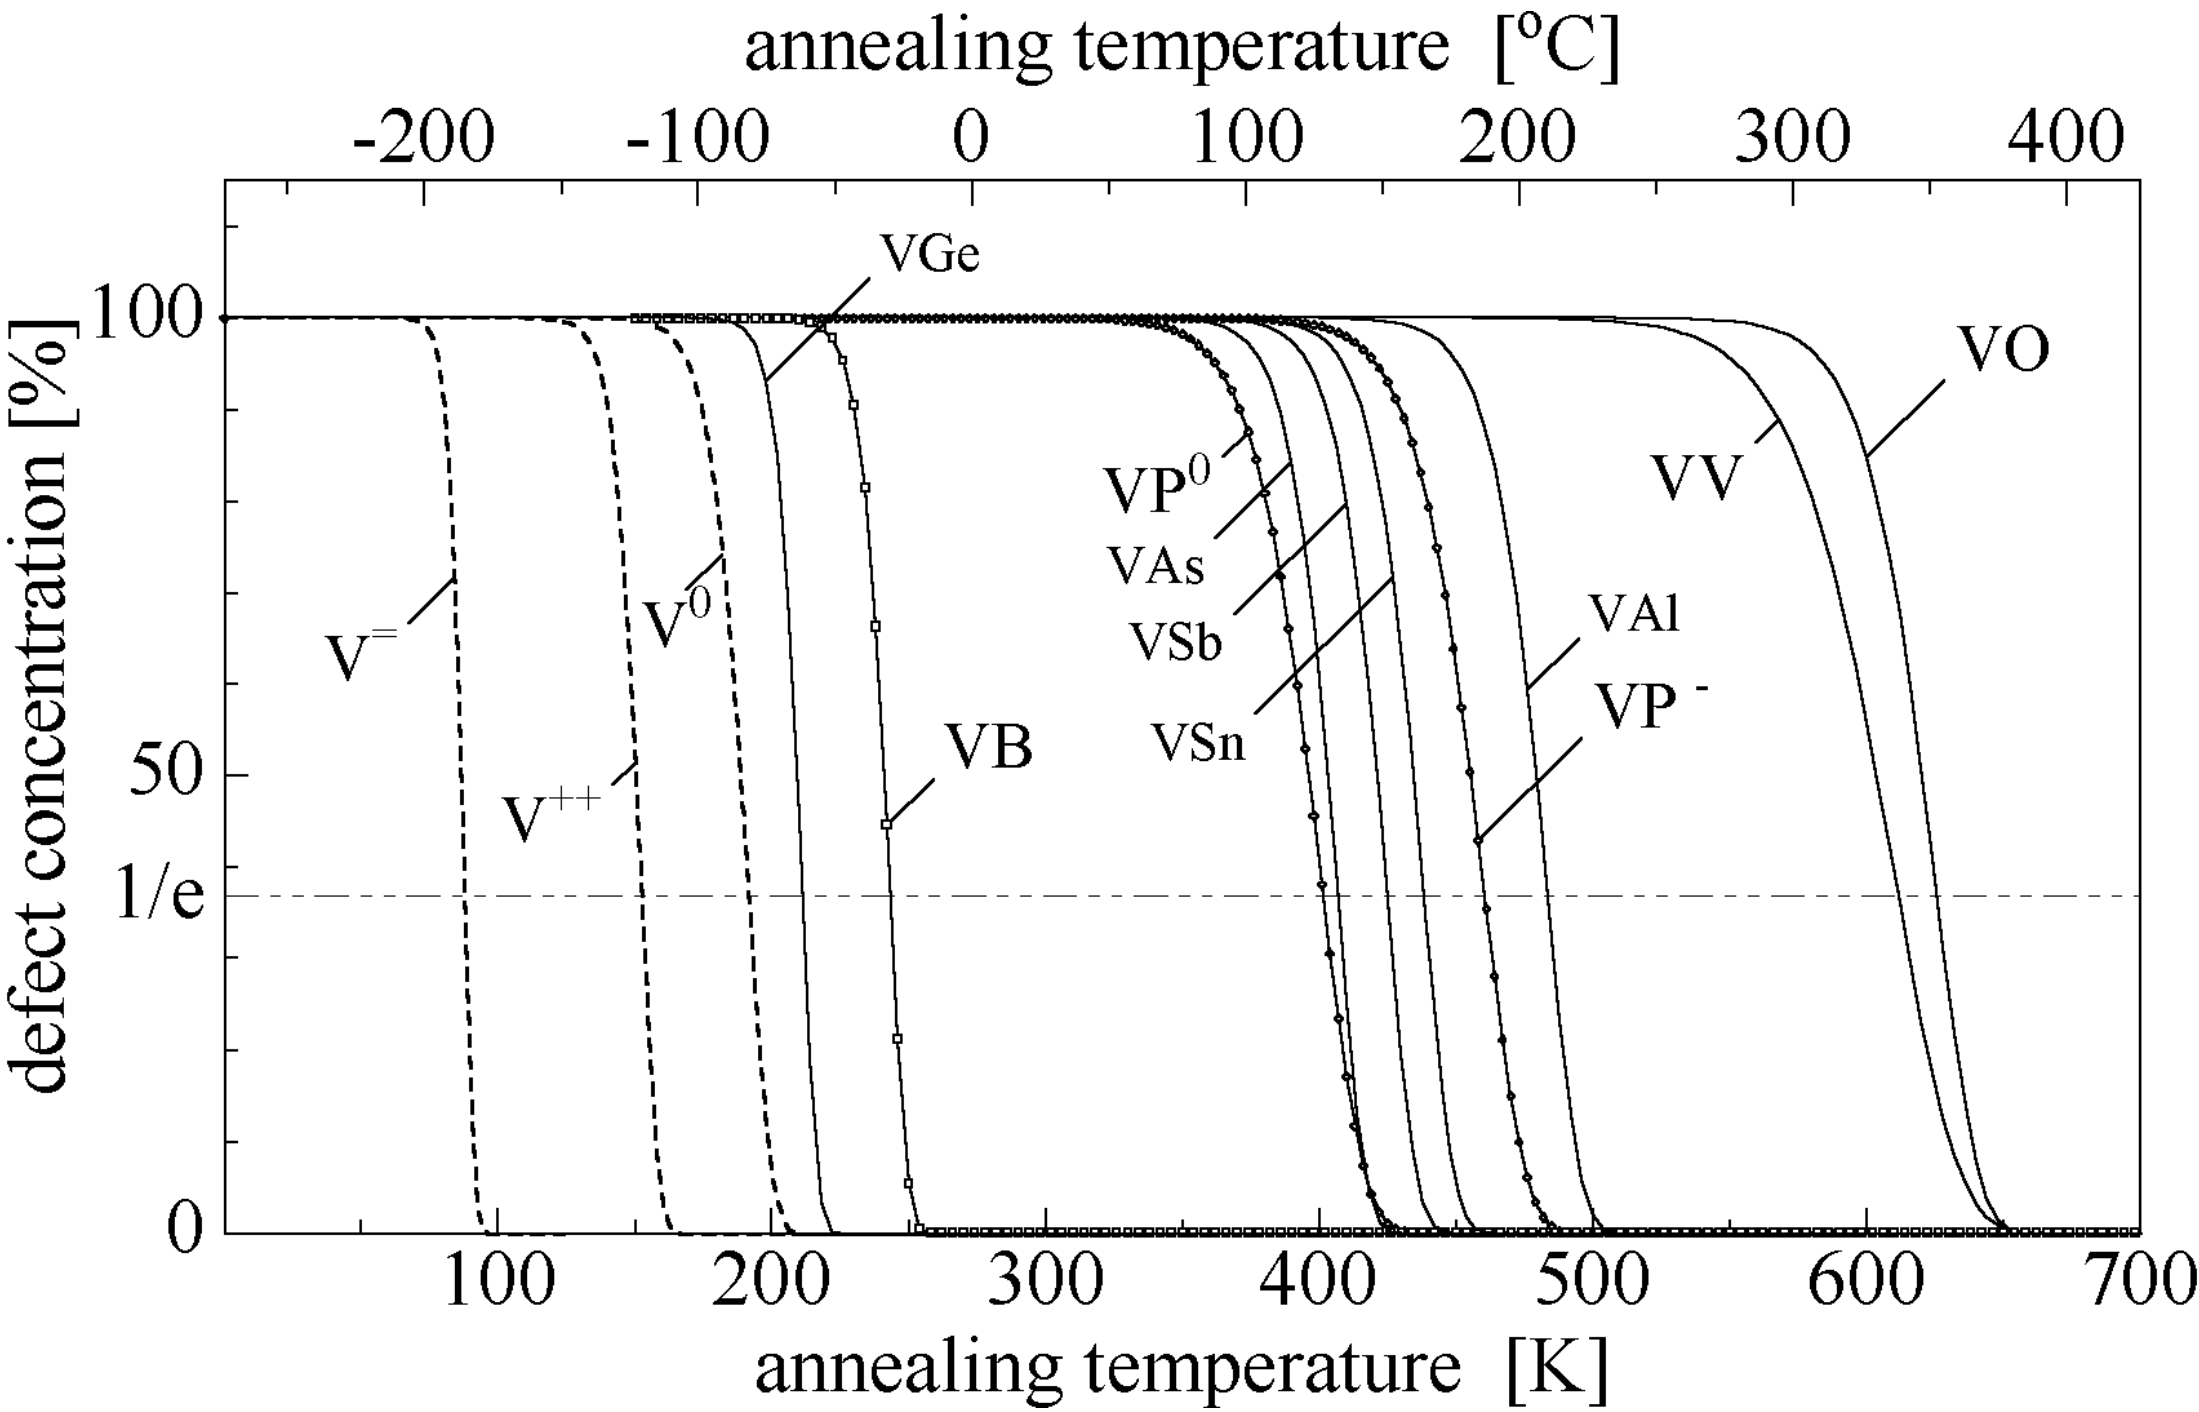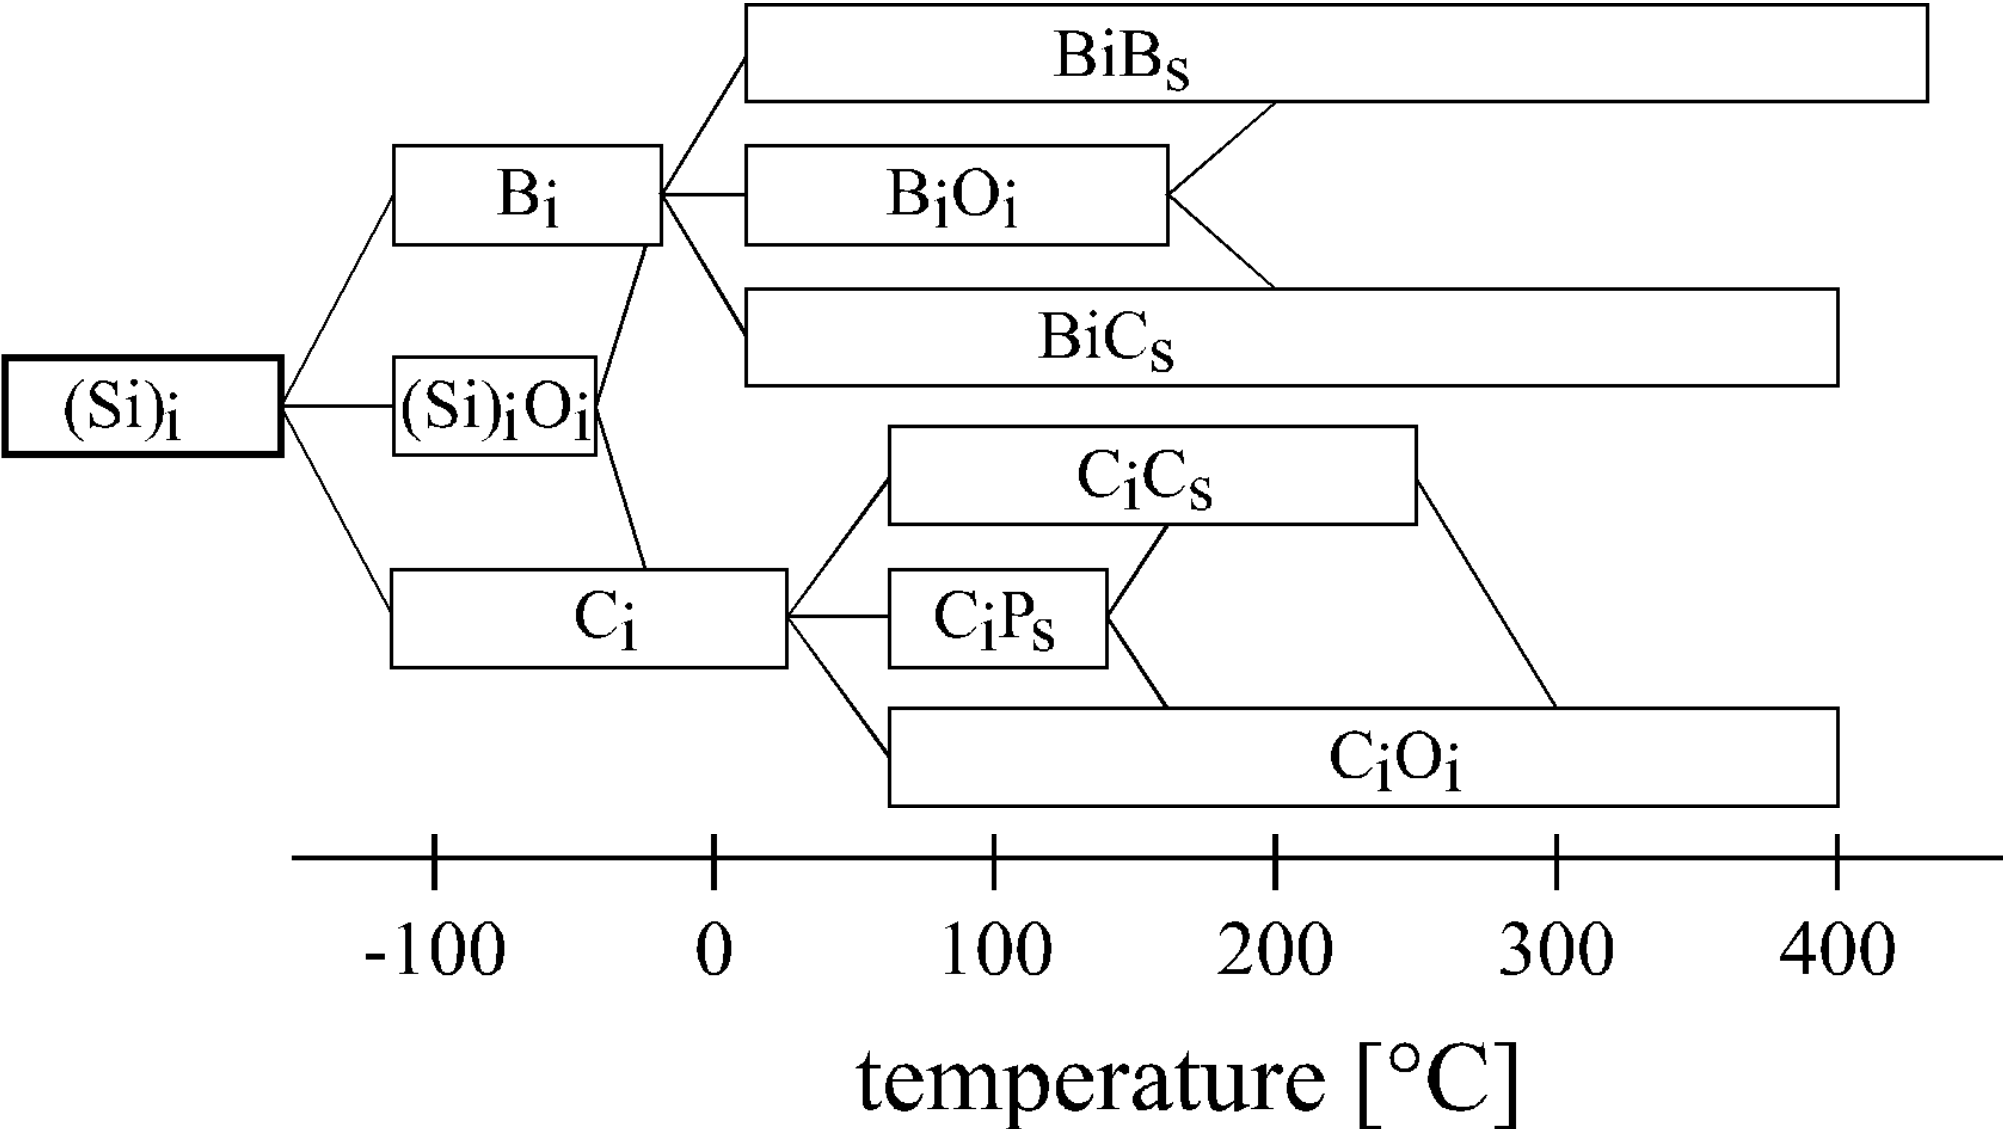

CC-DLTS, I-DLTS

DLTS is limited in the defect concentration that it can detect

- This must be lower than the effective doping of the unirradiated substrate

To counter this there are additional DLTS flavours, where the voltage applied to the junction is varied to keep the capacitance constant (CC-DLTS)


- The voltage pulse is then analysed to determine the defect concentration

A hybrid of TSC and DLTS also exists: current DLTS (I-DLTS)

- The DLTS method is followed, but it is the current transient that is measured
- This has the advantage that it can be applied to insulators and to samples with high defect concentrations

Infrared spectroscopy has long been used in chemistry to identify different interatomic bonds - can be similarly useful for defects in silicon

- Excitation of bonds by infrared illumination - need thin samples to do transmission measurements
- Measurements more easy to disentangle at **low temperature**
- Sensitive to defect concentrations from 10^{13} - 10^{15} cm^{-3}


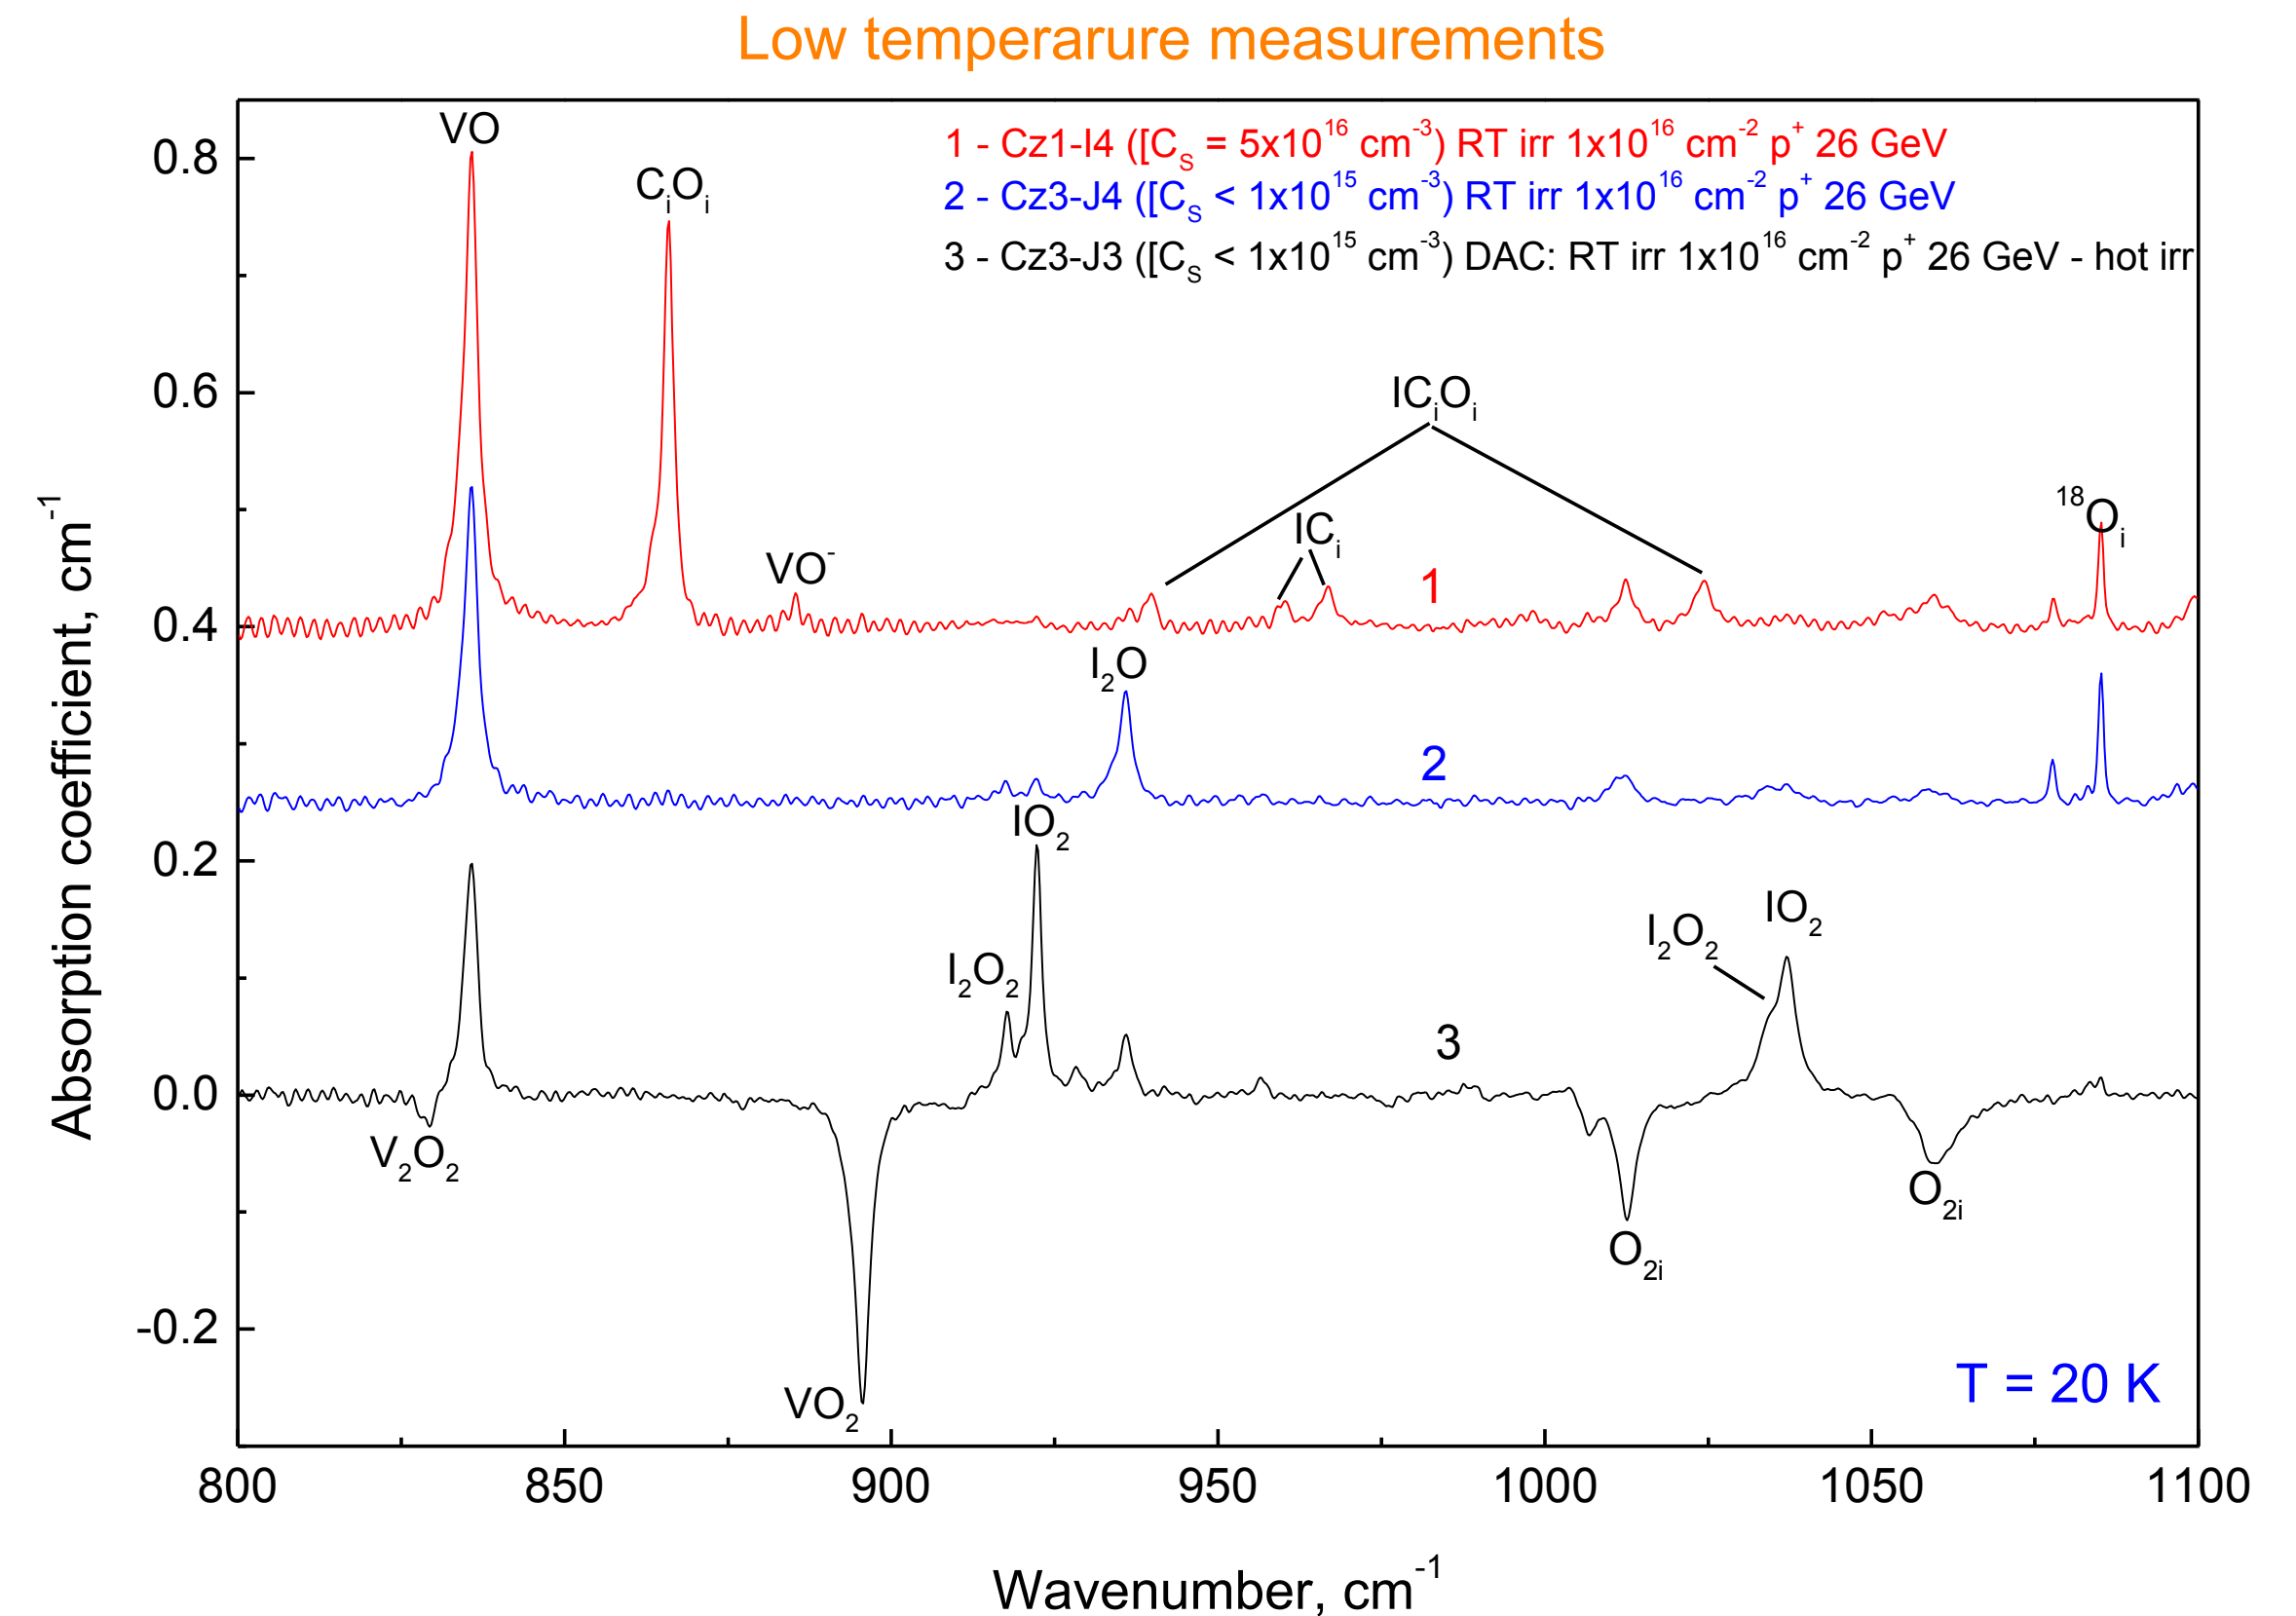


Electron Paramagnetic Resonance



M.Moll, RD50 Workshop, IP2I Lyon, 2021

EPR is analogous to Nuclear Magnetic Resonance (NMR)
but acts on electrons

- Effective energy splitting due to presence of an external magnetic field - cf. Zeeman effect
- Can be used to study the presence of paramagnetic defects

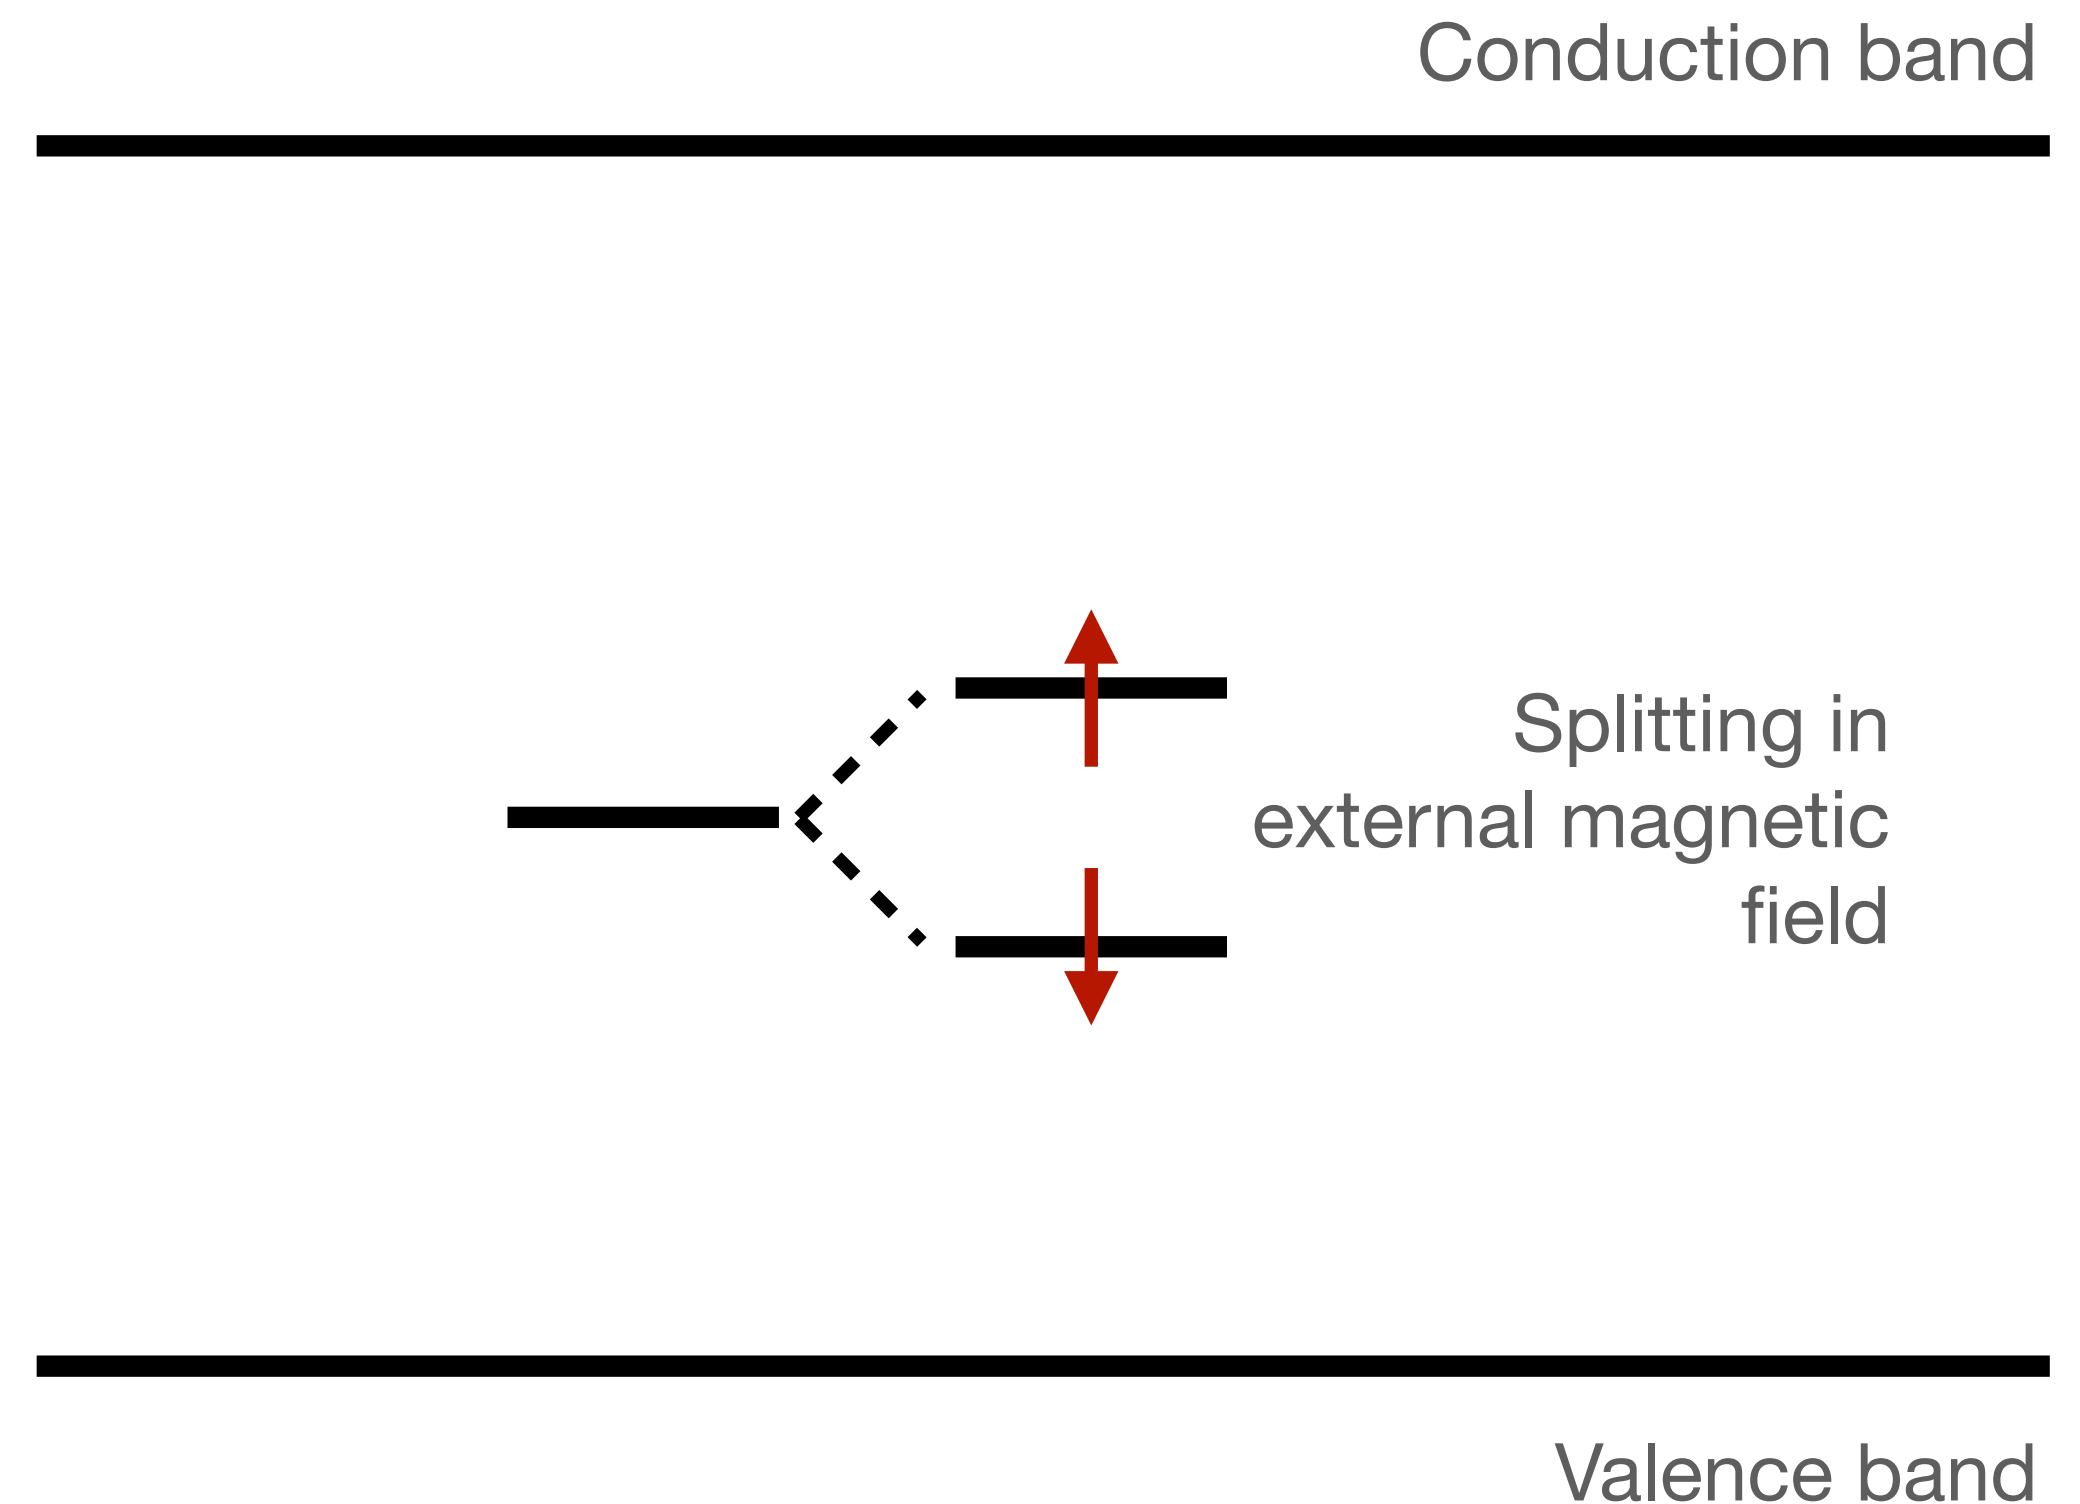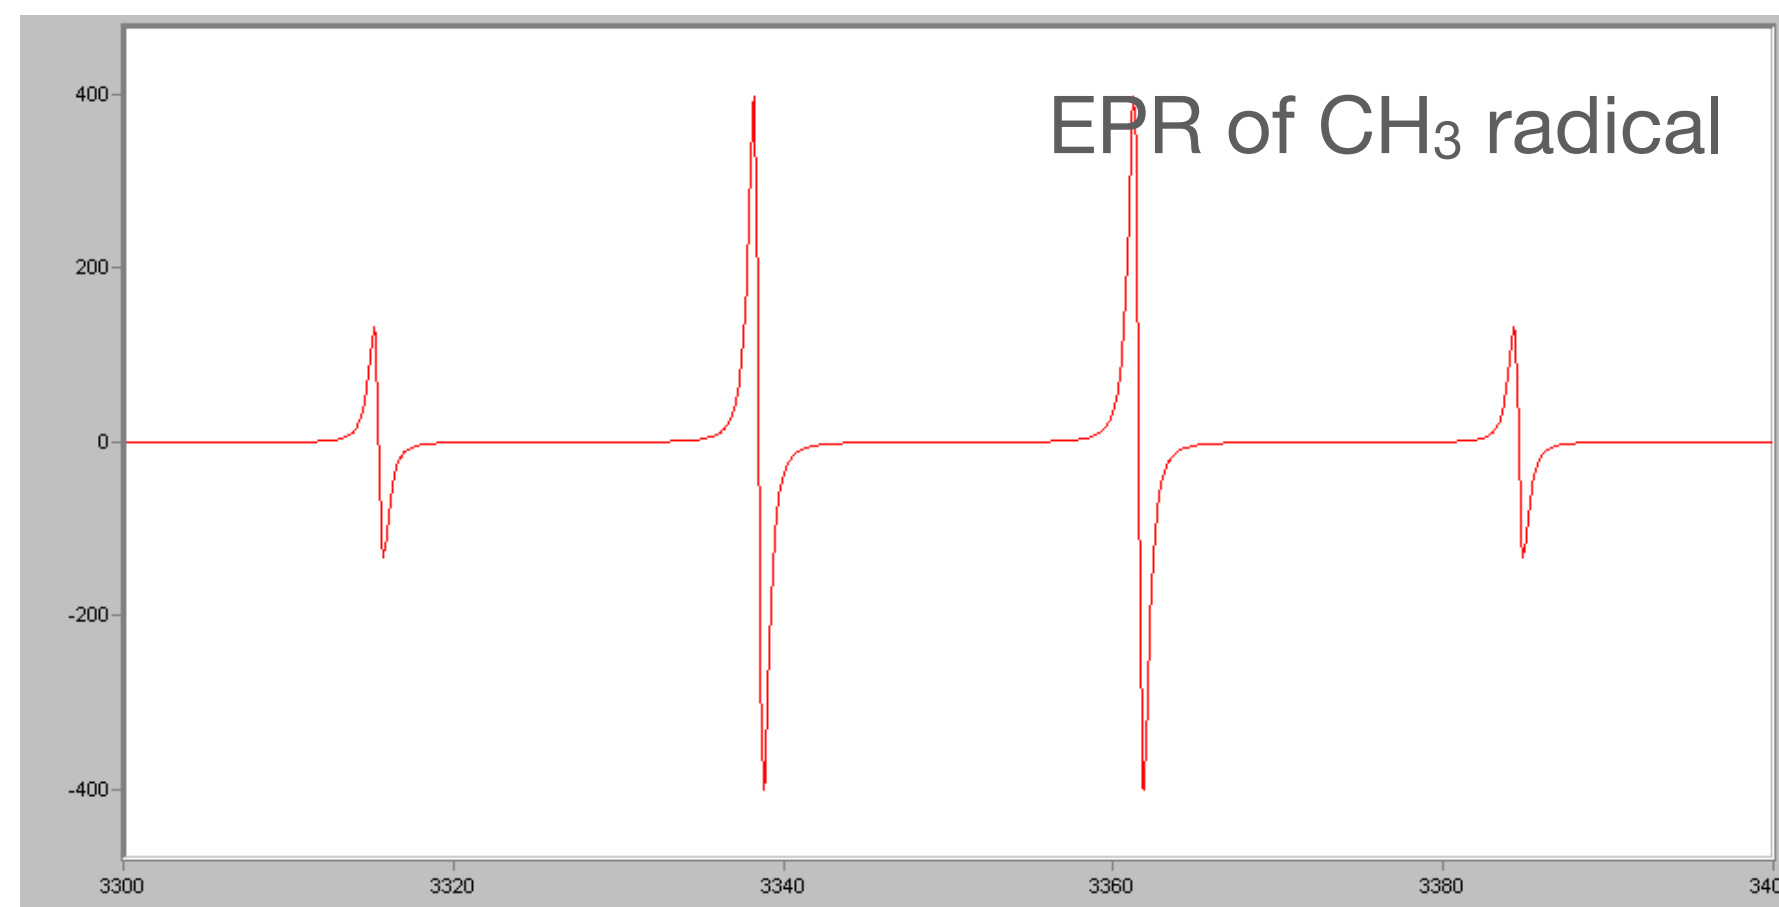

Variation of ESR spectra with measuring temperature (120K) and (50 K).

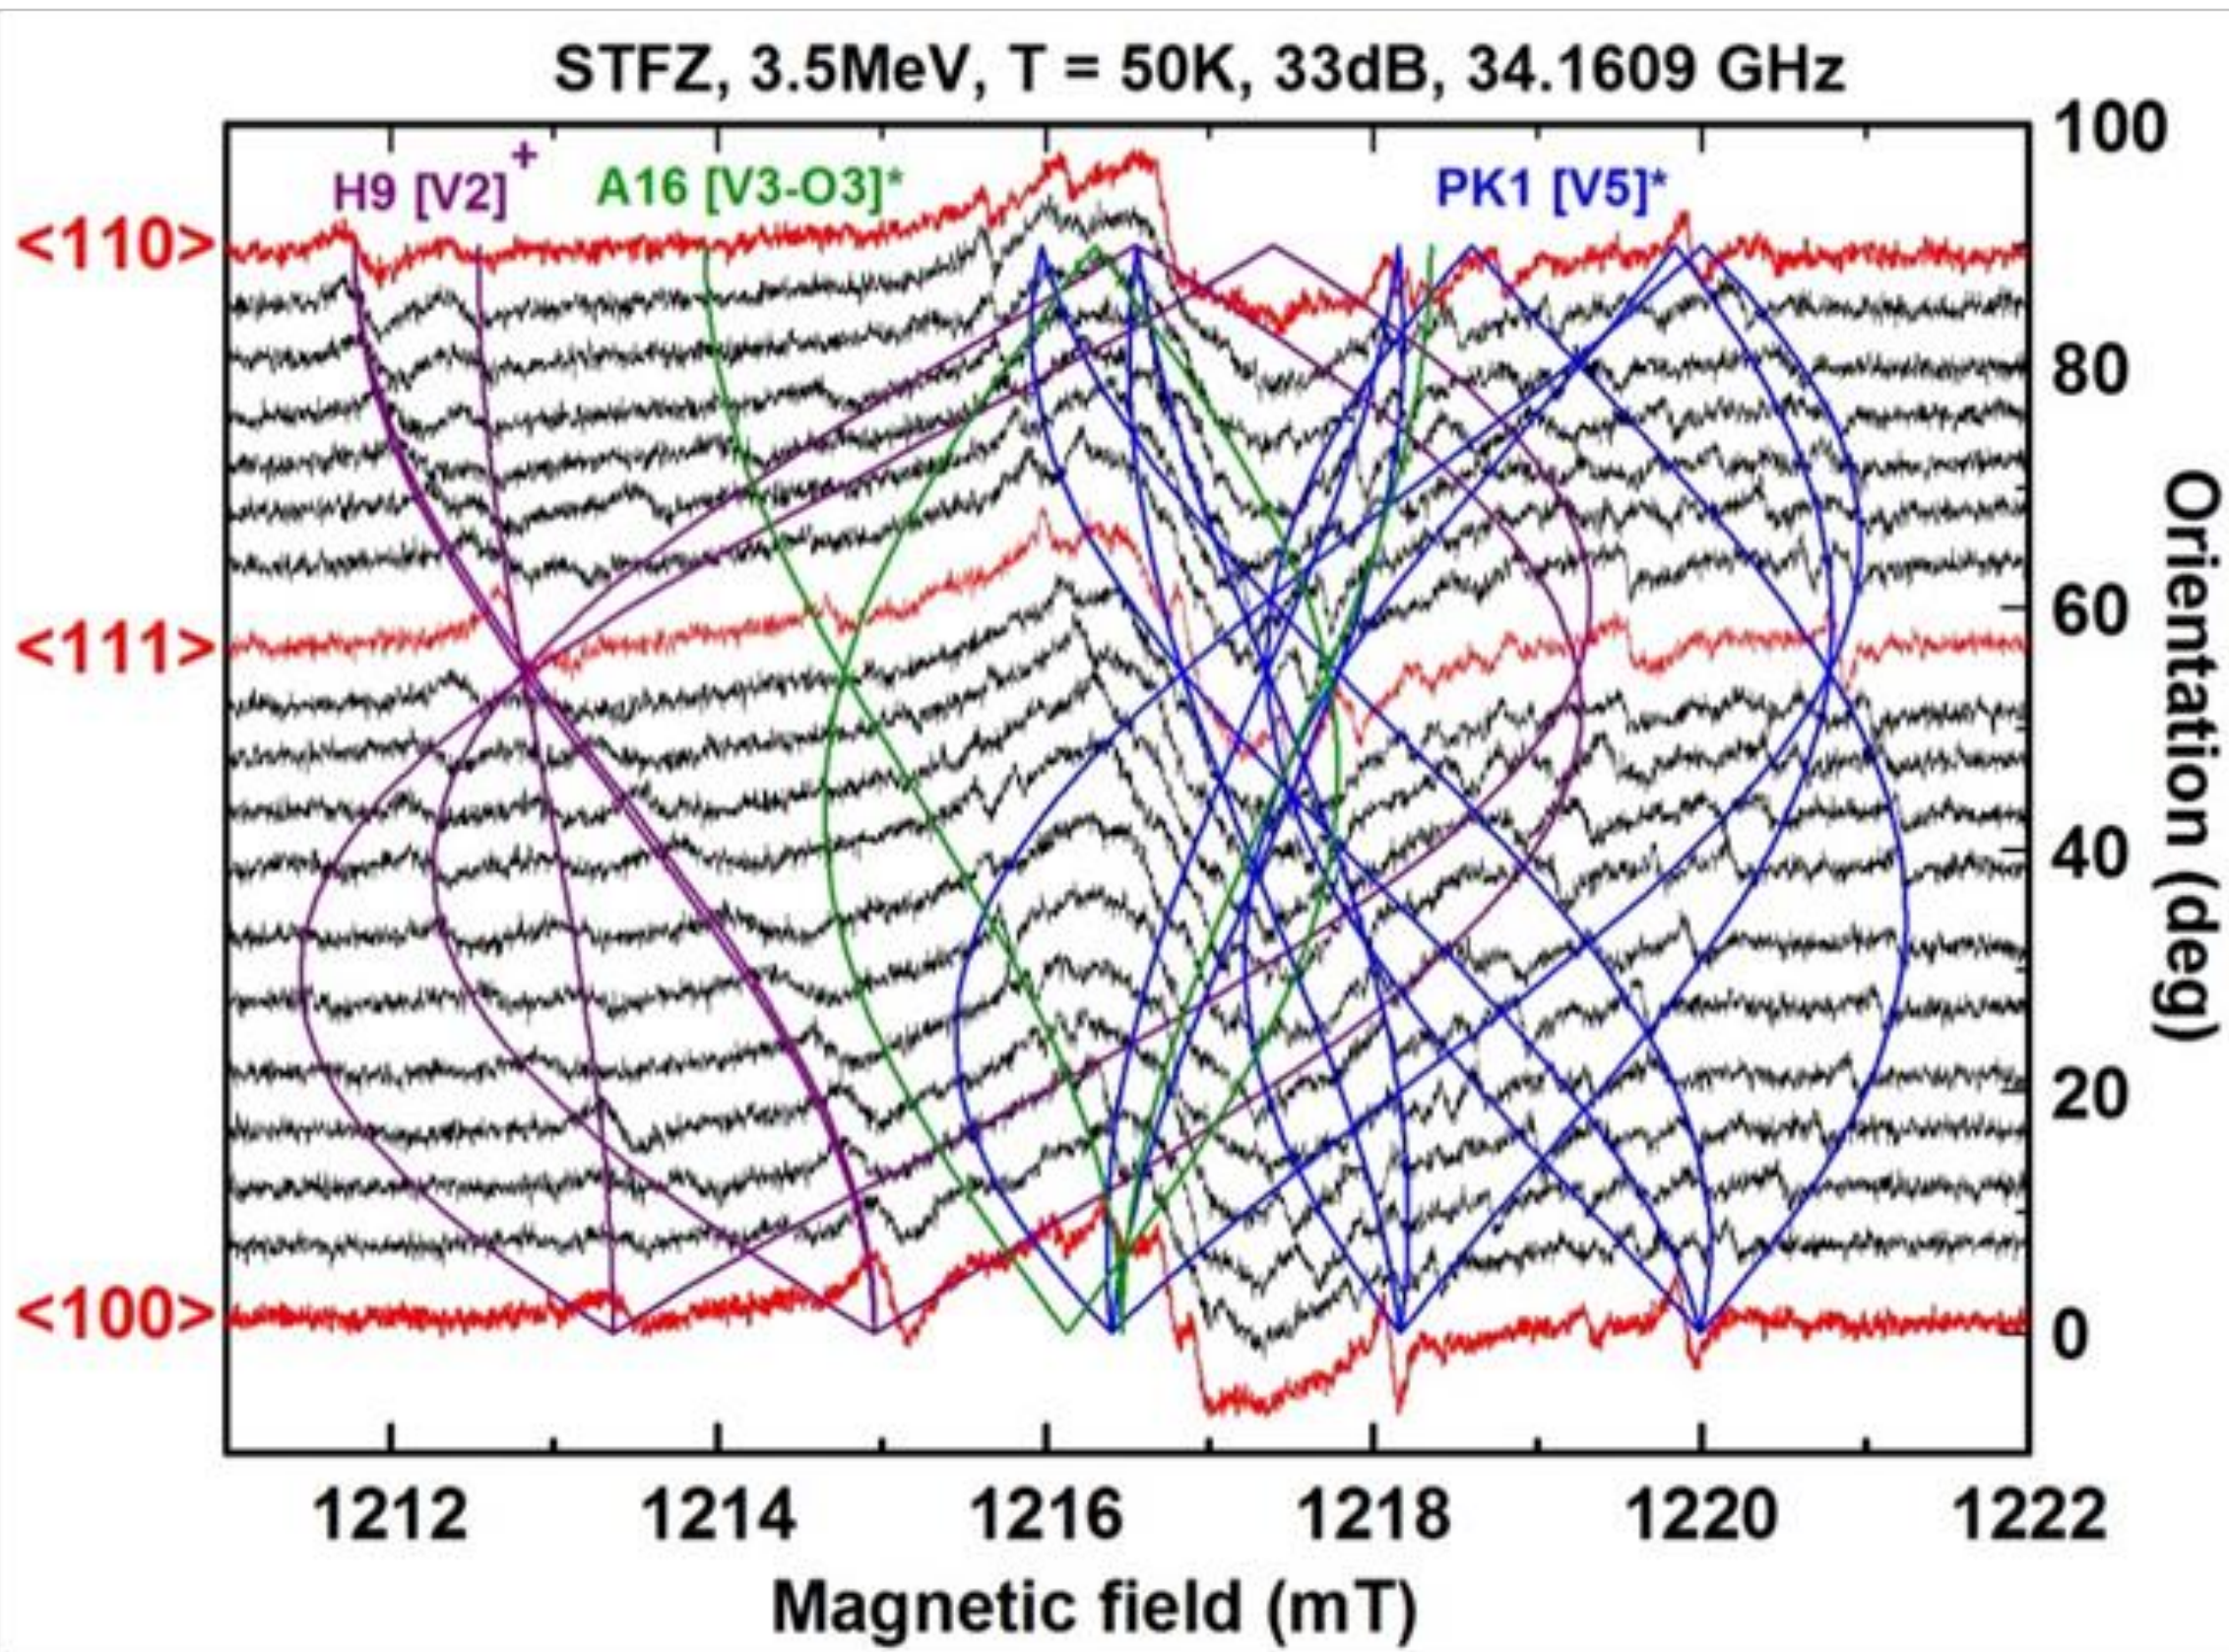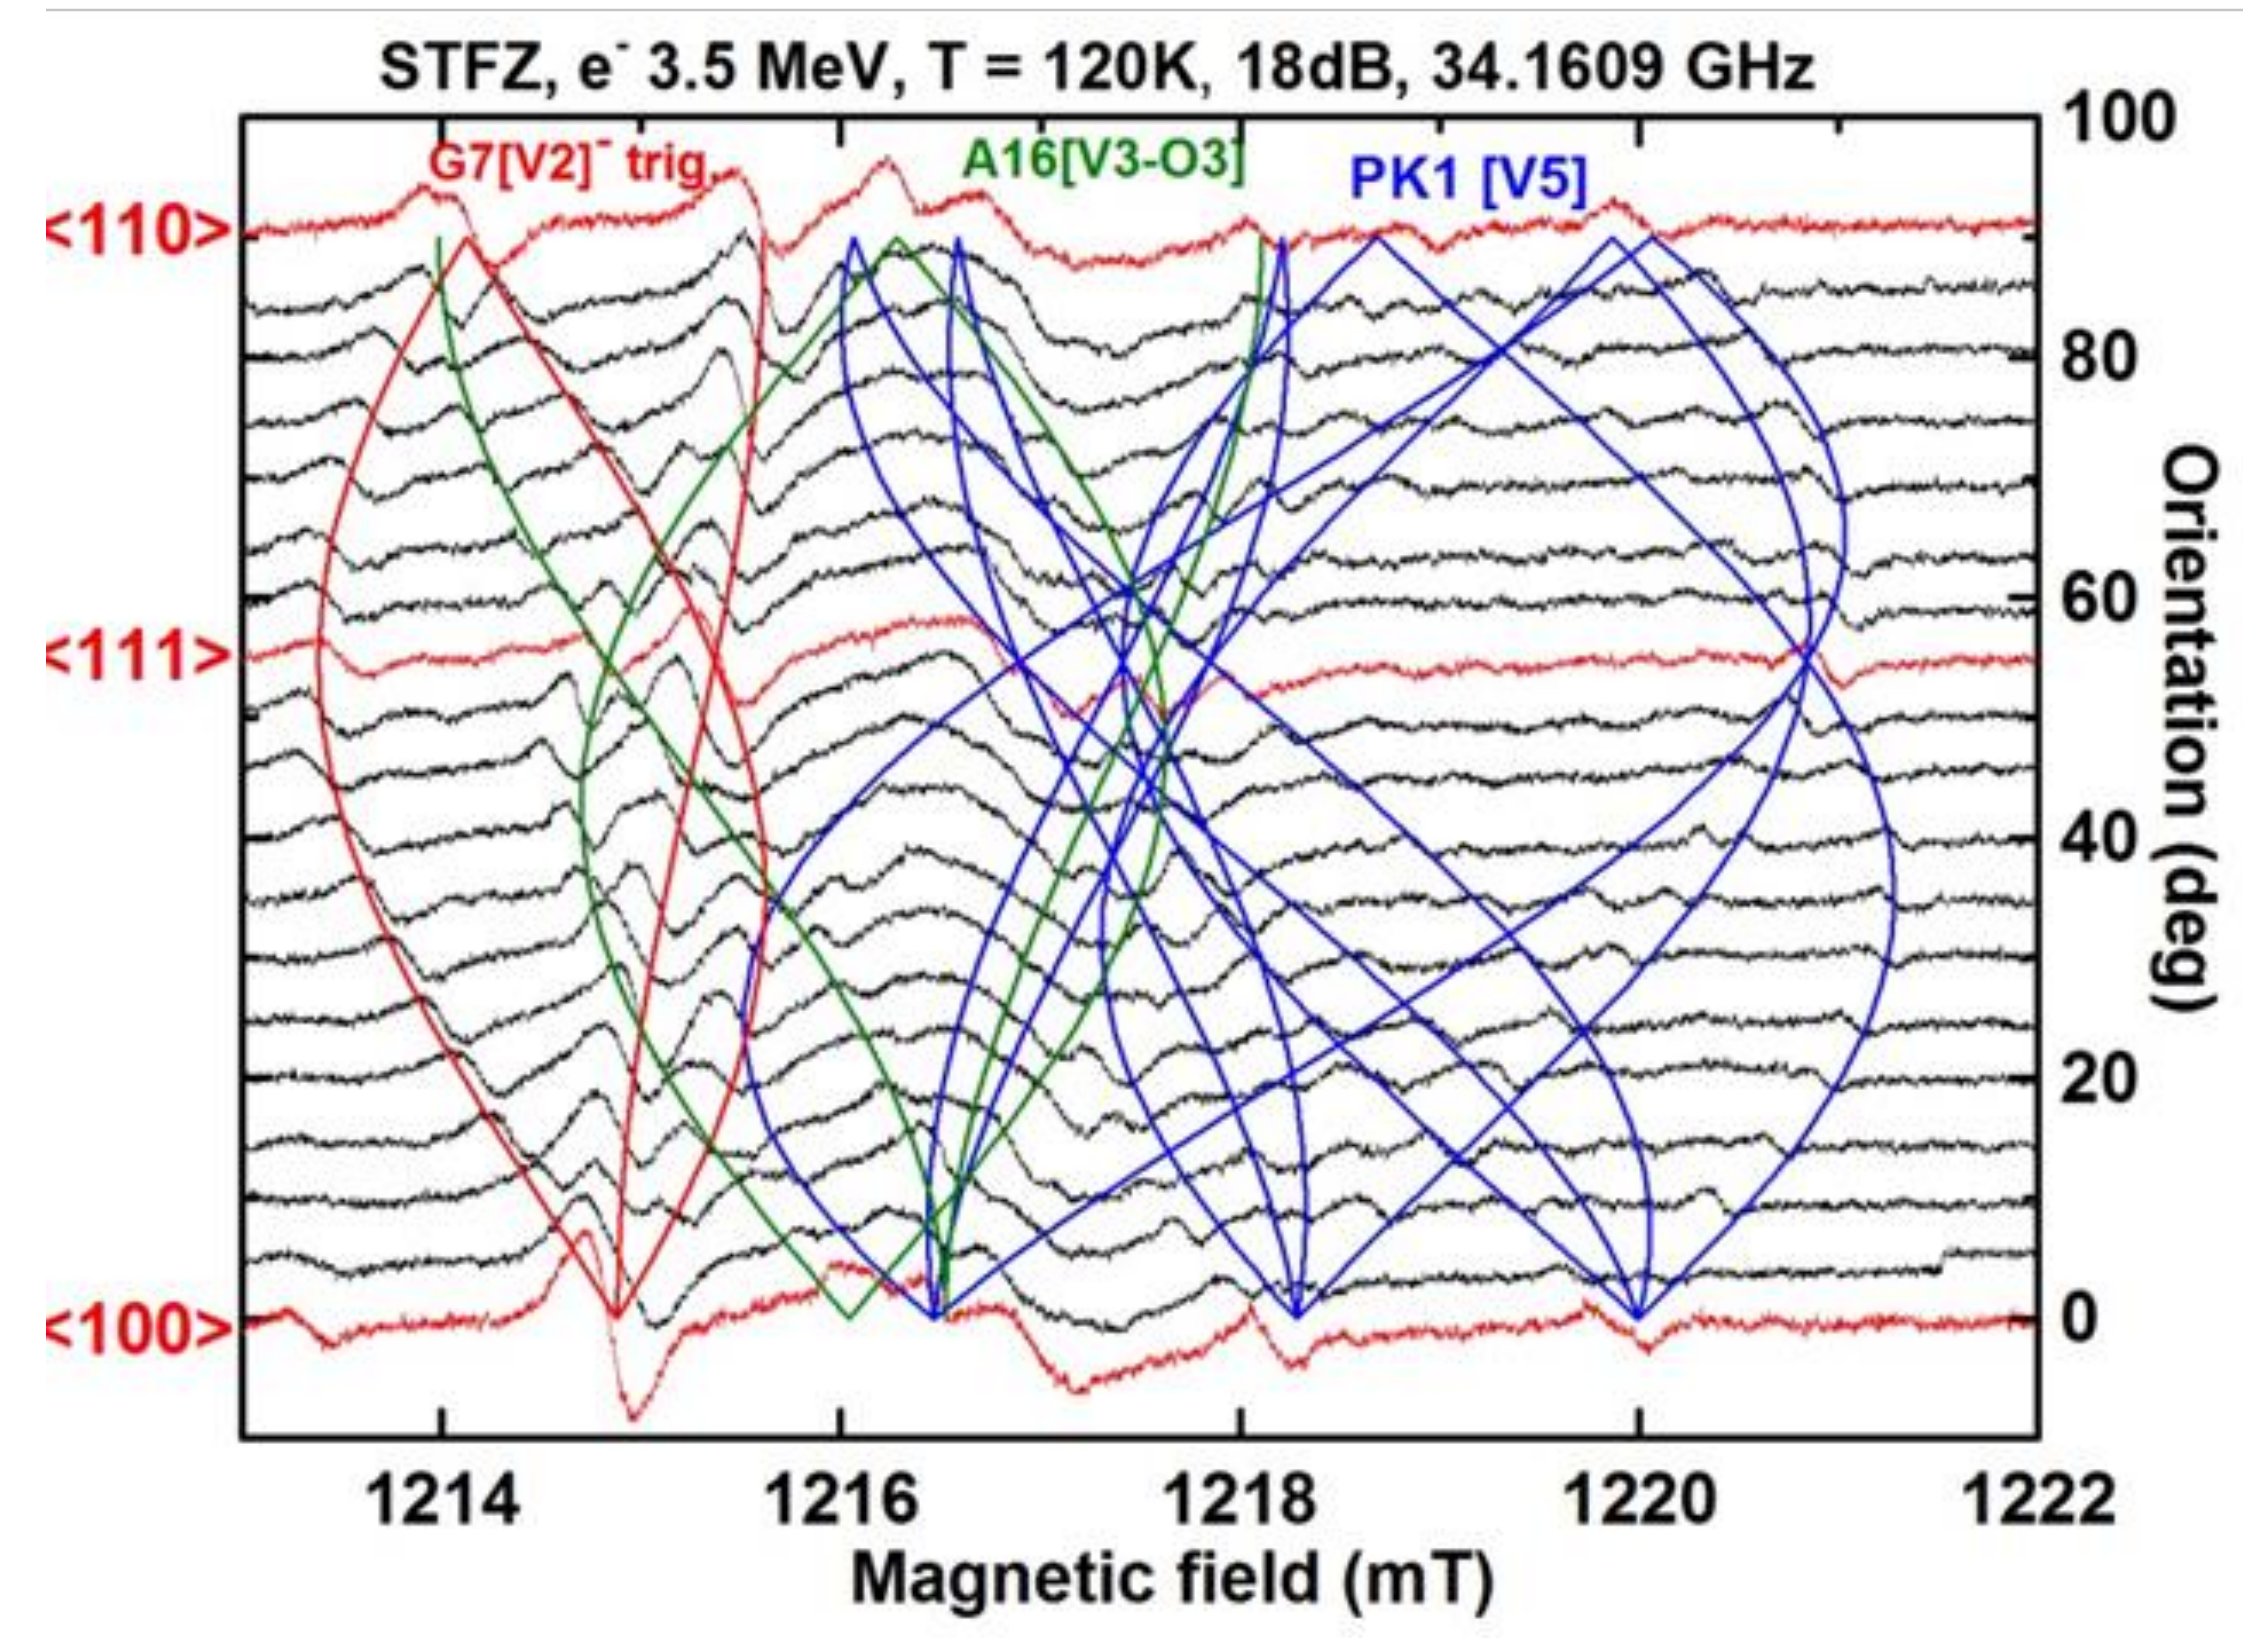

Summary

Solid-state physics is messy and difficult...

TSC and DLTS (with many variations) form part of a myriad of probing techniques that can be used to investigate energy levels within the band structure of semiconductors

- TSC fills traps once, and heats at a constant rate to observe carriers escaping
- DLTS looks for transient observables at every temperature

There many other techniques which can be exploited, but interpretation is challenging!

- It is always important to understand the details of how the measurement was performed and how (and when) traps were filled, and by which carriers

Part 2 (TCT) will commence at XX:XX BST

Go grab a coffee :-)